

Type overview and components

Cable ladder systems

Type LG 45

Side height: 45 mm
Plate thickness: 1.25 mm

Galvanisation types:

- Strip galvanisation
- Hot-dip galvanisation

Properties:

- Perforated, with NS rung (standard rung) with slot width 12 mm



Type SLG 45


Side height: 45 mm
Plate thickness: 2.0 mm

Galvanisation types:

- Strip galvanisation
- Hot-dip galvanisation

Properties:

- Perforated, with NS rung (standard rung) with slot width 12 mm

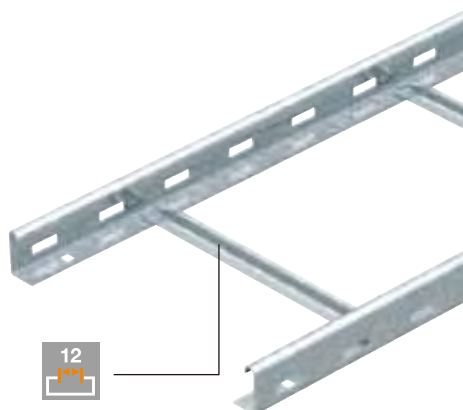

Type LG 60 NS

Side height: 60 mm
Plate thickness: 1.5 mm

Galvanisation types:

- Strip galvanisation
- Hot-dip galvanisation

Properties:

- Perforated, with NS rung (standard rung) with slot width 12 mm



Connection and separation

LG 45 and SLG 45

Side height 45 mm



Fittings LG 45 and SLG 45

Side height 45 mm



Accessories for all types

Side height 45, 60, 110 mm



Connection and separation

LG 60 NS and LG 60 VS

Side height 60 mm



Fittings LG 60 NS

Side height 60 mm
with NS rung



Suitable U clamp 2056 N



		Usable cable tray cross-section in cm ²				
		Cable ladder widths in mm				
		200	300	400	500	600
Side height	45	68	103	138	173	208
	60	98	148	198	248	298
	110	188	283	378	475	568

Type LG 60 VS



Side height: 60 mm
Plate thickness: 1.5 mm

Galvanisation types:

- Strip galvanisation
- Hot-dip galvanisation

Properties:

- Perforated with VS rung (reinforced rung) with 16 mm slot width

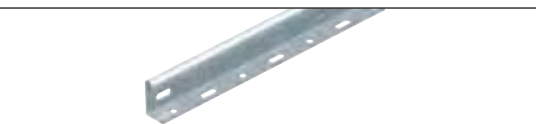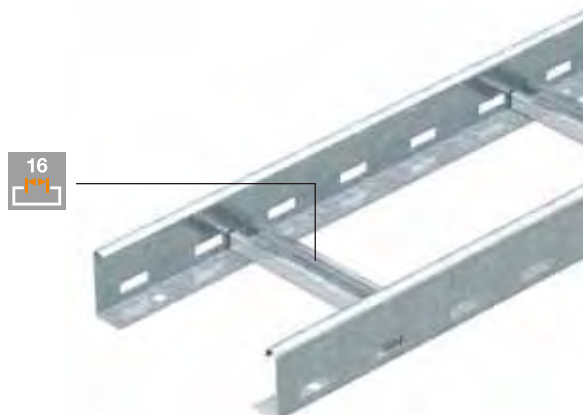

Fittings LG 60 VS

Side height 60 mm
with VS rung



Type LG 110 VS


Side height: 110 mm
Plate thickness: 1.5 mm

Galvanisation types:

- Strip galvanisation
- Hot-dip galvanisation


Properties:

- Perforated, with NS rung (reinforced rung) with slot width 16 mm

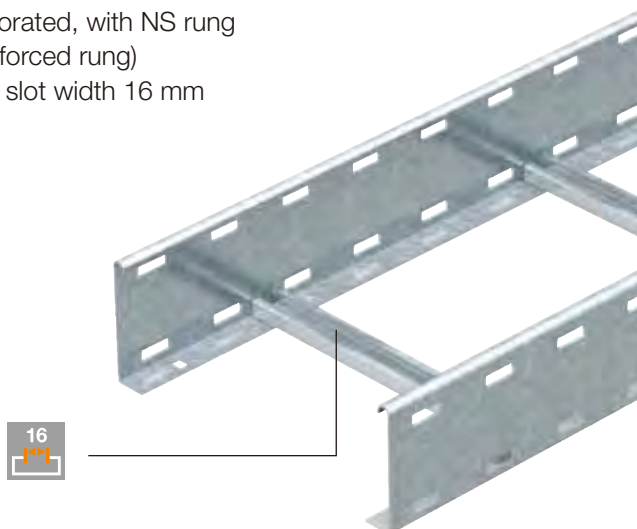

Connection and separation, LG 110 VS

Side height 110 mm

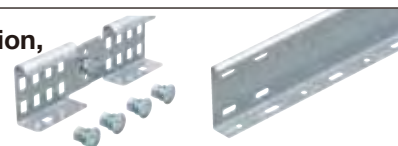

Fittings LG 110 VS

Side height 110 mm
with VS rung



Suitable U clamp 2056

