



Brack-Its

- Used to mount traffic signs, security devices, and enclosures.
- Withstands stress and wind vibration with specially designed reinforcement ribs.
- Fully threaded to solidly anchor attachment bolts.
- Hex head bolts with metal and fiber washer, no nuts required.
- Applied with BAND-IT® Band and Buckles, VALU-STRAP™, VALU-STRAP Plus™, BAND-FAST™ or Ultra-Lok® Systems.

Mini Brack-It						
Part No.	Description	Thickness In mn		Package Lbs	Weight Kg	
D31099	Flared Leg mini-Brack-It, SS with SS bolt and fiber washer, 1/2" slot	0.050 1.2	7 50/box	3.0	1.5	
D31599	Straight Leg mini-Brack-It, SS, with SS bolt and fiber washer. 1/2" slot	0.050 1.2	7 50/box	3.0	1.5	
D30288	5/16-24 x 1/2" Hex Head SS bolt, washer and fiber washer for mini-Brack-It		50/box	1.0	0.5	

Single Bolt Flared Leg Brack-It

Part No.	Description	Thickness In mm	Package Quantity	Package Weight Lbs Kg
D02189	Single bolt flared leg SS Brack-It with SS bolt, washer and fiber washer. 3/4" slot	0.070 1.78	50/box	7.0 3.2
D02299	Single bolt flared leg SS Brack-It only. 3/4" slot	0.070 1.78	50/box	5.5 7.5

Single Bolt Straight Leg Brack-It

Part No.	Description	Thickness In mm	Package Quantity	Package Weight Lbs Kg
D00189	Single bolt straight leg SS with SS bolt, washer and fiber washer. 3/4" slot	0.070 1.78	50/box	7.0 3.2
D00499	Single bolt straight leg SS Brack-It only. 3/4" slot	0.070 1.78	50/box	5.6 2.5

2-Bolt Brack-It

Part No.	Description	Thickness In mm	Package Quantity	Package Lbs	Weight Kg
D00889	2 bolt straight leg SS Brack-It with SS	0.070 1.78	50/box	9.2	4.2
	Bolt, washer, and fiber washer. 3/4" slot				
D00999	2 bolt straight leg SS Brack-It only.	0.070 1.78	50/box	7.1	3.2
	3/4" slot				


Ro	Its and	Wael	nare fo	r Brac	k_lte
■ ".\".				T DI a C	

		Package	Package Weigh	
Part No.	Description	Quantity	Lbs	Kg
D00299	5/16"-18 x 3/4" Hex Head SS bolt,	50/ bag	1.3	0.6
	washer and fiber washer			

L-Mount Right Angle Brack-It					
Part No.	Description	Package Quantity	Packa: Lbs	ge Weight Kg	
D00799	L-Mount right angle Brack-It, 0.070" thick SS, includes two bolt holes suitable for 5/16" or 1/4" bolts. Solid anchor for signs mounted at right angle. Does not include bolts.	50/box	4.4	2.0	





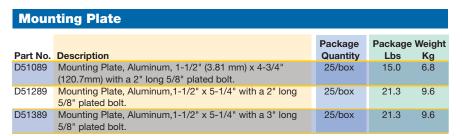

- Aluminum extruded plate with 5/8 11 x 2" (50.8mm) plated bolt and nut.
- Available in two different sizes.
- Band slot width 1.375" to accommodate a single or double wrap of our 1 1/4" wide x .044 thick Giant Band.

BAND-IT® Bolt/Clamp					
Part No.	Description	Package Quantity	Package Lbs	Weight Kg	
D50089	Bolt/Clamp. Includes a 3/8-16 X 6.0" carriage bolt. Slot will accommodate 3/4" width Giant Band	50/box	23.7	10.8	
D50489	Bolt/Clamp. Includes a 5/8-11 X 8.0" carriage bolt. Slot will accommodate 1-1/4" width Giant Band	25/box	33.0	15.0	

- Aluminum extruded housing with plated carriage bolt, nut and washer.
- Can be used with Giant Band.

Signal Mounts 1-1/2" NPT					
		Package	Package	Weight	
Part No.	Description	Quantity	Lbs	Kg	
D04099	Signal Mount,1-1/2" NPT	25/box	19.4	8.8	
D04599	Narrow Back Signal Mount, 1-1/2" NPT	25/box	18.3	8.3	

- Attach to pole with 3/4" Ultra-Lok®, BAND-FAST™ or BAND-IT® Band.
- Radius of standard Signal Mount accommodates a large range of pole diameters.
- Narrow Back Signal Mount can be used on small diameter poles or for mounting on poles with flat surfaces.



variety of colors and types providing superior performance and manufactured with your specific application in mind. Whether you are color-matching decorative light poles, identifying materials, or matching existing hardware on specific projects, COLOR-IT™ has the right coating for your project needs. Products coated with COLOR-IT™ work with standard banding tools.







BAND-IT Can Match Any Color. Call for Quote.

COLOR-



D51089 Mounting Plate



BAND-IT® Bolt/Clamp



Signal Mounts