



Enclosures and equipment

Atlantic steel	P. 390 Selection chart	P. 392 Wall mounting steel enclosures IP 55 - IK 10	P. 393 Wall mounting steel enclosures with glass window IP 55 - IK 10	P. 393 Equipment and accessories	P. 394 Dimensions
Atlantic stainless steel	P. 390 Selection chart	P. 396 Wall mounting stainless steel enclosures IP 66 - IK 10	P. 396 Wall mounting stainless steel enclosures with glass window IP 66 - IK 10	P. 397 Dimensions	
Marina GRP	P. 390 Selection chart	P. 398 Wall mounting GRP enclosures IP 66 - IK 10	P. 398 Wall mounting GRP enclosures with glass window IP 66 - IK 10	P. 399 Dimensions	P. 400 Free standing GRP enclosures IP 66 - IK 10
Equipment and locking accessories	P. 401 Mounting plates	P. 401 Internal doors and insulated modular chassis	P. 402 Equipment and accessories	P. 403 Dimensions	P. 404 Locking accessories
Enclosure air conditioning	P. 405 Ventilation fan kits	P. 405 Ventilation and heating	P. 406 Operating principles and dimensions		
Industrial plastic boxes	P. 409 Selection chart	P. 410 PS range with membrane glands IP 55 - IK 07	P. 411 PS and PP range with smooth sides IP 55 - IK 07	P. 411 PC range with smooth sides IP 66 - IK 08	P. 413 PVC range with smooth sides IP 55 - IK 07/08

New in 2007



Atlantic steel wall mounting enclosures RAL 7035 (p. 392)



Marina wall mounting and free standing enclosures RAL 7035 (p. 398)



Ventilation and heating (p. 405)

Atlantic and Marina enclosures and equipment

EXTERNAL DIMENSIONS (nominal)				ATLANTIC ENCLOSURES				MARINA ENCLOSURES		EQUIPMENT										ASSOCIATED PRODUCTS	
				STEEL IP 55 - IK 10 GREY RAL 7035 : GREY RAL 7035 with window		STAINLESS STEEL IP 66- IK 10 Stainless 304 L Stainless 304 L with window		POLYESTER (GRP) IP 66 - IK 10 GREY RAL 7035 : GREY RAL 7035 with window				Plain plates pre-galv. steel	Lina 12-5 perforated plates	Lina 25 perforated plates	Lina 25 sectioned uprights	Lina 25 crosspieces	Modular chassis	Internal doors	Roofs	Plinths	
	400	300	150	0355 09 ⁽¹⁾							0360 52	0360 04	0360 12	0361 51	0367 80		0363 59 ⁽³⁾				
	300	200	160	0355 00 ⁽¹⁾ Supplied with plain plate		0352 00 Supplied with plain plate		0362 50			0360 49 ^(M) 0360 50 ^(A)	0360 00 ^(A) 0360 01 ^(M)	0360 07 ^(A)	0361 50 ^(A)							
	400	300	200	0355 02	0354 92	0352 01	0352 21	0362 51	0362 71		0360 52	0360 04	0360 12	0361 51	0367 80	0361 01	0363 59 ⁽³⁾				
	500	400	200	0355 03	0354 93	0352 02	0352 22	0362 52	0362 72		0360 55	0360 09	0360 15	0361 52	0367 81	0361 02	0363 60 ⁽³⁾				
	600	400	200	0355 04		0352 03	0352 23				0360 56	0360 22	0360 16	0361 53	0367 81		0363 61 ⁽³⁾				
	500	400	250	0355 07							0360 55	0360 09	0360 15	0361 52	0367 81		0363 60 ⁽³⁾				
	600	400	250	0355 08	0354 94	0352 05	0352 25	0362 55	0362 75		0360 56	0360 22	0360 16	0361 53	0367 81	0361 03	0363 61 ⁽³⁾				
	700	500	250	0355 12	0354 95	0352 06	0352 26	0362 56	0362 76		0360 58	0360 31	0360 18	0361 54	0367 82	0361 05	0363 62 ⁽³⁾	0362 93 ^(M)			
	800	600	250	0355 14							0360 59	0360 33	0360 19	0361 55	0367 83		0363 63 ⁽³⁾				
	1000	600	250	0355 17							0360 54	0360 40	0360 23	0361 56	0367 83						
	1000	800	250	0355 18							0360 61	0360 42	0360 21	0361 56	0367 84		0363 64 ⁽³⁾				
	700	500	300	0355 22							0360 58	0360 31	0360 18	0361 54	0367 82		0363 62 ⁽³⁾				
	800	600	300	0355 23	0354 96	0352 11	0352 31	0362 61	0362 81		0360 59	0360 33	0360 19	0361 55	0367 83	0361 06	0363 63 ⁽³⁾	0362 94 ^(M)		0363 00 ^(A) 0362 91 ^(M)	
	1000	600	300	0355 26							0360 54	0360 40	0360 23	0361 56	0367 83					0363 00	
	1000	800	300	0355 27	0354 97	0352 13	0352 33	0362 63	0362 83		0360 61	0360 42	0360 21	0361 56	0367 84	0361 09	0363 64 ⁽³⁾	0362 95 ^(M)		0363 01 ^(A) 0362 92 ^(M)	
	1200	800	300	0355 92		0352 14		0362 64	0362 84		0360 64	0360 46	0360 87	0361 58	0367 84	0361 10	0363 65 ⁽³⁾	0362 95 ^(M)		0363 01 ^(A) 0362 92 ^(M)	
	1200	1000	300	0355 93 ⁽²⁾							0360 65	0360 47	0360 88	0361 58	0367 85				0363 02		
	1400	1000	300	0355 95 ⁽²⁾							0360 68	0360 79	0360 98	0361 59	0367 85				0363 02		
	800	600	400	0355 28							0360 59	0360 33	0360 19	0361 55	0367 83		0363 63 ⁽³⁾		0363 40		
	1000	800	400	0355 29							0360 61	0360 42	0360 21	0361 56	0367 84		0363 64 ⁽³⁾		0363 41		
	1200	800	400	0355 96							0360 64	0360 46	0360 87	0361 58	0367 84		0363 65 ⁽³⁾		0363 41		
	1400	800	400	0355 98		0352 15					0360 67	0360 75	0360 90	0361 59	0367 84				0363 41		
	300	300	150	0355 05 ⁽¹⁾							0360 69	0360 02	0360 91	0361 50	0367 80						
	300	300	200	0355 30							0360 69	0360 02	0360 91	0361 50	0367 80						
	400	400	200	0355 31							0360 70	0360 05	0360 92	0361 51	0367 81						
	500	500	250	0355 32							0360 71	0360 14	0360 93	0361 52	0367 82						
	600	600	250	0355 10							0360 57	0360 24	0360 17	0361 53	0367 83						
	800	800	250	0355 15							0360 60	0360 34	0360 20	0361 55	0367 84						
	600	600	300	0355 20							0360 57	0360 24	0360 17	0361 53	0367 83				0363 00		
	800	800	300	0355 24							0360 60	0360 34	0360 20	0361 55	0367 84				0363 01		
	1000	1000	300	0355 91 ⁽²⁾							0360 63	0360 43	0360 25	0361 56	0367 85				0363 02		
	1200	1200	300	0355 94 ⁽²⁾							0360 66	0360 48	0360 89	0361 58	0367 86				0363 03		
	600	600	400	0355 36							0360 57	0360 24	0360 17	0361 53	0367 83				0363 40		
	1200	1200	400	0355 97 ⁽²⁾							0360 66	0360 48	0360 89	0361 58	0367 86				0363 43		
	300	400	200	0355 01							0360 52 ⁽⁴⁾	0360 04	0360 11	0361 50	0367 81						
	400	600	250	0355 06							0360 56 ⁽⁴⁾	0360 22	0360 13	0361 51	0367 83						
	800	1000	250	0355 33 ⁽²⁾							0360 61 ⁽⁴⁾	0360 42	0360 94	0361 55	0367 85						
	600	800	300	0355 21 ⁽²⁾							0360 59 ⁽⁴⁾	0360 33	0360 06	0361 53	0367 84				0363 01		
	600	1000	300	0355 37 ⁽²⁾							0360 54 ⁽⁴⁾	0360 40	0360 08	0361 53	0367 85				0363 02		
	800	1000	300	0355 34 ⁽²⁾							0360 61 ⁽⁴⁾	0360 42	0360 94	0361 55	0367 85				0363 02		
	1000	1200	300	0355 90 ⁽²⁾							0360 65 ⁽⁴⁾	0360 47	0360 10	0361 56	0367 86				0363 03		

(1) Without gland plate (2) 2 doors (3) Requires Cat. No. 0363 69 when mounting in Atlantic steel (A) For Atlantic (M) For Marina (4) From mid 2007 the same plate is used for both vertical and horizontal enclosures

Atlantic steel wall mounting enclosures

■ Technical information


RAL 7035 polyester coated steel with corrosion resistant metal hinges and closure parts, suitable for general industrial environments except in areas having excessive corrosion

Properties of the polyester coating


- Polyester coating process :
 - iron phosphatisation provides good adherence
 - neutralisation of above
 - chromium passivated for corrosion resistance, neutralisation
 - application of a pure polyester coating by electrostatic dusting
- Coating thickness : 80 µm (microns)
- Mechanical characteristics : obtained on steel test bars 8/10 and 10/10 :
 - adhesion (chequer pattern and sellotape) - EN ISO 2409 : Class 0 to 1
 - Persoz hardness - EN ISO 1522 : 320 seconds
 - bending on cylindrical mandrel - EN ISO 1519 : 6 mm - cracks
 - Ericksen embossing - EN ISO 1520 : 8 mm
 - resistance to shock - EN ISO 6272-1 : 1 kg - 50 cm
- Resistance to environmental conditions :
 - saline mist - (BS) NSS Laboratory to ISO 9227 and Kq Laboratory to EN 60068-2-11 : 1 000 hours
 - sulphur dioxide SO₂ : 500 hours
 - heat : 100 °C for 168 hours - very good lustre retention
 - 150 °C for 3 hours - very good lustre retention
 - cold : -40 °C

■ Plinths



Front aperture

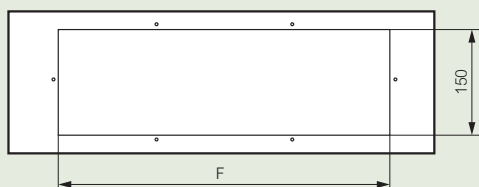

View from above - enclosure fixing

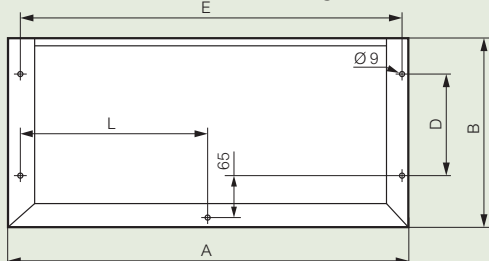

View from below - floor fixing

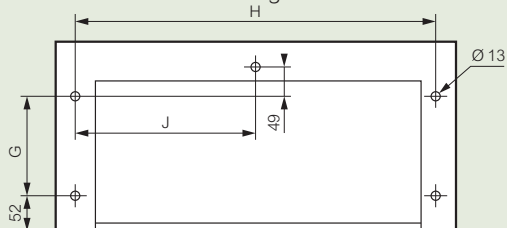


Cat. Nos.	Dimensions (mm)	A	B	C	D	E	F	G	H	J	L
0363 00	600 x 300	600	280	200	150	574	469	150	542	271	287
0363 01	800 x 300	800	280	200	150	774	469	150	742	371	387
0363 02	1000 x 300	1000	280	200	150	974	369x2	150	942	471	487
0363 03	1200 x 300	1200	280	200	150	1174	469 x 2	150	1142	571	587
0363 41	800 x 400	800	380	200	250	774	469	250	742	371	387
0363 43	1200 x 400	1200	380	200	250	1174	469 x 2	250	1142	571	587

■ Dimensions

Usable door surface area and lock positions/guides

1 door


2 doors

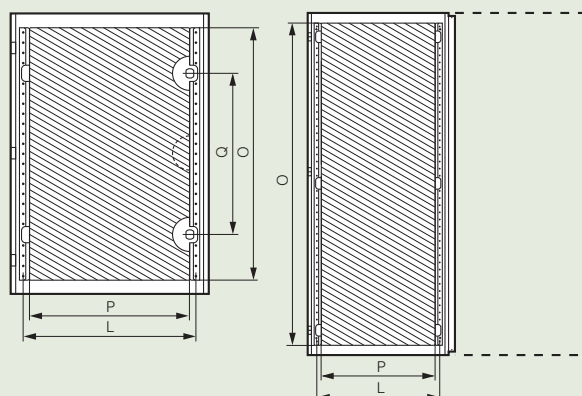

Cat. Nos.	Enclosures		Usable door area		Lock position	Upright sections
	Height (mm)	Width (mm)	O (mm)	P (mm)		
0355 00	300	200	251	148	(1)	(3)
0355 05/30	300	300	251	248	(1)	(3)
0355 01	300	400	251	348	(1)	(3)
0355 02/09	400	300	351	248	(1)	(3)
0355 31	400	400	351	348	(1)	(3)
0355 06	400	600	325	500	(1)	530
0355 03/07	500	400	425	300	(1)	330
0355 32	500	500	425	400	(1)	430
0355 04/08	600	400	525	300	350 ⁽²⁾	330
0355 10/20/36	600	600	525	500	350 ⁽²⁾	530
0355 21	600	800	525	300 x 2	(1)	330
0355 37	600	1000	525	400 x 2	(1)	430
0355 12/22	700	500	625	400	400 ⁽²⁾	430
0355 14/23/28	800	600	725	500	500 ⁽²⁾	530
0355 15/24	800	800	725	700	500 ⁽²⁾	730
0355 33/34	800	1000	725	400 x 2	(1)	430
0355 17/26	1000	600	925	500	(1)	530
0355 18/27/29	1000	800	925	700	(1)	730
0355 91	1000	1000	925	400 x 2	(1)	430
0355 90	1000	1200	925	500 x 2	(1)	530
0355 92/96	1200	800	1125	700	(1)	730
0355 93	1200	1000	1125	400 x 2	(1)	430
0355 94/97	1200	1200	1125	500 x 2	(1)	530
0355 98	1400	800	1325	700	(1)	730
0355 95	1400	1000	1325	400 x 2	(1)	430

(1) Central lock (2) Top or bottom lock (3) Without upright sections

Gland plates

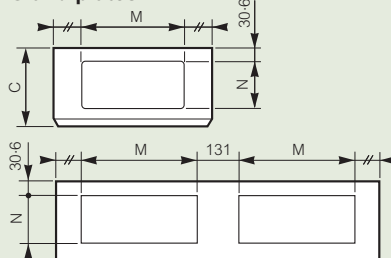


Metal thickness	
Door	≤ 600mm H = 1.3mm 700mm H = 1.5mm ≥ 800mm H = 1.8mm
Sides	all 1.3mm
Back	≤ 600x400mm = 0.8mm ≥ 600x600mm = 1.3mm


Enclosures		External depth without lock C (mm)	Usable space for glands		No. of gland plates
Width (mm)	Depth (mm)		M (mm)	N (mm)	
200	160	170	—	—	—
300	150	160	—	—	—
300	200	210	169	115	1
400	200	210	269	115	1
400	250	260	269	115	1
500	250	260	369	150	1
500	300	310	369	150	1
600	250	260	469	150	1
600	300	310	469	150	1
600	400	410	469	150	1
800	250	260	469	150	1
800	300	310	469	150	1
800	400	410	469	150	1
1000	250	260	369	150	2
1000	300	310	369	150	2
1200	300	310	469	150	2
1200	400	410	469	150	2

■ Dimensions (continued)


Wall bracket fixing positions

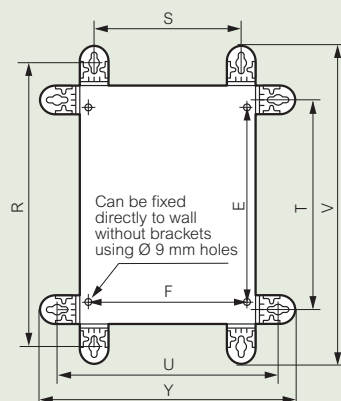

Cat. No. 0364 01



Cat. No. 0364 04





Enclosures		Vertical wall brackets		Fixing centres	Horizontal wall brackets		Fixing centres	Overall dimensions			
Height (mm)	Width (mm)							0364 01		0364 04	
		R (mm)	S*(mm)	E (mm)	T*(mm)	U (mm)	F (mm)	V (mm)	Y (mm)	V (mm)	Y (mm)
300	200	375	150	225	250	275	169	430	330	402	302
300	300	375	250	225	250	375	269	430	430	402	402
300	400	375	350	225	250	475	369	430	530	402	502
400	300	475	250	325	350	375	269	530	430	502	402
400	400	475	350	325	350	475	369	530	530	502	502
400	600	475	550	325	350	675	569	530	730	502	702
500	400	575	350	425	450	475	369	630	530	602	502
500	500	575	450	425	450	575	469	630	630	602	602
600	400	675	350	525	550	475	369	730	530	702	502
600	600	675	550	525	550	675	569	730	730	702	702
600	800	675	750	525	550	875	769	730	930	702	902
600	1000	675	950	525	550	1075	969	730	1130	702	1102
700	500	775	450	625	650	575	469	830	630	802	602
800	600	875	550	725	750	675	569	930	730	902	702
800	800	875	750	725	750	875	769	930	930	902	902
800	1000	875	950	725	750	1075	969	930	1130	902	1102
1000	600	1075	550	925	950	675	569	1130	730	1102	702
1000	800	1075	750	925	950	875	769	1130	930	1102	902
1000	1000	1075	950	925	950	1075	969	1130	1130	1102	1102
1000	1200	1075	1150	925	950	1275	1169	1130	1330	1102	1302
1200	800	1275	750	1125	1150	875	769	1330	930	1302	1102
1200	1000	1275	950	1125	1150	1075	969	1330	1130	1302	1302
1200	1200	1275	1150	1125	1150	1275	1169	1330	1330	1302	1302
1400	800	1475	750	1325	1350	875	769	1530	930	1502	902
1400	1000	1275	1150	1325	1350	1075	969	1530	1130	1502	1102


* Same for Cat. No. 0364 01 and 0364 04

Active corner

Provides quick and easy fixing
Transfers equipment weight to wall fixings




Fixing method for runners and depth adjustment brackets (p. 393)




Adjustment of equipment

Without runners



With runners fitted
(optional)



Enclosure Depth (mm)	Without runners	
	W (mm)	X (mm)
160	140	125
200	180	165
250	230	215
300	280	265
400	380	365

Enclosure Depth (mm)	With runners				
	Runner Cat. Nos.	W (mm) min.	max.	X (mm) min.	max.
160	-	-	-	-	-
200	-	-	-	-	-
250	0367 43	93	213	78	198
300	0367 44	93	263	78	248
400	0367 45	93	363	78	348

Important

Legrand steel enclosures are supplied with a polyester finish. The finish will provide good protection against corrosion under normal conditions. If the enclosures are to be installed in wet or corrosive conditions we recommend that a regular programme of inspection and maintenance is carried out.

If service conditions are adverse we recommend that the enclosures are given extra surface protection at the time of installation. Legrand will be pleased to advise on appropriate extra protective means to be taken.

For general external use and in particularly severe corrosive conditions we recommend the use of our Marina range of glass reinforced polyester enclosures.

IP 55 does not necessarily mean that the steel enclosure can be used outdoors. Please consult the relevant standard.

Marina wall mounting enclosures

polyester IP 66 - IK 10



0362 63 + plinth 0362 92
+ roof 0362 95



0362 55 + wall brackets 0364 09



0364 09



0362 44



0.362 42

Enclosure Cat. No. 0362 61 fitted with :
0364 09 brackets,
0363 63 internal door,
0368 26 key barrels,
0362 44 coupling kit and
0362 42 depth adjustment kit



Technical information and dimensions (p. 399)

IP 66 according to IEC EN 60529. IK 10 according to IEC EN 62262 (EN 50102). UL/CSA approval applied for. Class III⁽¹⁾
Glass fibre reinforced polyester (GRP) enclosures. Self extinguishing at 960 °C according to IEC EN 60695-2-11. Designed for corrosive environments
Reversible door, 180° opening (except Cat. No. 0362 50). Double bar lock(s), captive stainless steel hinge pins
Mounting plate/equipment can be fixed directly to the rear of the enclosure
Accepts partial plate from 500 x 400 x 200 mm and/or rails (except Cat. No. 0362 50)
Optional depth adjustment kit Cat. No. 0362 42 available for enclosures 400 mm high and above

Pack	Cat. Nos.	Wall mounting grey RAL 7035	
		Ext. dimensions (mm) H x W x D	Corresponding Atlantic (mm) H x W x D
1	0362 50	300 x 220 x 160	300 x 200 x 160
1	0362 51	400 x 300 x 206	400 x 300 x 200
1	0362 52	500 x 400 x 206	500 x 400 x 200
1	0362 55	610 x 400 x 257	600 x 400 x 250
1	0362 56	720 x 510 x 250	700 x 500 x 250
1	0362 61	820 x 610 x 300	800 x 600 x 300
1	0362 63	1 020 x 810 x 300	1 000 x 800 x 300
1	0362 64	1 220 x 810 x 300	1 200 x 800 x 300

		Wall mounting grey RAL 7035 with tinted tempered glass window	
		Ext. dimensions (mm) H x W x D	Window (mm) H x W
1	0362 71	400 x 300 x 206	235 x 145
1	0362 72	500 x 400 x 206	335 X 245
1	0362 75	610 x 400 x 257	463 x 245
1	0362 76	720 x 510 x 250	570 x 272
1	0362 81	820 x 610 x 300	672 x 372
1	0362 83	1 020 x 810 x 300	770 x 495
1	0362 84	1 220 x 810 x 300	970 x 495

		Plinths grey RAL 7035
		Height 170 mm
		Front and rear access plates
		Plinths can be stacked for extra height (2 max.)
		For enclosures
		W x D (mm)
1	0362 91	600 x 300
1	0362 92	800 x 300

		Roofs grey RAL 7035
		IK 10
		For enclosures W x D (mm)
1	0362 93	500 x 250
1	0362 94	600 x 300
1	0362 95	800 x 300

Pack	Cat. Nos.	Accessories								
		Set of 4 polyester wall mounting brackets, supplied complete with bolts								
		<table><tr><th>For enclosures</th><th></th></tr><tr><th>H (mm)</th><th>Max. load. (kg)</th></tr><tr><td>300</td><td>100</td></tr><tr><td>400 to 1200</td><td>150</td></tr></table>	For enclosures		H (mm)	Max. load. (kg)	300	100	400 to 1200	150
For enclosures										
H (mm)	Max. load. (kg)									
300	100									
400 to 1200	150									
1	0364 08									
1	0364 09									
10	0362 40	Metal inserts for M8 rear fixing For enclosure height ≥ 400 mm (anchors into blind holes provided in enclosure rear)								
1	0362 42	Depth adjust kit for enclosures ≥ 200 mm 4 fixings complete with screws								
1	0362 44	Coupling kit (horizontal or vertical) for enclosure heights ≥ 500 mm Kit ensures maintained IP 66 rating. Multiple kits can be used to join multiple enclosures (For wall mounting, wall brackets Cat. No. 0364 09 must be ordered separately)								
1	0365 13	Stainless steel padlock bracket for enclosure heights ≥ 400 mm 20 x 7 mm cutout accepts up to 3 6 mm padlocks								



**Anti-graffiti versions
available to special order**


Contact us on 0845 605 4333

(1) Permits the final assembly to have Class II insulation according to FN 60439-1

Marina wall mounting enclosures

polyester - IP 66 - IK 10

■ Dimensions and weights, usable areas

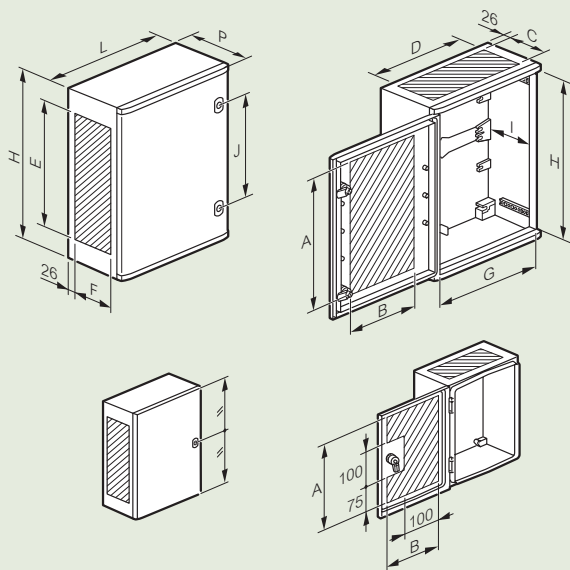


Cat. Nos.	Usable dimensions (mm)									
	A ⁽¹⁾	B ⁽¹⁾	C	D	E	F	G	H	I max.	J
0362 50	250	150	105	195	250	115	194	280	130	-
0362 51/71	300	180	130	250	260	150	260	350	178	200
0362 52/72	400	280	130	350	360	150	360	450	178	300
0362 53/55/75	500	280	180	350	460	180	360	560	225	400
0362 34/56/76	600	340	170	400	560	170	460	662	211	400
0362 35/61/81	700	440	220	500	660	230	560	762	261	500
0362 36/63/83	900	600	220	700	860	230	760	962	261	580
0362 37/64/84	1 100	600	220	700	1 060	230	960	1 162	261	700

(1) Except for enclosures with glass windows


■ Equipment fixing

Cat. Nos.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
0362 50	263	163	-	-	-	-
0362 51/71	325	225	125	225	102-5	228-5
0362 52/72	425	325	225	325	87-5	228-5
0362 33/55/75	525	325	325	325	95	328-5
0362 34/56/76	625	425	425	425	100	428-5
0362 35/61/81	725	525	525	525	100	528-5
0362 36/63/83	925	725	725	725	100	728-5
0362 37/64/84	1125	725	925	725	100	728-5



■ Adjustment of equipment (kit required)


Cat. Nos.	Full mounting plate (mm)		Chassis with rail └ (mm)	
	A max	A min (with Cat. No. 0362 42)	B max	B min (with Cat. No. 0362 42)
0362 50	135	-	-	-
0362 51/71	170	70	155	55
0362 52/72	170	70	155	55
0362 33/55/75	220	70	205	55
0362 34/56/76	220	70	205	55
0362 35/61/81	270	70	255	55
0362 36/63/83	270	70	255	55
0362 37/64/84	270	70	255	55




■ Wall mounting brackets

Cat. No. 0364 09

Cat. No. 0364 08

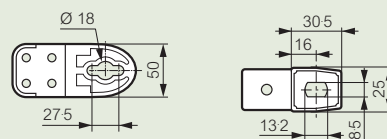


■ Fixing positions

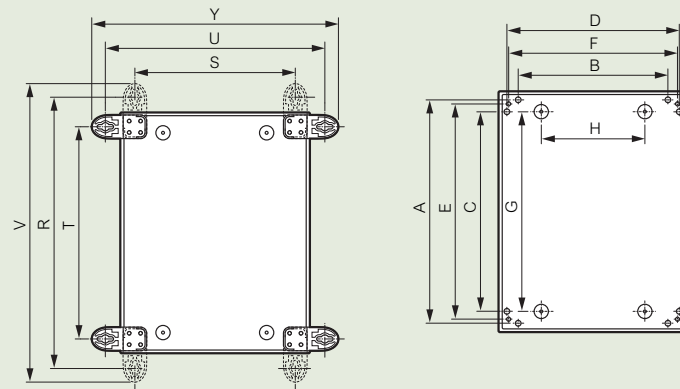

Cat. Nos.	Direct fixing outside mounting plate area (mm)		Direct fixing through rear of enclosure (mm)		With vertical brackets (mm)			With horizontal brackets (mm)		
	E	F	G	H	R	S	V	T	U	Y
0362 50⁽¹⁾	-	-	220	150	330	190	359	270	250	279
0362 51/71	358	259	325	120	470	241	525	341	370	425
0362 52/72	458	359	425	220	570	341	625	441	470	525
0362 33/55/75	558	358	525	220	680	341	735	551	470	525
0362 34/56/76	664	468	600	200	789	441	844	641	579	634
0362 35/61/81	764	568	700	300	887	548	942	758	677	732
0362 36/63/83	864	768	900	500	1087	748	1142	958	877	932
0362 37/64/84	1164	768	1100	500	1287	748	1342	1158	877	932

(1) Use Cat. No. 0364 08 wall brackets. Others use Cat. No. 0364 09 wall brackets

■ Plinths and roofs

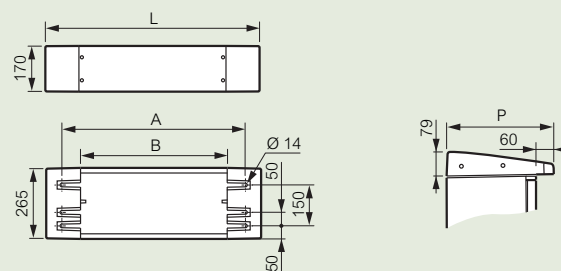


Plinth Cat. Nos.	Width (mm)	A (mm)	B (mm)	Weight (kg)
0362 91	590	480	344	4.8
0362 92	790	680	544	5.4

Roof Cat. Nos.	Width (mm)	D (mm)	Weight (kg)
0362 93	510	310	1
0362 94	612	360	1.3
0362 95	812	360	1.7

■ Coupling kit for wall mounting enclosures


Cat. No. 0362 44 (Brackets Cat. No. 0364 09 not included)

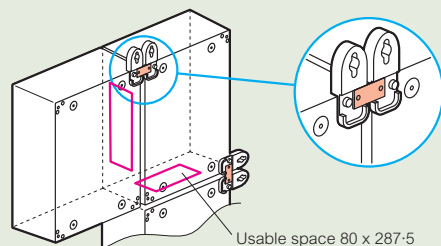


equipment for wall mounting enclosures



0360 55



0360 22 with rail



0360 18



0363 60 internal door
with Atlantic steel enclosure
0355 03 + kit 0363 69






0361 03 mounted in
enclosure 0354 94



Technical information and dimensions (p. 403)

Pack	Cat. Nos.		Mounting plates		
			Plain and Lina 12·5 perforated		
			Pre-galvanised steel		
			Plain : 2 mm thick up to 400 x 400		
			3 mm thick from 400 x 600		
			Lina 12·5 : 2 mm thick		
			Ø 6·5 mm for rivets Cat. No. 0366 44		
			Ø 3·3 mm for equipment screws Cat. No. 0347 45 (see p. 402)		
	Plain	Lina 12·5	For enclosure dimensions Height x Width (mm)	Plain plate weight (kg)	Lina 12·5 weight (kg)
1	0360 49 ⁽¹⁾	0360 01 ⁽¹⁾	300 x 220	0·9	0·47
1	0360 69	0360 02	300 x 300	1	0·6
1	0360 52 ⁽²⁾	0360 04 ⁽³⁾	300 x 400	1·3	0·8
1	0360 52 ⁽²⁾	0360 04 ⁽³⁾	400 x 300	1·3	0·8
1	0360 70	0360 05	400 x 400	1·7	1·1
1	0360 56 ⁽²⁾	0360 22 ⁽³⁾	400 x 600	3·3	2·2
1	0360 55	0360 09	500 x 400	2·7	1·5
1	0360 71	0360 14	500 x 500	3·5	1·85
1	0360 56 ⁽²⁾	0360 22 ⁽³⁾	600 x 400	3·3	2·2
1	0360 57	0360 24	600 x 600	6·2	3·7
1	0360 59 ⁽²⁾	0360 33 ⁽³⁾	600 x 800	8·4	5·2
1	0360 54 ⁽²⁾	0360 40	600 x 1 000	10·6	6·8
1	0360 58	0360 31	700 x 500	6	3·7
1	0360 59 ⁽²⁾	0360 33 ⁽³⁾	800 x 600	8·4	5·2
1	0360 60	0360 34	800 x 800	11·4	7
1	0360 61 ⁽²⁾	0360 42 ⁽³⁾	800 x 1 000	14·4	9·2
1	0360 54 ⁽²⁾	0360 40	1 000 x 600	10·6	6·8
1	0360 61 ⁽²⁾	0360 42 ⁽³⁾	1 000 x 800	14·4	9·2
1	0360 63	0360 43	1 000 x 1 000	20·5	11·5
1	0360 65 ⁽²⁾	0360 47 ⁽³⁾	1 000 x 1 200	23	13·9
1	0360 64		1 200 x 800	18·5	
1	0360 65 ⁽²⁾	0360 47 ⁽³⁾	1 200 x 1 000	23	13·9
1	0360 66		1 200 x 1 200	34·4	
1	0360 67 ⁽³⁾		1 400 x 800	26·4	
1	0360 68		1 400 x 1 000	32·2	
			Fixing accessories are supplied in each enclosure		
			Lina 25 perforated		
			Zinc plated sheet metal		
			1·5 mm thick up to 600 x 400		
			2 mm thick from 600 x 600		
			Accepts clip nut fixings (see p. 402)		
			For enclosure dimensions Height x Width (mm)	Weight (kg)	
1	0360 12		400 x 300	0·6	
1	0360 15		500 x 400	0·9	
1	0360 16		600 x 400	1·3	
1	0360 17		600 x 600	2·1	
1	0360 18		700 x 500	2	
1	0360 19		800 x 600	3·1	
1	0360 21		1 000 x 800	4·9	
1	0360 25		1 000 x 1 000	6·8	
			Fixing accessories are supplied in each enclosure		

Pack	Cat. Nos.	Internal doors grey RAL 7035 - IP xxB		
		Fit Marina and Atlantic stainless steel enclosures. Also suitable for Atlantic steel enclosures when used with mounting kit Cat. No. 0363 69 For mounting of control and signalling units Reversible, easy to fix, robust 4 mm thick GRP construction		
		For enclosures (mm) H x W	Dim. (mm) H x W	Usable area (mm) H x W
1	0363 59	400 x 300	341 x 236	305 x 185
1	0363 60	500 x 400	441 x 336	405 x 250
1	0363 61	600 x 400	541 x 336	505 x 250
1	0363 62	700 x 500	642 x 436	500 x 340
1	0363 63	800 x 600	742 x 536	600 x 440
1	0363 64	1 000 x 800	942 x 736	800 x 640
1	0363 65	1 200 x 800	942 x 736	800 x 640
1	0363 69	Mounting kit for Atlantic steel enclosures		


		Insulated modular chassis grey RAL 7035	
		Separate ABS front plate per row Supplied in kit form with metal uprights and crosspieces Grey RAL 7035 front plate Symmetrical rails  depth 15 mm Fixings supplied with enclosure For enclosure dimensions Height x Width x Depth (mm)	
1	0361 01	400 x 300 x 200 30 modules (3 rows of 10) Supplied with 1 blanking plate	
1	0361 02	500 x 400 x 200 48 modules (3 rows of 16) Supplied with 1 blanking plate	
1	0361 03	600 x 400 x 250 48 modules (3 rows of 16) Supplied with 1 blanking plate	
1	0361 05	700 x 500 x 250 84 modules (4 rows of 21) Supplied with 1 blanking plate	
1	0361 06	800 x 600 x 300 108 modules (4 rows of 27) Supplied with 2 blanking plates	
1	0361 09	1 000 x 800 x 300 190 modules (5 rows of 38) Supplied with 2 blanking plates	

10	0361 00	Blanking plate for windows For enclosures up to 800 mm wide Blanking plate to suit up to 670 x 45 mm window To be cut to required length
----	---------	--

- (1) Marina only
- (2) From mid 2007 the same plate is used for both vertical and horizontal enclosures
- (3) For Atlantic steel and Atlantic stainless steel enclosures



Uprights + crosspieces (subject to size)
Pocket Cat. No. 0365 80



0365 81



0367 80



0363 81



0364 40



0.366 44



0347 45





0347 50

Pack	Cat. Nos.	Lina 25 sectioned uprights			
		Set of 2 sectioned uprights			
		For enclosures height (mm)	Length of uprights (mm)	Thickness (mm)	Profile
5	036150 ⁽¹⁾	300	237	2·5	L
5	036151	400	337	2·5	
5	036152	500	437	2·5	
5	036153	600	537	2·5	
5	036154	700	637	2·5	
5	036155	800	737	2·5	
5	036156	1 000	937	2·5	
1	036158	1 200	1 137	2·5	L
1	036159 ⁽¹⁾	1 400	1 337	2·5	

		Crosspieces	
		Crosspieces ready to assemble (excluding fixings)	
		For enclosures width (mm)	Crosspiece length (mm)
10	0367 80	300	243
10	0367 81	400	343
10	0367 82	500	443
10	0367 83	600	543
10	0367 84	800	743
10	0367 85	1 000	943
10	0367 86	1 200	1 143


		Rail 2 m length	
10	0374 02 		
10	0374 07 		



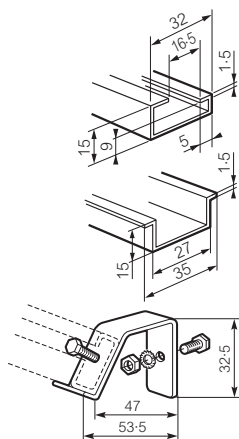


10	0394 49	Mounting bracket for rail fixing at 45° 2 brackets with four 6 mm dia. bolts, nuts and washers	
----	---------	--	--

		RAL 7035		
		External dimensions (mm) Width x Height	Internal dimensions (mm) Width x Height x Depth	
20	0365 80	340 x 235	310 x 200 x 18	
20	0365 81	260 x 165	230 x 130 x 18	




Pack	Cat. Nos.	Hinged instrument windows		
		IP 54 - IK 05 Anodised aluminium frame 4 mm thick acrylic window Neoprene gasket Lock with key No. 455 Supplied complete with fitting template Prevents unauthorised access to door mounting control devices		
		External dimensions (mm) Height x Width x Depth	Window dimensions (mm) Height x Width	Usable depth (mm)
1	0363 81	297 x 397 x 50	250 x 350	45
1	0363 82	397 x 497 x 50	350 x 450	45




Cat. Nos.	A (mm)	B (mm)	C (mm)	D (mm)
0363 81	297	397	250	350
0363 82	397	497	350	450

		Fixings
		Clip nuts for perforated plates Supplied without screws For M4 screw For M6 screw
100 100	0364 40 0364 42	
		On to rails EN 60715  
100	0364 78	For M4 mm screw
		On to rail EN 60715 
10	0044 16	Claw width 10 mm Threaded hole For M4 screw
10	0044 17	Claw width 17.5 mm Smooth hole Ø 3.8 mm Supplied with fixing screw Ø 3.5 mm Length 13 mm
40	0364 69	Fixomega for M4 screw
		Set of brackets to fix rail to door uprights 
5	0367 35	Supplied with M6 screws Provides a fixing for 15 mm deep  rail when used on the door uprights




For Lina 12-5 perforated plates		
500	0366 44	Insulated plastic rivets Ø 6 mm for 6 mm holes
100	0347 45	Self piercing-tapping hex head screws 4-8 x 16 mm for Ø 3-3 mm holes
200	0347 50	Plastic insulating cap for above




equipment for wall mounting enclosures

■ Mounting plates


Pre-galvanised plain and Lina 12·5 plates

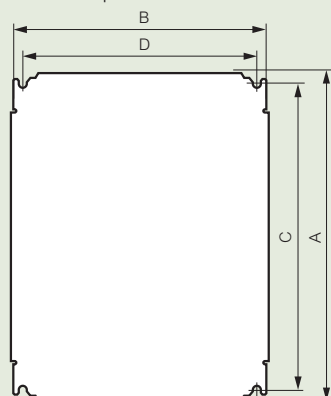

Lina 25 perforations

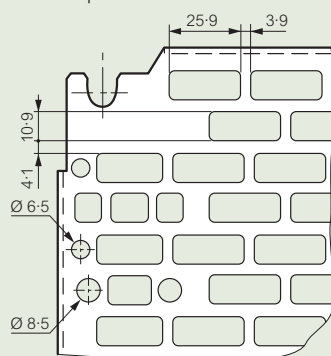


■ Crosspieces/rails

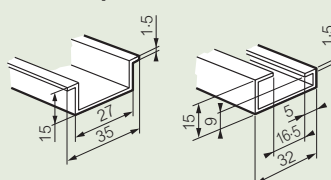


See p. 402 for crosspieces/rails

■ Chassis assembled

Uprights and crosspieces

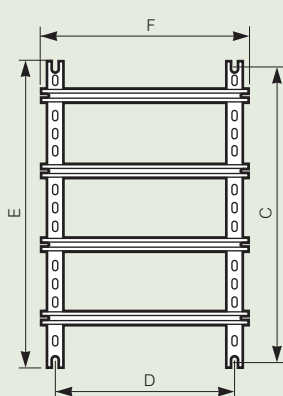

■ Sectioned uprights

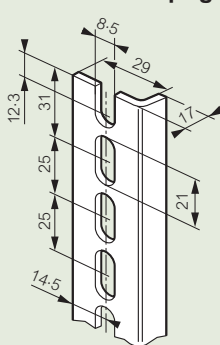

■ Clip nuts



See p. 402 for clip nuts

■ Insulated modular chassis

Fixes to corner fixings inside enclosure
Chassis can fit steel or polyester enclosures



0361 03 fitted into 0354 94

■ Space between door and chassis front

- Atlantic steel
- Atlantic stainless steel
- Marina

Depth 200 : 70 mm
Depth 250 : 80 mm
Depth 300 : 90 mm

The front sections can only be removed using a tool (flat blade screwdriver)

Glow wire tested : 5s at 750 °C

Enclosure dimensions Height x Width (mm)	Mounting plate dimensions		Usable space for equipment (dm ²)	Plate/Chassis fixing points		Height of upright E (mm)	Length of crosspiece F (mm)
	A (mm)	B (mm)		C (mm)	D (mm)		
300 x 200	256	156	4·2	225	125	—	—
300 x 220	275	192	5·3	263	163	—	—
300 x 300	256	256	6·2	225	225	237	243
300 x 400	256	356	8·2	225	325	237	343
400 x 300	356	256	8·2	325	225	337	243
400 x 400	356	356	11·7	325	325	337	343
400 x 600	356	556	18·7	325	525	337	543
500 x 400	456	356	15·2	425	325	437	343
500 x 500	456	456	19·2	425	425	437	443
600 x 400	556	356	18·7	525	325	537	343
600 x 600	556	556	29·7	525	525	537	543
600 x 800	556	756	40·7	525	725	—	—
600 x 1000	556	956	51·7	525	925	—	—
700 x 500	656	456	28·7	625	425	637	443
800 x 600	756	556	40·7	725	525	737	543
800 x 800	756	756	55·7	725	725	737	743
800 x 1000	756	956	71·7	725	925	737	943
1000 x 600	956	556	51·7	925	525	937	543
1000 x 800	956	756	70·7	925	725	937	743
1000 x 1000	956	956	89·7	925	925	937	943
1000 x 1200	956	1156	108·7	925	1125	—	—
1200 x 800	1156	756	85·7	1125	725	1137	743
1200 x 1000	1156	956	108·7	1125	925	1137	943
1200 x 1200	1156	1156	131·7	1125	1125	1137	1143
1400 x 800	1356	756	100·7	1325	725	1337	743
1400 x 1000	1356	956	127·7	1325	925	1337	943

Pack	Cat. Nos.	Lock housings and cams for rebate or cylinder locks
		Interchangeable for Atlantic and Marina enclosures
10	0368 04	Plastic housing (excludes barrel and cam) 
10	0368 05	Handle With blank (excludes cam) 
10	0368 06	Handle Fitted with locking barrel 2433 A (excludes cam) 
		Locking cams
10	0368 43	For Atlantic 1 door enclosures
10	0368 44	For Atlantic 2 door enclosures
10	0365 30	For Marina enclosures
		Note : Cam nuts are supplied with the handle or housing 
		Metal lock barrels
10	0368 16	8 mm male square 
10	0368 17	6.5 mm male triangle
10	0368 18	8 mm male triangle
10	0368 19	11 mm male triangle 
10	0368 20	Double bar 
		Key barrels
		Supplied with set of 2 keys For key No :
10	0368 22	405
10	0368 23	421
10	0368 24	455
10	0368 25	1242 E
10	0368 26	2433 A
10	0368 27	3113 A
10	0365 45	Set of two 2433 A keys 
		Keys for metal barrels
10	0365 39	For 6.5 mm male triangle lock
10	0365 40	For 8 mm male triangle lock
10	0365 41	For 11 mm male triangle lock 
10	0365 42	Double bar 
		Other accessories
		Padlock adaptor
1	0365 11	Metal painted black-grey RAL 7021 Fits over door handles to provide security Accepts up to 3 padlocks 
1	0365 13	Stainless steel padlock bracket for Marina enclosure heights ≥ 400 mm 20 x 7 mm cutout accepts up to 3 6 mm padlocks 

locking accessories
universal locking system

■ Universal locking system⁽¹⁾

The locks can be assembled and fitted to all Atlantic and Marina enclosures

Lock barrels

8 mm square
male
Cat. No. 0368 16

6.5 mm triangle
male
Cat. No. 0368 17

8 mm male
triangle
Cat. No. 0368 18

11 mm male
triangle
Cat. No. 0368 19

Double bar
Cat. No. 0368 20

Key barrels

No. 405
Cat. No. 0368 22

No. 421
Cat. No. 0368 23

No. 455
Cat. No. 0368 24

1242 E
Cat. No. 0368 25

2433 A
Cat. No. 0368 26



3113 A
Cat. No. 0368 27

Dimensions of special triangle locks

6.5 mm male
CNOMO

8 mm male

11 mm male



(1) The metal locks (special barrels and key barrels) and lock barrels are all compatible with each other



Ventilation fan kit with metal grill



Natural ventilation

Ventilation fan kits with plastic grill

Spacers for vent kits

Heating

Resistance heaters 110 V/240 V ~ =


IP 20
Prevent condensation forming inside the enclosure
"PTC" auto-regulated and surface temperature
limited: $t = 70^{\circ}\text{C}$
Heat dissipator in black aluminium oxide
Fix on rail 

Power	Current rating
20 W	0.8 A
60 W	1.5 A
120 W	3.2 A

Thermostat

12 to 250 V~ (requires neutral)
Contact rating : 10 A max. (5 A closing)
Fix on rail 
Adjustable from 5 to 60 °C with NO/NC contact


■ Operating principle

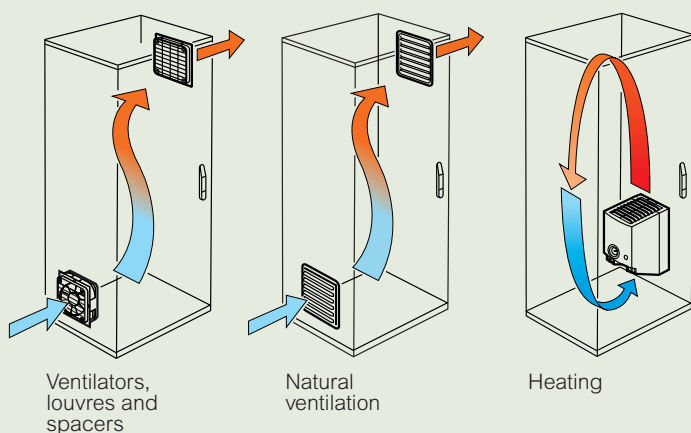


■ Ventilation fan kits, louvres and spacers

Dimensions and cut-outs

Cat. No. 0348 17

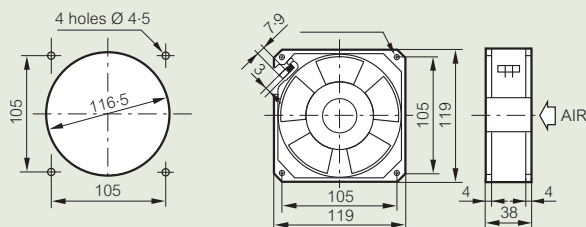

Cat. Nos. 0348 50/51/52/34/35/36

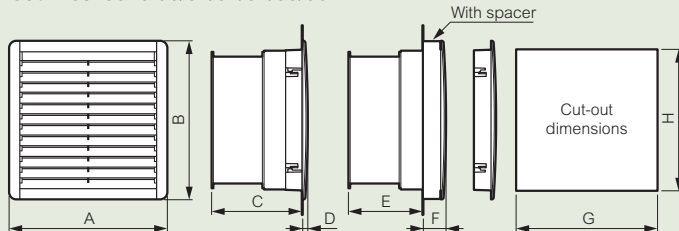

Cat. Nos.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
0348 50	150	150	70	7	43	34	125	125
0348 51	250	250	105	8	78	35	223	223
0348 52	250	250	123	8	96	35	223	223
0348 34	150	150	-	7		34	125	125
0348 35	250	250	-	8		35	223	223
0348 36	325	325	-	10		37	291	291


Technical characteristics

Cat. Nos.	0365 71/0348 17	0348 50	0348 51	0348 52
Voltage (V)/phase	220-240/1	230/1	230/1	220-240/1
Frequency (Hz)	50/60	50/60	50/60	50/60
No load flow ventilation only (m³/h)	160	160	160	240
On load flow - with an output louvre (supplied)	30	40	100	170
Static pressure (mm of water)	100	66	51	111
Power down (W)	22	20	20	29
Current drawn (A)	0-14	0-125	0-125	0-426
Operating temperature	-10 °C/+50 °C			
IP/IK	32/10	54/08	54/08	54/08
Sound level (dB)	49	43	43	50
Weight (kg)	0-72	0-8	1-4	1-7


■ Natural ventilation

Dimensions and cut-outs


Cat. No. 0348 04




Cat. No. 0348 05



Cat. No. 0365 78




Cat. No. 0365 79



■ Heating

Dimensions

Cat. Nos. 0348 00/01/02




Cat. Nos.	Rating	H (mm)
0348 00	20 W	80
0348 01	60 W	140
0348 02	120 W	220

Vertical installation at the bottom of the enclosure
Air circulation :


- ensure clearance >50 mm all round the device
- do not cover

Cat. No. 0348 47



The box of tricks

Moulded from a selection of environmentally friendly materials, Plexo boxes provide a variety of solutions to meet your protection needs... IP 55 or IP 66, IK 07 or IK 08. Available with transparent or plain covers and with hinges or cover fixings, most Plexo boxes accept IP 2X terminals, DIN rail and mounting plates.

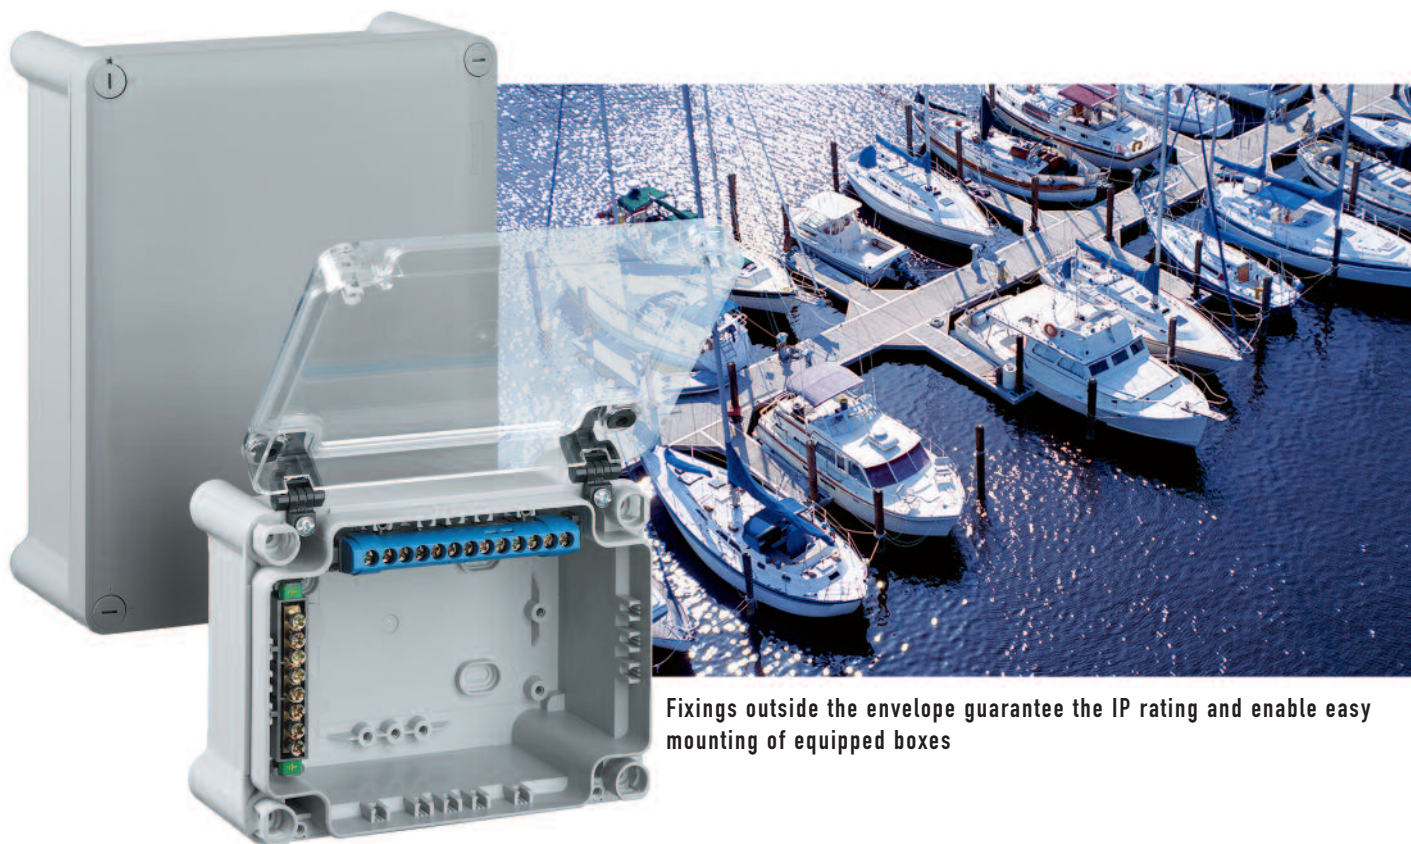


Fixings outside the envelope guarantee the IP rating and enable easy mounting of equipped boxes

DESIGNED WITH FLEXIBILITY IN MIND

**Can be equipped
with a plain plate
or rail for fixing
components and
equipment**




Optional wall mounting brackets enable horizontal or vertical mounting

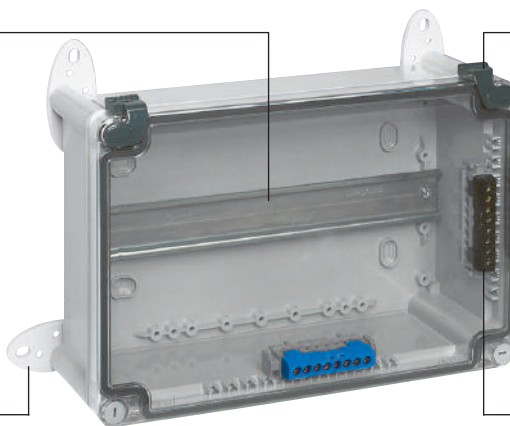

**Optional UV
resistant hinges
can be easily fitted
to the standard box**



IP 2X terminals can be accommodated on boxes from 130 x 130 mm using the unique side mounting provided



industrial boxes


DIMENSIONS	INDUSTRIAL BOXES						ACCESSORIES	
Internal dimensions (mm) Height x Width x Depth	Cable entries 	IP 55 plain clip-on covers 	IP 55 covers  Plain Transparent		IP 55 plain hinged covers - 2 x 1/4 turn fixings 	IP 66 plain covers 	Mounting plates 	Hinge kit accessories 
	Ø 60 x 40	membrane	0921 00					
	Ø 70 x 45	membrane	0921 01					
	65 x 65 x 40	membrane	0921 04					
	80 x 80 x 45	none	0921 28					
	80 x 80 x 45	membrane	0921 26					
	105 x 105 x 55	membrane		0921 36				
	105 x 105 x 55	none		0921 38				
	130 x 75 x 74	none		0359 00	0359 01		0350 07	
	130 x 130 x 74	membrane		0920 32				0358 10
130 x 130 x 74	none		0359 30	0359 31		0350 13	0358 10	
155 x 110 x 74	membrane		0920 42				0358 11	
155 x 110 x 74	none		0359 40	0359 41		0350 17	0358 11	
180 x 140 x 86	none		0359 50	0359 51		0350 22	0358 12	
220 x 170 x 86	none		0359 60	0359 61		0350 28	0358 13	
220 x 170 x 140	none				0921 22 ⁽²⁾		0350 90	
265 x 174 x 154	none				0350 43 ⁽²⁾		0350 92	
270 x 170 x 86	none		0359 70	0359 71		0350 33	0358 14	
310 x 240 x 124	none		0359 80	0359 81		0350 44	0358 15	
310 x 240 x 160	none		0922 84 ⁽¹⁾		0922 84 ⁽²⁾ 0350 54 ⁽²⁾			
359 x 265 x 154	none				0350 58 ⁽²⁾		0350 94	
360 x 270 x 124	none		0359 90	0359 91		0350 47	0358 16	

(1) Old model : four 1/4 turn cover fixings

(2) Old model : two 1/4 turn cover fixings

industrial boxes

PS range

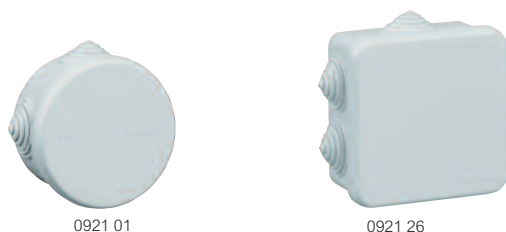

0921 01

0921 26



0921 36

IP 55 - IK 07
Grey RAL 7035
Conform to EN 60695-2-1
Material : polystyrene box and polypropylene cover - halogen free
Temperature rating : -25 °C to +40 °C
Self-extinguishing 650 °C
Membrane glands
Complete dimensions available on request
Opaque cover

Pack	Cat. Nos.	Weatherproof round boxes
		With fixing slots for easy alignment Use 5 mm Ø screws Clip-on cover Nominal internal dimensions : Ø x Depth
5/100	0921 00	Ø 60 mm x 40 mm 4 glands
5/100	0921 01	Ø 70 mm x 45 mm 4 glands

		Weatherproof square boxes
		With fixing slots for easy alignment Use 5 mm Ø screws Clip-on cover
		Nominal internal dimensions : Height x Width x Depth
5/100	0921 04	65 x 65 x 40 mm 7 glands
5/100	0921 26	80 x 80 x 45 mm 7 glands

Weatherproof square box class II

Mounting by :

- either internal fixing points - use 5 mm Ø screws
- or at three corners outside the wiring area

Use 4 mm Ø screws

Provision for anti-tamper seal

Cover with 4 x 1/4 turn fixings, indicated I-O, can be retained open during installation

Nominal internal dimensions :

Height x Width x Depth


105 x 105 x 55 mm

7 glands

industrial boxes
PS range


■ Boxes IP 55 - IK 07

Cat. Nos. 0921 00 and 0921 01




Cat. Nos.	Ø (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
0921 00	60	79	40	44.5	40	11
0921 01	70	86	50	49.5	45	11


Cat. No. 0921 04

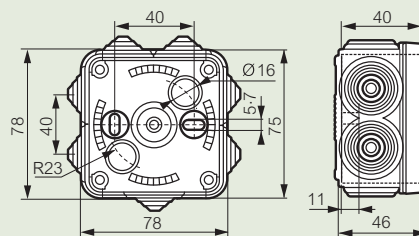

Cat. No. 0921 26

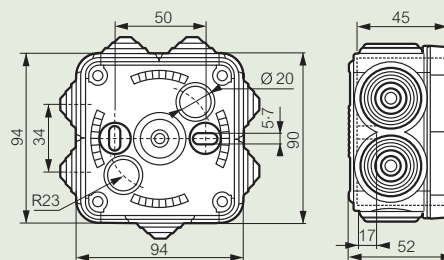


Cat. No. 0921 36

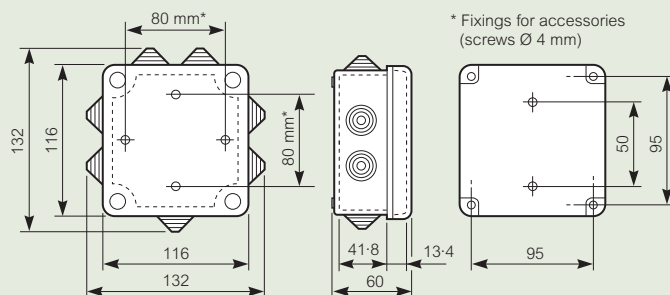


* Fixings for accessories
(screws Ø 4 mm)

■ Dimensions

Cat. No. 0921 28




Cat. No. 0921 38

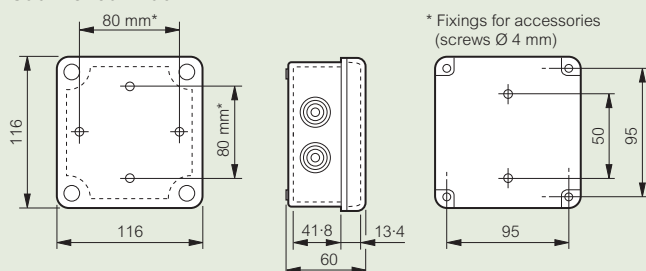

* Fixings for accessories (screws Ø 4 mm)

Boxes IP 55 – IK 07 and IP 66 – IK 08

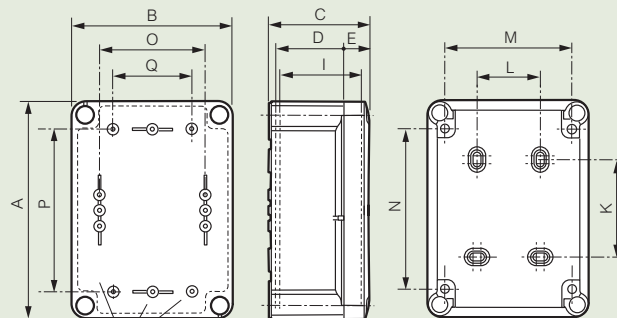


Fixings for accessories (screw Ø 4 mm)

Boxes	Dimensions (mm)					Fixing points (mm)					Fixing accessories (screw Ø 4 mm)			
Cat. Nos.	A	B	C	D	E	I	K	L	M	N	O	P	Q	
0359 00/01 0350 07 ⁽¹⁾	140	85	81	56	18	67	70	-	65	120	51	106	-	
0359 30/31 0350 13	150	150	81	56	18	67	54	70	120	103	106	106	84	
0359 40/41 0350 17	175	130	81	56	18	67	79	50	100	128	86	131	64	
0359 50/51 0350 22	200	160	94	69	18	80	104	50	130	153	116	156	94	
0359 60/61 0350 28	240	190	94	69	18	80	144	80	160	193	146	196	124	
0359 70/71 0350 33	290	190	94	69	18	80	194	80	160	243	146	246	122	
0359 80/81 0350 44	332	262	132	97	27	116	220	160	222	276	200	260	150	
0359 90/91 0350 47	382	292	132	97	27	116	270	190	252	326	230	310	150	

(1) Not suitable for direct mounting of IP 2x terminals, use with DIN rail or 12 x 2 mm metal rail (Cat. No. 0048 19 p. 440)

Cat. Nos. 0920 32 and 0920 42

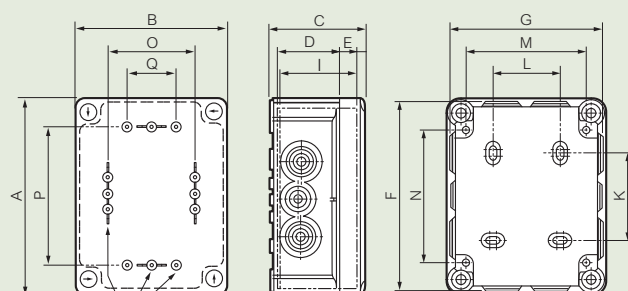

Fixings for accessories (screw Ø 4 mm)

■ Mounting plates for PS, PP and PC boxes

Cat. Nos.	A (mm)	B (mm)	C (mm)	D (mm)
0358 10	114	114	106	106
0358 11	94	139	86	131
0358 12	124	164	116	156
0358 13	154	204	146	196
0358 14	154	254	146	246
0358 15	211	271	200	260
0358 16	241	321	230	310

■ Nearest equivalent to old range

Old range			PS, PP and PC range (p. 410-411)			IP 66
Dimensions	opaque	Covers transparent	Dimensions	opaque	Covers transparent	Covers opaque
130x75x60	0350 04		130x75x74	0359 00	0359 01	0350 07
			130x130x74	0359 30	0359 31	0350 13
153x110x66	0350 20		155x110x74	0359 40	0359 41	0350 17
155x110x70	0922 50		155x110x74	0359 40	0359 41	0350 17
160x135x77	0350 31					
165x100x80	0350 06					
174x132x92	0350 26		180x140x86	0359 50	0359 51	0350 22
			180x140x86	0359 50	0359 51	0350 22
220x170x80	0921 08/0350 36	0922 73/0350 37	220x170x86	0359 60	0359 61	0350 28
220x170x140	0921 22/0350 38	0350 39				
265x174x92	0350 40	0350 41	270x170x86	0359 70	0359 71	0350 33
265x174x154	0350 43					
310x240x124	0922 80/0350 50	0350 51	310x240x124	0359 80	0359 81	0350 44
310x240x160	0922 84/0350 54					
359x265x92	0350 55	0350 57				
359x265x154	0350 58		360x270x124	0359 90	0359 91	0350 47


Note : some PVC boxes retained, see p. 413

■ IP 2x terminal acceptance⁽²⁾ chart (see p. 440)

Not suitable for direct mounting on to PVC range nor 130 x 75 x 74 mm boxes

Boxes	4 way	8 way	13 way	17 way	22 way	28 way
130 x 130 x 74	x	x				
155 x 110 x 74	x	x	x			
180 x 140 x 86	x	x	x			
220 x 170 x 86	x	x	x	x	x	
310 x 240 x 124	x	x	x	x	x	x
360 x 270 x 124	x	x	x	x	x	x

(2) Also accepts partly shrouded terminals

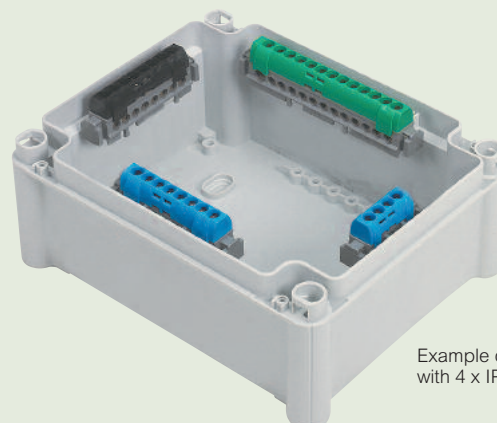

Example of box fitted with 4 x IP 2x terminals

Boxes	Dimensions (mm)							Fixing points (mm)					Fixing accessories (screw Ø 4 mm)			
Cat. Nos.	A	B	C	D	E	I	F	G	K	L	M	N	O	P	Q	
0920 32	150	150	81	56	18	67	149	149	54	70	120	103	106	106	84	
0920 42	175	130	81	56	18	67	173	128	79	50	100	128	86	131	64	

industrial boxes

PVC range



0921 22



0350 43



(+) *Dimensions (opposite)*

Grey RAL 7035

Temperature rating : - 25 °C to + 40 °C

Material : PVC

Self-extinguishing 960 °C

Undrilled with smooth sides

Complete dimensions available on request

Pack	Cat. Nos.	Weatherproof boxes IP 55
		Nominal internal dimensions : Height x Width x Depth (mm)
		Depth 140 mm
		IK 07
2	0921 22	220 x 170 x 140 - 4 x 1/4 turn cover fixings
		Depth 154 mm
		IK 08
2	0350 43	265 x 174 x 154 - 2 x 1/4 turn cover fixings + hinges
1	0350 58	359 x 265 x 154 - 2 x 1/4 turn cover fixings + hinges
		Depth 160 mm
		IK 08
1	0350 54	310 x 240 x 160 - 2 x 1/4 turn cover fixings + hinges
1	0922 84	310 x 240 x 160 - 4 x 1/4 turn cover fixings

Accessories

Metal mounting plates

Galvanised steel - 1.5 mm thick
For PVC box size :

5	0350 90	220 x 170 mm
5	0350 92	265 x 174 mm
5	0350 93	310 x 240 mm
5	0350 94	359 x 265 mm

Set of 4 wall lugs

For PVC box size 310 x 240 mm only


PVC boxes are not provided with side mounts for IP 2x terminals

industrial boxes


PVC range

■ Dimensions


Cat. No. 0921 22

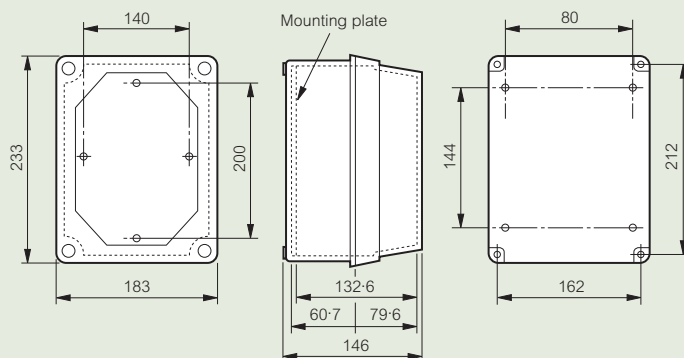

Cat. Nos. 0350 54 and 0922 84

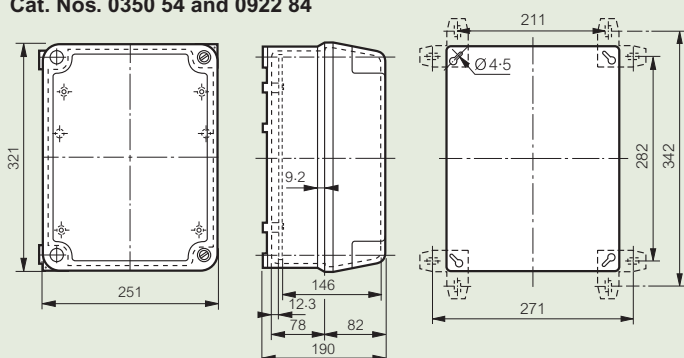

Cat. Nos. 0350 43/58

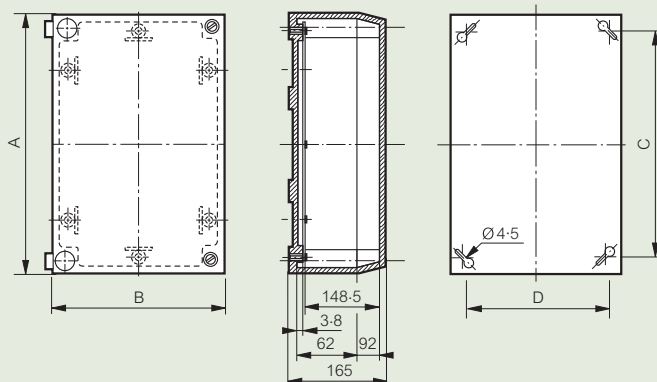

Cat. Nos.	Dimensions		Fixing points		Weight (kg)
	A (mm)	B (mm)	C (mm)	D (mm)	
0350 43	273	182	246	155	1.08
0350 58	367	273	340	246	1.80

■ Mounting plates for PVC boxes

