



SWITCH CATALOGUE

SWITCHES FROM 10A UP TO 315A

DISCONNECT SWITCHES / ROTARY CAM SWITCHES



sälzer
Innovation · Technology · Quality

Switchgear from Salzer: Solutions for the future!

Since 1956 Salzer has specialised in the development, manufacture and sale of low voltage switchgear.

The large selection of types, switching programmes and mounting forms mean that practical reliable solutions can be achieved quickly. Whatever the switch, all individual parts are optimally co-ordinated, easy to assemble and combine.

Whether in switching and automation systems, mechanical engineering and construction, in the heating, climatic and ventilation industry, environmental technology or other areas: Salzer switches provide safety!

Product support, training and service as well as a Certified Quality Management to DIN EN ISO 9001:2000 are an essential part of our daily work. Our switches comply with national and international standards (IEC / UL / CSA) and are suitable for world-wide application.

Special requirements? Call us, we'll help you find an individual solution for your switching needs.

Faster deliveries through SMD!

In order to ensure even greater flexibility for worldwide supply availability within 24h, Salzer Electric has introduced the SMD (Salzer Modular Design) system.

SMD modules are individually prefabricated and tested all-in-one modules which SMD Service holds in stock in sufficient quantities. From basic switch modules, mounting form modules and operator modules, SMD Service can assemble a complete switch requested by the customer and pack it ready for delivery in just a few actions.

Setup of Switch Catalogue

This catalogue includes a selection of our standard programmes and is divided into the following categories:

Disconnect Switches	page 4
---------------------	--------

Rotary Cam Switches	page 110
---------------------	----------

If you need assistance in the selection of a product or require additional information on the range of products available from Salzer, please feel free to contact us!

How to order

The 16 digit order code number for complete switches consists of the three ident numbers for type, switching programme and mounting form:

Type	-	Switching programme	-	Mounting form
------	---	---------------------	---	---------------

- the **type** specifies the physical size and power rating of the switches
- the **switching programme** specifies the switching arrangement and the switching angle
- the **mounting form** specifies the mountings, types of handles and optional extras

In addition to the order code number, each complete switch is assigned a machine readable 13 digit EAN Code.

Disconnect Switches

Safe **Switching** and **Disconnecting**

Disconnect Switches from Salzer are hand-operated switchgear for main circuits and are offered as ON-OFF Switches (3, 4, 6 and 8 pole) or as Changeover Switches with centre Off (3 and 4 pole).

Design and Function

- 90° switching angle
- Forced open Contacts
- Terminal screws in open position
- Finger protected (degree of protection up to IP20)
- Short-circuit rating
- Fulfils the load break requirements up to 690V or up to 1000V

Conformity

Our products are designed, manufactured and tested according to the following standards:

- IEC 60947
- EN 60947
- IEC 60204-1
- EN 60204-1
- UL 508
- CSA 22.2, No. 14

Applications

Disconnect Switches offer ideal features for their use as:

- ON-OFF Switches
- Main Switches
- Emergency-Off Switches
- Maintenance Switches
- Safety Switches
- Distribution Switches
- Motor Switches

Mounting Options



Front Mounting

- Four hole mounting
- Single hole mounting

Available as Main/Emergency-Off Switch, Main Switch, ON-OFF Switch or as a Changeover Switch.



Base Mounting

- Snap on mounting (DIN Rail 35 mm DIN EN 60715)
- Four hole mounting

Available as Main/Emergency-Off Switch, Main Switch, ON-OFF Switch or as a Changeover Switch.



Enclosed Switches

- Insulated enclosure
- Mild steel enclosure
- Stainless steel enclosure

Available as Main/Emergency-Off Switch, Main Switch, ON-OFF Switch or as a Changeover Switch.

With a broad range of mounting and operator options, Salzer can provide economical, versatile and reliable solutions!

Product lines

Product line H200		IEC:	UL/ CSA:		
■ Main/Emergency-Off Switch, Main Switch ■ ON-OFF Switch ■ Changeover Switch		20A - 63A	15A - 60A	3 ... 8 pole	switching angle 90°
		20A - 63A	15A - 60A	3 ... 8 pole	switching angle 90°
		20A - 40A	20A - 40A	3 ... 4 pole	switching angle 90°
Product line H400		IEC:	UL/ CSA:		
■ Main/Emergency-Off Switch, Main Switch ■ ON-OFF Switch ■ Changeover Switch		63A - 125A	63A - 100A	3 ... 8 pole	switching angle 90°
		63A - 125A	63A - 100A	3 ... 8 pole	switching angle 90°
		63A - 125A	63A - 100A	3 ... 4 pole	switching angle 90°
Product line K600		IEC:	UL/ CSA:		
■ Main/Emergency-Off Switch, Main Switch ■ ON-OFF Switch ■ Changeover Switch		160A	175A	3 ... 8 pole	switching angle 90°
		160A	175A	3 ... 8 pole	switching angle 90°
		160A	175A	3 ... 4 pole	switching angle 90°
Product line K800		IEC:	UL/ CSA:		
■ Main/Emergency-Off Switch, Main Switch ■ ON-OFF Switch ■ Changeover Switch		315A	240A	3 ... 8 pole	switching angle 90°
		315A	240A	3 ... 8 pole	switching angle 90°
		315A	240A	3 ... 4 pole	switching angle 90°

Table of Contents Disconnect Switches

Main/Emergency-Off Switches · Main Switches

Front mounting	Four hole mounting	36 × 36 mm	page 8
		48 × 48 mm	page 10
		68 × 68 mm	page 16
	Single hole mounting	Ø 22.5 mm	page 23
Base mounting	Snap on mounting	DIN Rail	page 28
		Door interlock with modular shaft extension	page 34
		Door interlock with metal shaft extension	page 39
	Four hole mounting	68 × 68 mm	Door interlock page 49
		104 × 104 mm	Door interlock page 52
		150 × 270 mm	Door interlock with mounting plate page 55
Enclosed switches	Insulated enclosures	100 × 80 × 65 mm	page 59
		125 × 100 × 85 mm	page 60
		175 × 115 × 100 mm	page 61
		250 × 160 × 95 mm	page 63
		320 × 220 × 180 mm	page 66
		440 × 320 × 180 mm	page 69
		440 × 320 × 255 mm	page 72
		640 × 320 × 255 mm	page 74
		640 × 320 × 330 mm	page 75
	Mild steel enclosures	150 × 150 × 120 mm	page 77
		200 × 150 × 120 mm	page 78
		300 × 250 × 150 mm	page 81
		500 × 400 × 300 mm	page 83
		600 × 400 × 300 mm	page 85
		800 × 400 × 300 mm	page 87
	Stainless steel enclosures	150 × 150 × 120 mm	page 89
		200 × 150 × 120 mm	page 90
		300 × 250 × 150 mm	page 93

ON-OFF Switches

Front mounting	Four hole mounting	36 × 36 mm	page 9
		48 × 48 mm	page 12
		68 × 68 mm	page 17
		104 × 104 mm	page 21
	Single hole mounting	Ø 22.5 mm	page 25
Base mounting	Snap on mounting	DIN Rail	page 30
	Four hole mounting	68 × 68 mm	Door interlock page 50
		104 × 104 mm	Door interlock page 53

Changeover Switches

Front mounting	Four hole mounting	48 × 48 mm	page 14
		68 × 68 mm	page 19
		104 × 104 mm	page 22
	Single hole mounting	Ø 22.5 mm	page 27
Base mounting	Snap on mounting	DIN Rail	page 32
		Door interlock with modular shaft extension	page 37
		Door interlock with metal shaft extension	page 45
	Four hole mounting	68 × 68 mm	Door interlock page 51
		104 × 104 mm	Door interlock page 54
		150 × 270 mm	Door interlock with mounting plate page 57
Enclosed switches	Insulated enclosures	250 × 160 × 95 mm	page 65
		320 × 220 × 180 mm	page 68
		440 × 320 × 180 mm	page 71
		440 × 320 × 255 mm	page 73
		640 × 320 × 330 mm	page 76
	Mild steel enclosures	200 × 150 × 120 mm	page 80
		300 × 250 × 150 mm	page 82
		500 × 400 × 300 mm	page 84
		600 × 400 × 300 mm	page 86
		800 × 400 × 300 mm	page 88
	Stainless steel enclosures	200 × 150 × 120 mm	page 92
		300 × 250 × 150 mm	page 94



Front mounting

Four hole mounting

page 8

Single hole mounting

page 23



Base mounting

Snap on mounting
(DIN Rail 35 mm DIN EN 60715)

page 28

Four hole mounting

page 49



Enclosed switches

Insulated enclosures

page 59

Mild steel enclosures

page 77

Stainless steel enclosures

page 89

Technical Information

page 95

Four hole mounting 36 × 36 mm

20A / 25A / 32A / 40A / 63A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66 (front)

Four hole mounting 36 × 36 mm



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H216 - 41400 - 033N4

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
033N4		N-padlock device yellow/red	033N1		N-padlock device black
033M4		M-padlock device yellow/red	033M1		M-padlock device black
033V4		padlockable with V-handle yellow/red	033V1		padlockable with V-handle silver/black

Dimensions in mm:

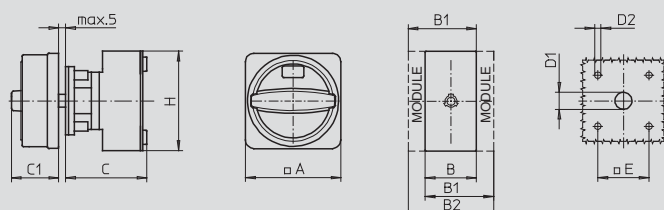

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233:										
033N4 / 033N1	67	36	48	60	58	33	15	4.5	36	70
033M4 / 033M1	67	36	48	60	58	38	15	4.5	36	70
033V4 / 033V1	48	36	48	60	58	32	12	4.5	36	70
Type H263:										
033N4 / 033N1	67	50	69	88	58	33	15	4.5	36	72
033M4 / 033M1	67	50	69	88	58	38	15	4.5	36	72
033V4 / 033V1	48	50	69	88	58	32	12	4.5	36	72



20 A / 25 A / 32 A / 40 A / 63 A

ON-OFF Switch ■

3 ... 4 pole

IP66 (front)

Four hole mounting 36 × 36 mm

Order code structure:

Ordering example: 4 pole ON-OFF Switch, 63A, M-handle:

Type - Switching programme - Mounting form
H263 - 41400 - 003M1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		l n/o	l n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	
003M1		M-handle silver/black

Dimensions in mm:

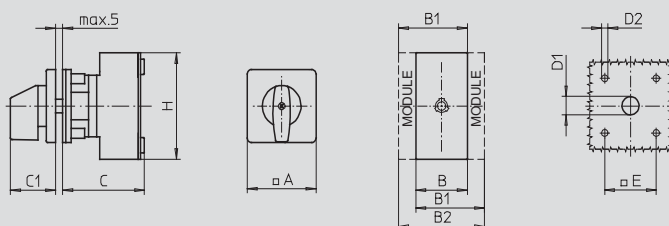

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233:										
003M1	48	36	48	60	58	32	12	4.5	36	70
Type H263:										
003M1	48	50	69	88	58	32	12	4.5	36	72

Four hole mounting 48 × 48 mm

20A / 25A / 32A / 40A / 63A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66 (front)

Four hole mounting 48 × 48 mm



Order code structure:

Ordering example: 6 pole Main/Emergency-Off Switch, 40A, M-padlock device:

Type - Switching programme - Mounting form

H233 - 41600 - 036M4

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			

Switching diagrams and further switching programmes page 95.


Mounting form	Operator	Main/Emergency-Off Switch
036N4		N-padlock device yellow/red
036M4		M-padlock device yellow/red
036V4		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
036N1		N-padlock device black
036M1		M-padlock device black
036V1		padlockable with V-handle silver/black

Dimensions in mm:

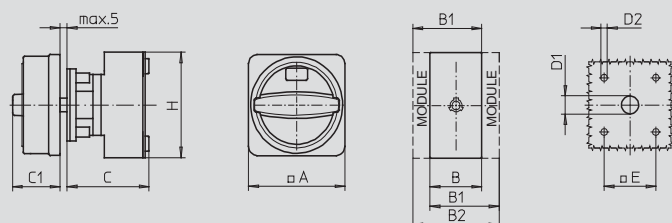

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):										
036N4 / 036N1	67	36	48	60	58	33	15	5	48	70
036M4 / 036M1	67	36	48	60	58	38	15	5	48	70
036V4 / 036V1	64	36	48	60	58	39	15	5	48	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):										
036N4 / 036N1	67	72	84	96	66	33	15	5	48	70
036M4 / 036M1	67	72	84	96	66	38	15	5	48	70
036V4 / 036V1	64	72	84	96	66	39	15	5	48	70
Type H263 (3 ... 4 pole):										
036N4 / 036N1	67	50	69	88	58	33	15	5	48	72
036M4 / 036M1	67	50	69	88	58	38	15	5	48	72
036V4 / 036V1	64	50	69	88	58	39	15	5	48	72

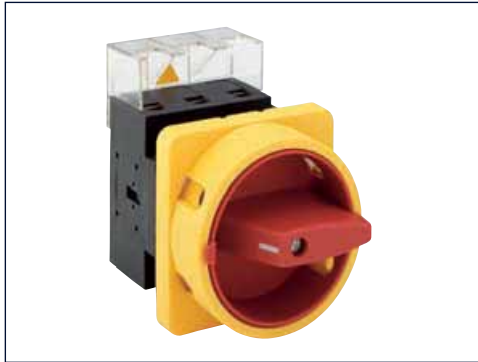**63 A / 80 A / 100 A / 125 A****Main/Emergency-Off Switch ■
Main Switch ■****3 ... 4 pole****IP66** (front)

Four hole mounting 48 × 48 mm

Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 80A, N-padlock device:

Type - Switching programme - Mounting form**H408 - 41400 - 033N4**





Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
033N4		N-padlock device yellow/red	033N1		N-padlock device black
033M4		M-padlock device yellow/red	033M1		M-padlock device black
033V4		padlockable with V-handle yellow/red	033V1		padlockable with V-handle silver/black

Dimensions in mm:

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
033N4 / 033N1	88	70	89	108	73	45	15	5	48	80
033M4 / 033M1	88	70	89	108	73	50	15	5	48	80
033V4 / 033V1	64	70	89	108	73	39	15	5	48	80

Four hole mounting 48 × 48 mm

20A / 25A / 32A / 40A / 63A

■ ON-OFF Switch

3 ... 8 pole

IP66 (front)

Four hole mounting 48 × 48 mm



Order code structure:

Ordering example: 6 pole ON-OFF Switch, 32A, M-handle:

Type - Switching programme - Mounting form

H226 - 41600 - 013M1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.





Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			

Switching diagrams and further switching programmes page 95.

Mounting form	Operator
013M1	M-handle silver/black

Dimensions in mm:



Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):										
013M1	64	36	48	60	58	39	15	5	48	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):										
013M1	64	72	84	96	66	39	15	5	48	70
Type H263 (3 ... 4 pole):										
013M1	64	50	69	88	58	39	15	5	48	72



63A / 80A / 100A / 125A

ON-OFF Switch ■

3 ... 4 pole

IP66 (front)

Four hole mounting 48 × 48 mm

Order code structure:

Ordering example: 3 pole ON-OFF Switch, 100A, M-handle:

Type - Switching programme - Mounting form

H410 - 41300 - 003M1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		l n/o	l n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator
003M1	 M-handle silver/black

Dimensions in mm:

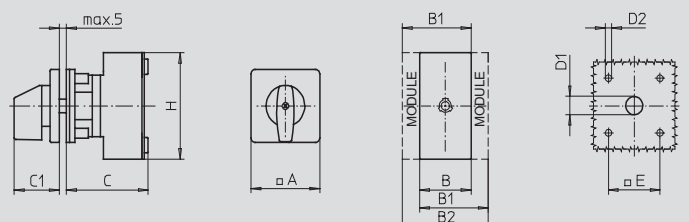

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
003M1	64	70	89	108	73	39	15	5	48	80

Four hole mounting 48 × 48 mm

20A / 25A / 32A / 40A

■ Changeover Switch

3 ... 4 pole

IP66 (front)

Four hole mounting 48 × 48 mm



Order code structure:

Ordering example: 4 pole Changeover Switch, 40A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 71400 - 013V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440 V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		 n/o pos. 1	 n/c pos. 1	 n/o pos. 2	 n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
013M1		M-handle silver/black	not padlockable
013V1	 	padlockable with V-handle silver/black	OFF position padlockable 12h
014V1	 	padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

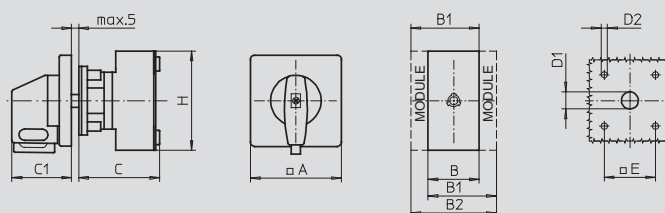

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
013M1 / 013V1 / 014V1	64	72	84	96	66	39	15	5	48	70



63A / 80A / 100A / 125A

Changeover Switch ■

3 ... 4 pole

IP66 (front)

Four hole mounting 48 × 48 mm

Order code structure:

Ordering example: 4 pole Changeover Switch, 63A, padlockable with V-handle:

Type - Switching programme - Mounting form

H406 - 71400 - 003V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
003M1		M-handle silver/black	not padlockable
003V1		padlockable with V-handle silver/black	OFF position padlockable 12h
004V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

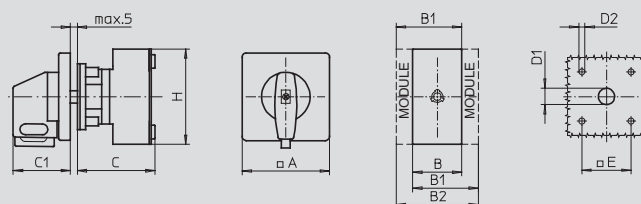

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
003M1 / 003V1 / 004V1	64	140	159	178	86	39	15	5	48	80

Four hole mounting 68 × 68 mm

63 A / 80 A / 100 A / 125 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66 (front)

Four hole front mounting 68 × 68 mm



Order code structure:

Ordering example: 8 pole Main Switch, 80 A, N-padlock device:

Type - Switching programme - Mounting form

H408 - 41800 - 036N1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c	6 ... 8 pole:		n/o	n/c
41300	3	0	0	41600	6	0	0
41311	3	1	1	41611	6	1	1
41320	3	2	0	41620	6	2	0
41400	4	0	0	41800	8	0	0
41411	4	1	1				
41420	4	2	0				

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
036N4		N-padlock device yellow/red	036N1		N-padlock device black
036M4		M-padlock device yellow/red	036M1		M-padlock device black

Dimensions in mm:

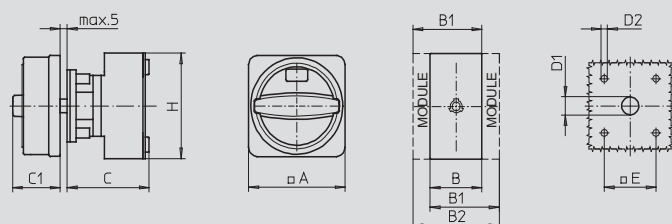

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H406 / H408 / H410 / H412 (3 ... 4 pole):										
036N4 / 036N1	88	70	89	108	73	45	15	5.5	68	80
036M4 / 036M1	88	70	89	108	73	50	15	5.5	68	80
Types H406 / H408 / H410 / H412 (6 ... 8 pole):										
036N4 / 036N1	88	140	159	178	86	45	15	5.5	68	80
036M4 / 036M1	88	140	159	178	86	50	15	5.5	68	80



63A / 80A / 100A / 125A

ON-OFF Switch ■

3 ... 8 pole

IP66 (front)

Four hole mounting 68 × 68 mm

Order code structure:

Ordering example: 8 pole ON-OFF Switch, 80A, M-handle:

Type - Switching programme - Mounting form

H408 - 41800 - 013M1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator
013M1	 M-handle silver/black

Dimensions in mm:

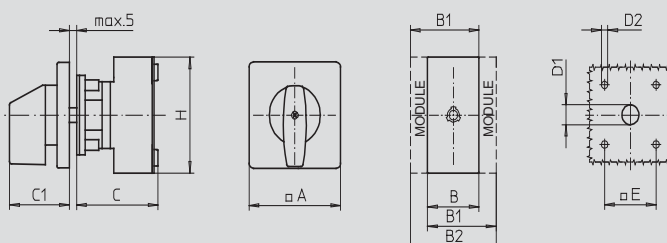

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H406 / H408 / H410 / H412 (3 ... 4 pole):										
013M1	88	70	89	108	73	52	15	5.5	68	80
Types H406 / H408 / H410 / H412 (6 ... 8 pole):										
013M1	88	140	159	178	86	52	15	5.5	68	80

Four hole mounting 68 × 68 mm

160A

ON-OFF Switch

3 ... 8 pole

IP55 (front)

Four hole mounting 68 × 68 mm



Order code structure:

Ordering example: 3 pole ON-OFF Switch, 160A, G-handle:

Type - Switching programme - Mounting form
K616 - 41300 - 003G1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator
003G1	G-handle silver/black

Dimensions in mm:		Switching programme	L
		41300	104
		41311	142
		41320	142
		41400	104
		41411	142
		41420	142
		41600	136
		41611	174
		41620	174
		41800	168



63A / 80A / 100A / 125A

Changeover Switch ■

3 ... 4 pole

IP66 (front)

Four hole mounting 68 × 68 mm

Order code structure:

Ordering example: 4 pole Changeover Switch, 125A, M-handle:

Type - Switching programme - Mounting form

H412 - 71400 - 013M1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		 n/o pos. 1	 n/c pos. 1	 n/o pos. 2	 n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	
013M1		M-handle silver/black

Dimensions in mm:

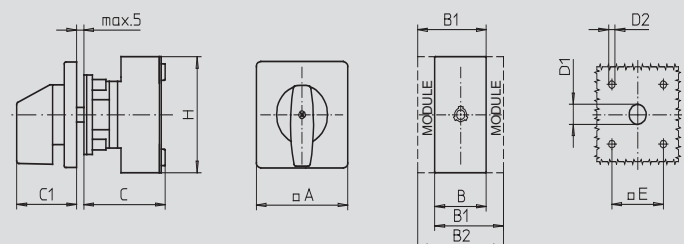

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
013M1	88	140	159	178	86	52	15	5.5	68	80

Four hole mounting 68 × 68 mm

160A

■ Changeover Switch

3 ... 4 pole

IP55 (front)

Four hole mounting 68 × 68 mm



Order code structure:

Ordering example: 3 pole Changeover Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 71300 - 004H1

Type	Rated data (IEC 60947)		
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		 n/o pos. 1	 n/c pos. 1	 n/o pos. 2	 n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
003H1	  H-padlock device silver/black	OFF position padlockable 12h
004H1	  H-padlock device silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

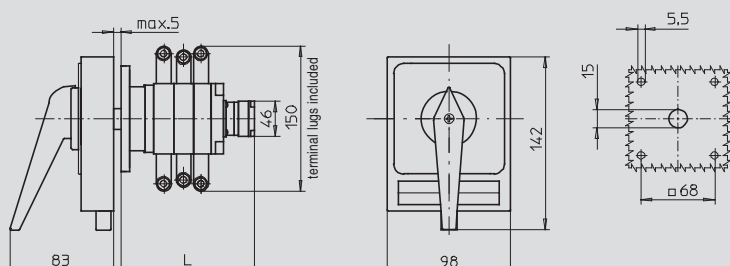

Switching programme	L
71300	136
71311	184
71322	184
71400	168



315A

ON-OFF Switch ■

3 ... 8 pole

IP55 (front)

Four hole mounting 104 × 104 mm

Order code structure:

Ordering example: 3 pole ON-OFF Switch, 315A, G-handle:

Type - Switching programme - Mounting form
K830 - 41300 - 003G1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator
003G1	G-handle silver/black

Dimensions in mm:		Switching programme	L
		41300	125
		41311	163
		41320	163
		41400	125
		41411	163
		41420	163
		41600	161
		41611	199
		41620	199
		41800	197

Four hole mounting 104 × 104 mm

315A

■ Changeover Switch

3 ... 4 pole

IP55 (front)

Four hole mounting 104 × 104 mm



Order code structure:

Ordering example: 3 pole Changeover Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 71300 - 004H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
003H1		OFF position padlockable 12h
004H1		3 positions padlockable (09h/12h/03h)

Dimensions in mm:

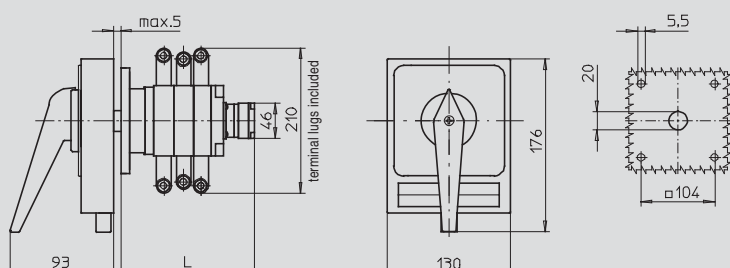

Switching programme	L
71300	161
71311	209
71322	209
71400	197



20 A / 25 A / 32 A / 40 A / 63 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66 (front)

Single hole mounting Ø 22.5 mm

Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H216 - 41400 - 206N4

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
206N4		N-padlock device yellow/red	206N1		N-padlock device black
206M4		M-padlock device yellow/red	206M1		M-padlock device black
206V4		padlockable with V-handle yellow/red	206V1		padlockable with V-handle silver/black

Dimensions in mm:

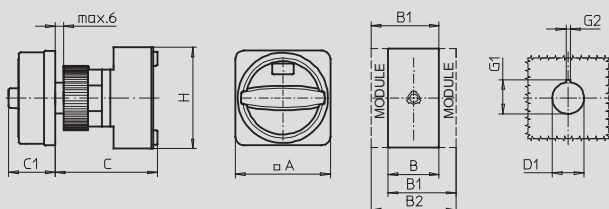

Mounting form	A	B	B1	B2	C	C1	D1	G1	G2	H
Types H216 / H220 / H226 / H233:										
206N4 / 206N1	67	36	48	60	75	33	22.5	24.2	3.2	70
206M4 / 206M1	67	36	48	60	75	38	22.5	24.2	3.2	70
206V4 / 206V1	48	36	48	60	75	32	22.5	24.2	3.2	70
Type H263:										
206N4 / 206N1	67	50	69	88	75	33	22.5	24.2	3.2	72
206M4 / 206M1	67	50	69	88	75	38	22.5	24.2	3.2	72
206V4 / 206V1	48	50	69	88	75	32	22.5	24.2	3.2	72

Single hole mounting Ø 22.5 mm

20A / 25A / 32A / 40A / 63A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66 (front)

Single hole mounting Ø 22.5 mm



Order code structure:

Ordering example: 8 pole Main/Emergency-Off Switch, 40A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 41800 - 226V4

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
226V4		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
226V1		padlockable with V-handle silver/black

Dimensions in mm:

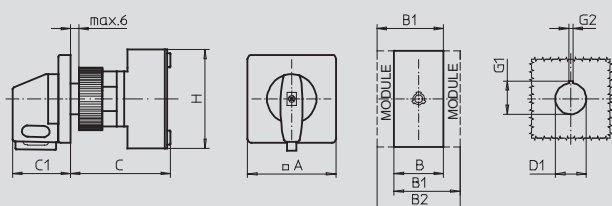

Mounting form	A	B	B1	B2	C	C1	D1	G1	G2	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):										
226V4 / 226V1	64	36	48	60	75	39	22.5	24.2	3.2	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):										
226V4 / 226V1	64	72	84	96	83	39	22.5	24.2	3.2	70
Type H263 (3 ... 4 pole):										
226V4 / 226V1	64	50	69	88	75	39	22.5	24.2	3.2	72



20A / 25A / 32A / 40A / 63A

ON-OFF Switch ■

3 ... 4 pole

IP66 (front)

Single hole mounting Ø 22.5 mm

Order code structure:

Ordering example: 3 pole ON-OFF Switch, 20A, M-handle:

Type - Switching programme - Mounting form
H216 - 41300 - 219M1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20




Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		l n/o	l n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator
219M1	 M-handle silver/black

Dimensions in mm:



Mounting form	A	B	B1	B2	C	C1	D1	G1	G2	H
Types H216 / H220 / H226 / H233: 219M1	48	36	48	60	75	32	22.5	24.2	3.2	70
Type H263: 219M1	48	50	69	88	75	32	22.5	24.2	3.2	72

Single hole mounting Ø 22.5 mm

20A / 25A / 32A / 40A / 63A

■ ON-OFF Switch

3 ... 8 pole

IP66 (front)

Single hole mounting Ø 22.5 mm



Order code structure:

Ordering example: 4 pole ON-OFF Switch, 40A, M-handle:

Type - Switching programme - Mounting form

H233 - 41400 - 214M1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			

Switching diagrams and further switching programmes page 95.

Mounting form	Operator
214M1	 M-handle silver/black

Dimensions in mm:

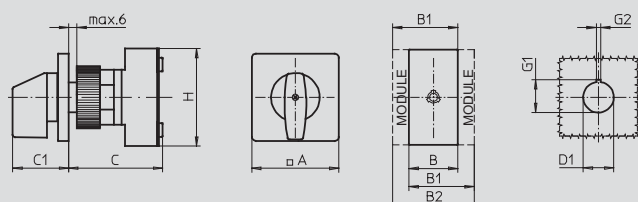

Mounting form	A	B	B1	B2	C	C1	D1	G1	G2	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):										
214M1	64	36	48	60	75	39	22.5	24.2	3.2	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):										
214M1	64	72	84	96	83	39	22.5	24.2	3.2	70
Type H263 (3 ... 4 pole):										
214M1	64	50	69	88	75	39	22.5	24.2	3.2	72

20 A / 25 A / 32 A / 40 A

Changeover Switch ■

3 ... 4 pole

IP66 (front)

Single hole mounting Ø 22.5 mm

Order code structure:

Ordering example: 3 pole Changeover Switch, 32A, padlockable with V-handle:

Type - Switching programme - Mounting form

H226 - 71300 - 214V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
214M1		M-handle silver/black	not padlockable
214V1		padlockable with V-handle silver/black	OFF position padlockable 12h
213V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

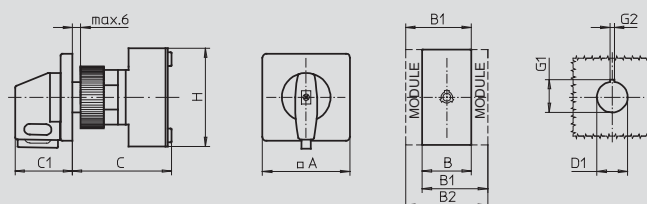

Mounting form	A	B	B1	B2	C	C1	D1	G1	G2	H
214M1/214V1/213V1	64	72	84	96	83	39	22.5	24.2	3.2	70

Snap on mounting

DIN Rail

20A / 25A / 32A / 40A / 63A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP30 (front)

Installation mounting for 45 mm aperture in Panel/Distribution boards



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 40A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 41400 - 026V4

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		Terminals
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
026V4		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
026V1		padlockable with V-handle silver/black

Dimensions in mm:

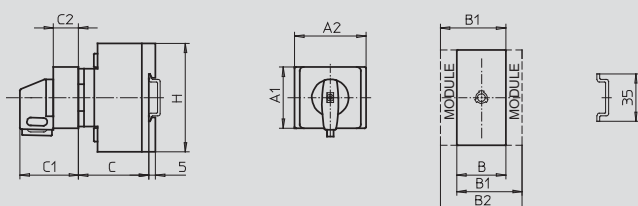

Mounting form	A1	A2	B	B1	B2	C	C1	C2	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):									
026V4 / 026V1	45	48	36	48	60	38	45	18.5	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):									
026V4 / 026V1	45	76	72	84	96	40	51.5	25.5	70
Type H263 (3 ... 4 pole):									
026V4 / 026V1	45	52.5	50	69	88	38	45	18.5	72

63 A / 80 A / 100 A / 125 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP30 (front)

Installation mounting for 45 mm aperture in Panel/Distribution boards



Order code structure:

Ordering example: 6 pole Main Switch, 125A, padlockable with V-handle:

Type - **Switching programme** - **Mounting form**

H412 - 41600 - 126V1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c	6 ... 8 pole:		n/o	n/c
41300	3	0	0	41600	6	0	0
41311	3	1	1	41611	6	1	1
41320	3	2	0	41620	6	2	0
41400	4	0	0	41800	8	0	0
41411	4	1	1				
41420	4	2	0				

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
126V4		padlockable with V-handle yellow/red	126V1		padlockable with V-handle grey/black

Dimensions in mm:

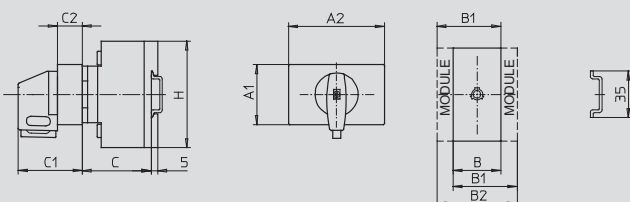

Mounting form	A1	A2	B	B1	B2	C	C1	C2	H
Types H406 / H408 / H410 / H412 (3 ... 4 pole):									
126V4 / 126V1	45	72	70	89	108	55	48	16	80
Types H406 / H408 / H410 / H412 (6 ... 8 pole):									
126V4 / 126V1	45	72	140	159	178	67	48	16	80

Snap on mounting

DIN Rail

20A / 25A / 32A / 40A / 63A

■ ON-OFF Switch

3 ... 8 pole

IP30 (front)

Installation mounting for 45 mm aperture in Panel/Distribution boards



Order code structure:

Ordering example: 4 pole ON-OFF Switch, 63A, N-handle:

Type - Switching programme - Mounting form

H263 - 41400 - 026N2

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440 V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts		Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c	6 ... 8 pole:		n/o	n/c
41300	3	0	0	41600	6	0	0
41311	3	1	1	41611	6	1	1
41320	3	2	0	41620	6	2	0
41400	4	0	0	41800	8	0	0
41411	4	1	1	not available for type H263			
41420	4	2	0				

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	
026N2 *		N-handle silver/grey
026M1		M-handle silver/black

* for 3 ... 4 pole switching programmes only

Dimensions in mm:

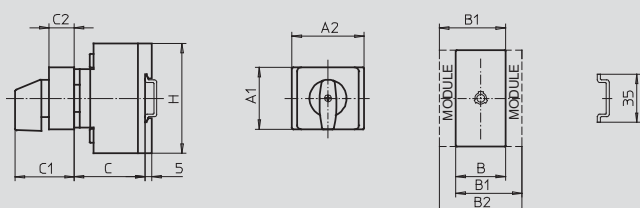

Mounting form	A1	A2	B	B1	B2	C	C1	C2	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):									
026M1	45	48	36	48	60	38	45	18.5	70
026N2	45	48	36	48	60	38	40	18.5	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):									
026M1	45	76	72	84	96	40	51.5	25.5	70
Type H263 (3 ... 4 pole):									
026M1	45	52.5	50	69	88	38	45	18.5	72
026N2	45	52.5	50	69	88	38	40	18.5	72

63A / 80A / 100A / 125A

ON-OFF Switch ■

3 ... 8 pole

IP30 (front)

Installation mounting for 45 mm aperture in Panel/Distribution boards



Order code structure:

Ordering example: 8 pole ON-OFF Switch, 100A, M-handle:

Type - Switching programme - Mounting form

H410 - 41800 - 126M1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c	6 ... 8 pole:		n/o	n/c
41300	3	0	0	41600	6	0	0
41311	3	1	1	41611	6	1	1
41320	3	2	0	41620	6	2	0
41400	4	0	0	41800	8	0	0
41411	4	1	1				
41420	4	2	0				

Switching diagrams and further switching programmes page 95.

Mounting form	Operator
126M1	M-handle grey/black

Dimensions in mm:

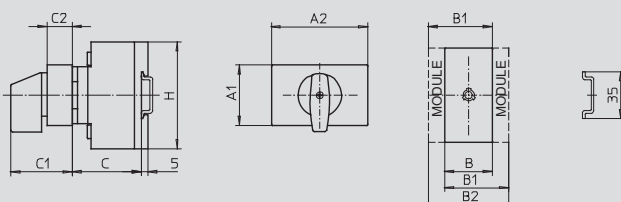

Mounting form	A1	A2	B	B1	B2	C	C1	C2	H
Types H406 / H408 / H410 / H412 (3 ... 4 pole):									
126M1	45	72	70	89	108	55	48	16	80
Types H406 / H408 / H410 / H412 (6 ... 8 pole):									
126M1	45	72	140	159	178	67	48	16	80

Snap on mounting

DIN Rail

20A / 25A / 32A / 40A

■ Changeover Switch

3 ... 4 pole

IP30 (front)

Installation mounting for 45 mm aperture in Panel/Distribution boards



Order code structure:

Ordering example: 4 pole changeover, 25A, padlockable with V-handle:

Type - Switching programme - Mounting form

H220 - 71400 - 028V1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		Terminals
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
026M1		M-handle silver/black	not padlockable
028V1		padlockable with V-handle silver/black	OFF position padlockable 12h
027V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

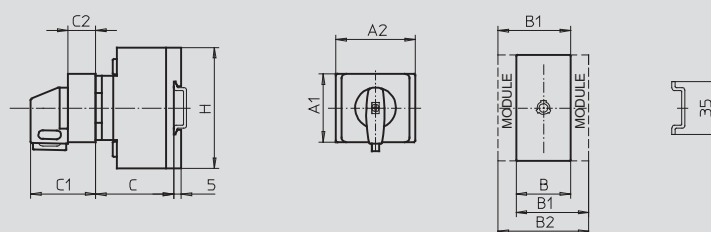

Mounting form	A1	A2	B	B1	B2	C	C1	C2	H
026M1 / 028V1 / 027V1	45	76	72	84	96	40	51.5	25.5	70

63A / 80A / 100A / 125A

Changeover Switch ■

3 ... 4 pole

IP30 (front)

Installation mounting for 45 mm aperture in Panel/Distribution boards

Order code structure:

Ordering example: 4 pole changeover, 63A, padlockable with V-handle:

Type - Switching programme - Mounting form

H406 - 71400 - 128V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		 n/o pos. 1	 n/c pos. 1	 n/o pos. 2	 n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
126M1	 M-handle grey/black	not padlockable
128V1	 padlockable with V-handle grey/black	OFF position padlockable 12h
127V1	 padlockable with V-handle grey/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

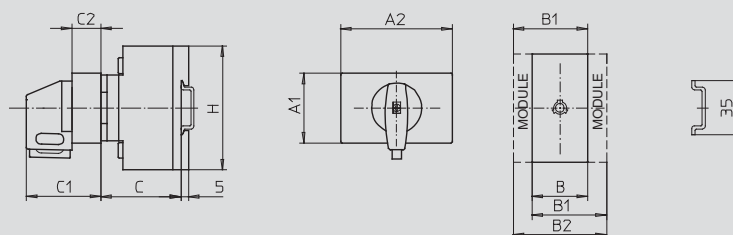

Mounting form	A1	A2	B	B1	B2	C	C1	C2	H
126M1 / 128V1 / 127V1	45	72	140	159	178	67	48	16	80

Snap on mounting

Door interlock with modular shaft extension

20 A / 25 A / 32 A / 40 A / 63 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66 (front)

Four hole front mounting 36 × 36 mm



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 40A, M-padlock device:

Type - Switching programme - Mounting form

H233 - 41300 - 234M4

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440 V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			


Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch
234N4		N-padlock device yellow/red
234M4		M-padlock device yellow/red
234V4 *		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
234N1		N-padlock device black
234M1		M-padlock device black
234V1 *		padlockable with V-handle silver/black

*for 3 ... 4 pole switching programmes only

Dimensions in mm:

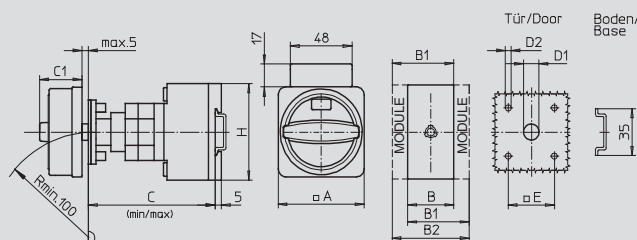

Modular shaft extensions see page 102.

Mounting form	A	B	B1	B2	C _{min}	C _{max}	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):											
234N4 / 234N1	67	36	48	60	92	107	33	15	4.5	36	70
234M4 / 234M1	67	36	48	60	92	107	38	15	4.5	36	70
234V4 / 234V1	48	36	48	60	92	107	32	12	4.5	36	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):											
234N4 / 234N1	67	72	84	96	100	115	33	15	4.5	36	70
234M4 / 234M1	67	72	84	96	100	115	38	15	4.5	36	70
Type H263 (3 ... 4 pole):											
234N4 / 234N1	67	50	69	88	92	107	33	15	4.5	36	72
234M4 / 234M1	67	50	69	88	92	107	38	15	4.5	36	72
234V4 / 234V1	48	50	69	88	92	107	32	12	4.5	36	72

Door interlock with modular shaft extension

With N/PE connection link

20 A / 25 A / 32 A / 40 A / 63 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66 (front)

Four hole front mounting 36 × 36 mm



Order code structure:

Ordering example: 8 pole Main Switch, 32A, N-padlock device:

Type - Switching programme - Mounting form

H226 - 41800 - 534N1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0
not available for types H216, H220, H226, H233			

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			


Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
534N4		N-padlock device yellow/red
534M4		M-padlock device yellow/red
534V4 *		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
534N1		N-padlock device black
534M1		M-padlock device black
534V1 *		padlockable with V-handle silver/black

*for 3 ... 4 pole switching programmes only

Dimensions in mm:

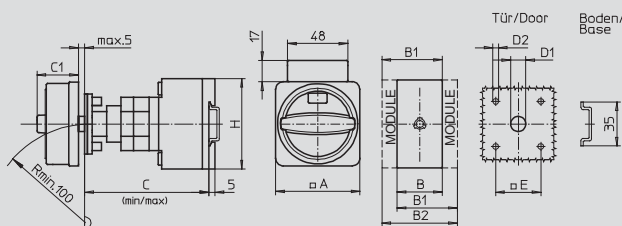

Modular shaft extensions see page 102.

Mounting form	A	B	B1	B2	C _{min}	C _{max}	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233 (6 ... 8 pole):											
534N4 / 534N1	67	72	84	96	100	115	33	15	4.5	36	70
534M4 / 534M1	67	72	84	96	100	115	38	15	4.5	36	70
Type H263 (3 ... 4 pole):											
534N4 / 534N1	67	50	69	88	92	107	33	15	4.5	36	72
534M4 / 534M1	67	50	69	88	92	107	38	15	4.5	36	72
534V4 / 534V1	48	50	69	88	92	107	32	12	4.5	36	72

20 A / 25 A / 32 A / 40 A

Changeover Switch ■

3 ... 4 pole

IP66 (front)

Four hole front mounting 48 × 48 mm



Order code structure:

Ordering example: 4 pole changeover, 40A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 71400 - 249V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
248M1		M-handle silver/black	not padlockable
248V1		padlockable with V-handle silver/black	OFF position padlockable 12h
249V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

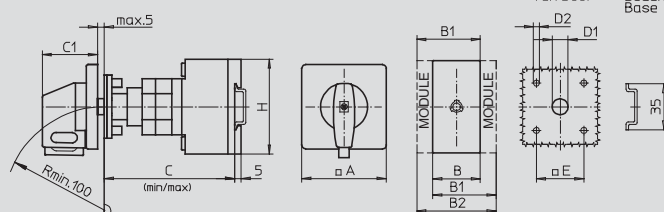

Modular shaft extensions
see page 102.

Mounting form	A	B	B1	B2	C _{min}	C _{max}	C1	D1	D2	E	H
248M1 / 248V1 / 249V1	64	72	84	96	100	115	39	15	5	48	70

Snap on mounting

Door interlock with modular shaft extension

63A / 80A / 100A / 125A

■ Changeover Switch

3 ... 4 pole

IP66 (front)

Four hole front mounting 48 × 48 mm



Order code structure:

Ordering example: 3 pole changeover, 125A, padlockable with V-handle:

Type - Switching programme - Mounting form

H412 - 71300 - 242V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440 V) AC-23A (kW) AC-3 (kW)		
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
242M1		M-handle silver/black	not padlockable
242V1		padlockable with V-handle silver/black	OFF position padlockable 12h
243V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

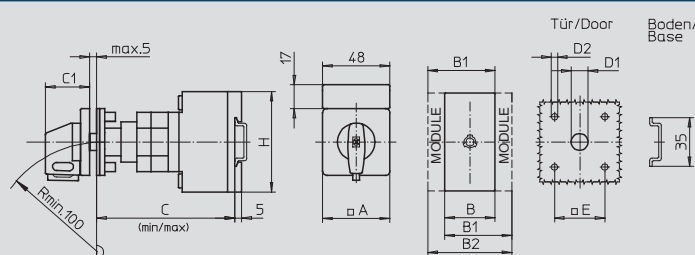Modular shaft extensions
see page 102.

Mounting form	A	B	B1	B2	C _{min}	C _{max}	C1	D1	D2	E	H
242M1 / 242V1 / 243V1	64	140	159	178	115	130	40	15	5	48	80

Door interlock with metal shaft extension

Single hole front mounting

20 A / 25 A / 32 A / 40 A / 63 A

**Main/Emergency-Off Switch ■
Main Switch ■**

3 ... 4 pole

IP66 (front)

Single hole front mounting Ø 22.5 mm



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 40A, M-padlock device:

Type - Switching programme - Mounting form

H233 - 41300 - 281M4

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
281N4		N-padlock device yellow/red	281N1		N-padlock device black
281M4		M-padlock device yellow/red	281M1		M-padlock device black
281V4		padlockable with V-handle yellow/red	281V1		padlockable with V-handle silver/black

Dimensions in mm:

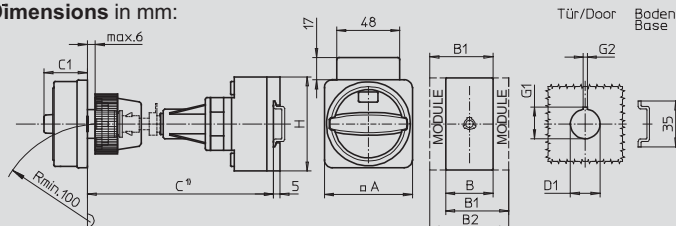

¹⁾ Internal depth: outside of door to top of DIN rail.

Metal shaft is not included. Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	G1	G2	H
Types H216 / H220 / H226 / H233:									
281N4 / 281N1	67	36	48	60	33	22.5	24.2	3.2	70
281M4 / 281M1	67	36	48	60	38	22.5	24.2	3.2	70
281V4 / 281V1	48	36	48	60	32	22.5	24.2	3.2	70
Type H263:									
281N4 / 281N1	67	50	69	88	33	22.5	24.2	3.2	72
281M4 / 281M1	67	50	69	88	38	22.5	24.2	3.2	72
281V4 / 281V1	48	50	69	88	32	22.5	24.2	3.2	72

Snap on mounting

Door interlock with metal shaft extension

Single hole front mounting

20A / 25A / 32A / 40A / 63A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66 (front)

Single hole front mounting $\varnothing$ 22.5 mm

Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 40A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 41400 - 289V4

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
3 ... 4 pole:			
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0
6 ... 8 pole:			
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0
not available for type H263			

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
289V4		padlockable with V-handle yellow/red	289V1		padlockable with V-handle silver/black

Dimensions in mm:

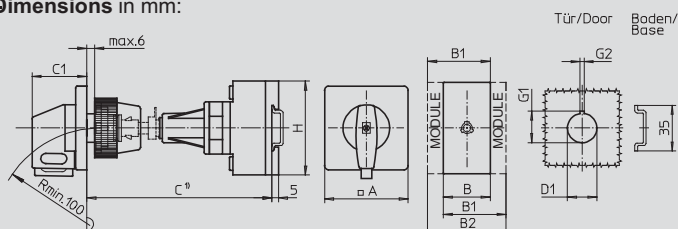

1) Internal depth: outside of door to top of DIN rail.

Metal shaft is not included. Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	G1	G2	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):									
289V4 / 289V1	64	36	48	60	39	22.5	24.2	3.2	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):									
289V4 / 289V1	64	72	84	96	39	22.5	24.2	3.2	70
Type H263 (3 ... 4 pole):									
289V4 / 289V1	64	50	69	88	39	22.5	24.2	3.2	72

Door interlock with metal shaft extension

Single hole front mounting

63A / 80A / 100A / 125A

**Main/Emergency-Off Switch ■
Main Switch ■**

3 ... 8 pole

IP66 (front)

Single hole front mounting Ø 22.5 mm



Order code structure:

Ordering example: 8 pole Main/Emergency-Off Switch, 63A, N-padlock device:

Type - Switching programme - Mounting form

H406 - 41800 - 281N4

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	Terminals	
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
281N4		N-padlock device yellow/red
281M4		M-padlock device yellow/red
281V4		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
281N1		N-padlock device black
281M1		M-padlock device black
281V1		padlockable with V-handle silver/black

Dimensions in mm:

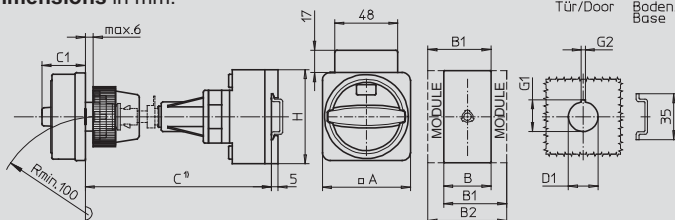

¹⁾ Internal depth: outside of door to top of DIN rail.

Metal shaft is not included. Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	G1	G2	H
Types H406 / H408 / H410 / H412 (3 ... 4 pole):									
281N4 / 281N1	67	70	89	108	33	22.5	24.2	3.2	80
281M4 / 281M1	67	70	89	108	38	22.5	24.2	3.2	80
281V4 / 281V1	64	70	89	108	39	22.5	24.2	3.2	80
Types H406 / H408 / H410 / H412 (6 ... 8 pole):									
281N4 / 281N1	67	140	159	178	33	22.5	24.2	3.2	80
281M4 / 281M1	67	140	159	178	38	22.5	24.2	3.2	80
281V4 / 281V1	64	140	159	178	39	22.5	24.2	3.2	80

Snap on mounting

Door interlock with metal shaft extension

Four hole front mounting

20A / 25A / 32A / 40A / 63A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66 (front)

Four hole front mounting 36 × 36 mm



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H216 - 41400 - 483N4

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW)	AC-3 (kW)	Terminals
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
483N4		N-padlock device yellow/red	483N1		N-padlock device black
483M4		M-padlock device yellow/red	483M1		M-padlock device black
483V4		padlockable with V-handle yellow/red	483V1		padlockable with V-handle silver/black

Dimensions in mm:

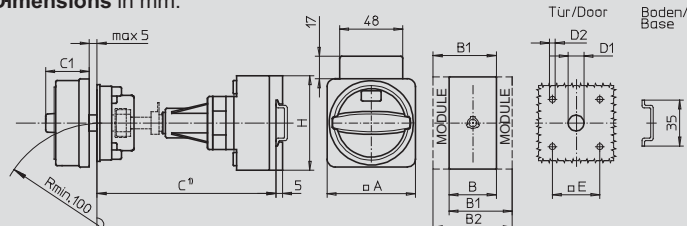¹⁾ Internal depth: inside of door to top of DIN rail.

Metal shaft is not included. Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233:									
483N4 / 483N1	67	36	48	60	33	15	4.5	36	70
483M4 / 483M1	67	36	48	60	38	15	4.5	36	70
483V4 / 483V1	48	36	48	60	32	15	4.5	36	70
Type H263:									
483N4 / 483N1	67	50	69	88	33	15	4.5	36	72
483M4 / 483M1	67	50	69	88	38	15	4.5	36	72
483V4 / 483V1	48	50	69	88	32	15	4.5	36	72

Door interlock with metal shaft extension

Four hole front mounting

20 A / 25 A / 32 A / 40 A / 63 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66 (front)

Four hole front mounting 48 × 48 mm



Order code structure:

Ordering example: 8 pole Main Switch, 25A, padlockable with V-handle:

Type - Switching programme - Mounting form

H220 - 41800 - 484V1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		Terminals
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c	6 ... 8 pole:		n/o	n/c
41300	3	0	0	41600	6	0	0
41311	3	1	1	41611	6	1	1
41320	3	2	0	41620	6	2	0
41400	4	0	0	41800	8	0	0
41411	4	1	1	not available for type H263			
41420	4	2	0				

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
484N4		N-padlock device yellow/red	484N1		N-padlock device black
484M4		M-padlock device yellow/red	484M1		M-padlock device black
484V4		padlockable with V-handle yellow/red	484V1		padlockable with V-handle silver/black

Dimensions in mm:

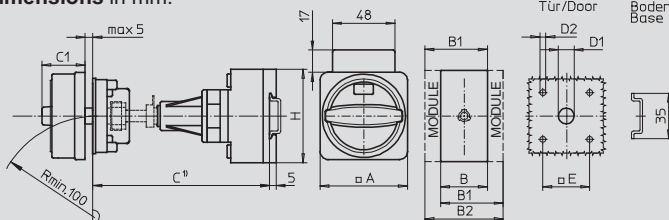

1) Internal depth: inside of door to top of DIN rail.

Metal shaft is not included. Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233 (3 ... 4 pole):									
484N4 / 484N1	67	36	48	60	33	15	5	48	70
484M4 / 484M1	67	36	48	60	38	15	5	48	70
484V4 / 484V1	64	36	48	60	39	15	5	48	70
Types H216 / H220 / H226 / H233 (6 ... 8 pole):									
484N4 / 484N1	67	72	84	96	33	15	5	48	70
484M4 / 484M1	67	72	84	96	38	15	5	48	70
484V4 / 484V1	64	72	84	96	39	15	5	48	70
Type H263 (3 ... 4 pole):									
484N4 / 484N1	67	50	69	88	33	15	5	48	72
484M4 / 484M1	67	50	69	88	38	15	5	48	72
484V4 / 484V1	64	50	69	88	39	15	5	48	72

Snap on mounting

Door interlock with metal shaft extension

Four hole front mounting

63A / 80A / 100A / 125A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66 (front)

Four hole front mounting 48 × 48 mm



Order code structure:

Ordering example: 6 pole Main Switch, 125A, N-padlock device:

Type - Switching programme - Mounting form

H412 - 41600 - 483N1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440 V) AC-23A (kW) AC-3 (kW)		
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
483N4		N-padlock device yellow/red	483N1		N-padlock device black
483M4		M-padlock device yellow/red	483M1		M-padlock device black
483V4		padlockable with V-handle yellow/red	483V1		padlockable with V-handle silver/black

Dimensions in mm:

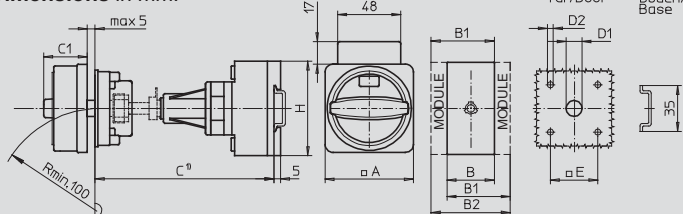

1) Internal depth: inside of door to top of DIN rail.

Metal shaft is not included. Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	D2	E	H
Types H406 / H408 / H410 / H412 (3 ... 4 pole):									
483N4 / 483N1	88	70	89	108	45	15	5	48	80
483M4 / 483M1	88	70	89	108	50	15	5	48	80
483V4 / 483V1	64	70	89	108	40	15	5	48	80
Types H406 / H408 / H410 / H412 (6 ... 8 pole):									
483N4 / 483N1	88	140	159	178	45	15	5	48	80
483M4 / 483M1	88	140	159	178	50	15	5	48	80
483V4 / 483V1	64	140	159	178	40	15	5	48	80

Door interlock with metal shaft extension

Single hole front mounting

20 A / 25 A / 32 A / 40 A

Changeover Switch ■

3 ... 4 pole

IP66 (front)

Single hole front mounting Ø 22.5 mm



Order code structure:

Ordering example: 4 pole changeover, 40A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 71400 - 285V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
285M1		M-handle silver/black	not padlockable
285V1		padlockable with V-handle silver/black	OFF position padlockable 12h
291V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

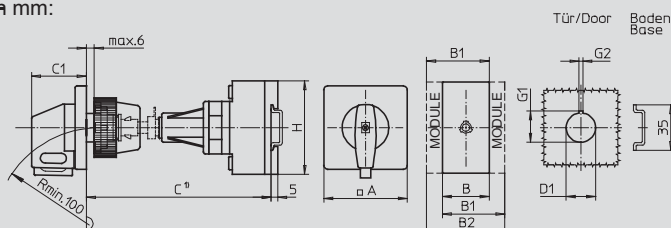

Metal shaft is not included.
Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	G1	G2	H
285M1 / 285V1 / 291V1	64	72	84	96	39	22.5	24.2	3.2	70

¹⁾ Internal depth: outside of door to top of DIN rail.

Snap on mounting

Door interlock with metal shaft extension

Single hole front mounting

63A / 80A / 100A / 125A

■ Changeover Switch

3 ... 4 pole

IP66 (front)

Single hole front mounting $\varnothing$ 22.5 mm

Order code structure:

Ordering example: 4 pole changeover, 80A, padlockable with V-handle:

Type - Switching programme - Mounting form

H408 - 71400 - 293V1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
283V1	padlockable with V-handle silver/black	OFF position padlockable 12h
293V1	padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:*

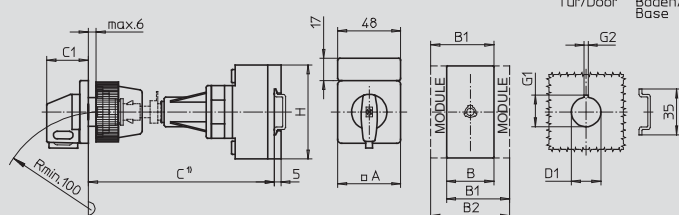Metal shaft is not included.
Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	G1	G2	H
283V1 / 293V1	64	140	159	178	39	22.5	24.2	3.2	80

*) Internal depth: outside of door to top of DIN rail.



Order code structure:

Ordering example: 3 pole changeover, 32A, padlockable with V-handle:

Type - Switching programme - Mounting form

H226 - 71300 - 482V1

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
482M1		M-handle silver/black	not padlockable
482V1		padlockable with V-handle silver/black	OFF position padlockable 12h
449V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

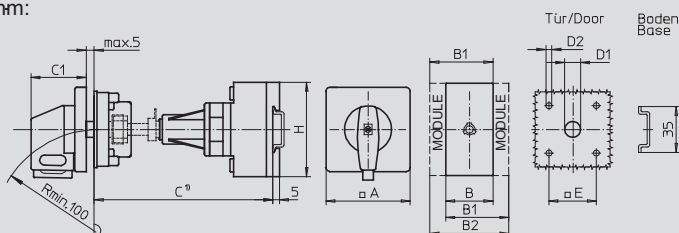

Metal shaft is not included.
Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	D2	E	H
482M1 / 482V1 / 449V1	64	72	84	96	39	15	5	48	70

¹⁾ Internal depth: inside of door to top of DIN rail.

Snap on mounting

Door interlock with metal shaft extension

Four hole front mounting

63A / 80A / 100A / 125A

■ Changeover Switch

3 ... 4 pole

IP66 (front)

Four hole front mounting 48 × 48 mm



Order code structure:

Ordering example: 4 pole changeover, 100A, M-handle:

Type - Switching programme - Mounting form

H410 - 71400 - 481M1

Type	Rated data (IEC 60947)			Degree of protection
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		Terminals
H406	63	22	18.5	IP1B
H408	80	30	22	IP1B
H410	100	37	30	IP1B
H412	125	45	37	IP1B


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		 n/o pos. 1	 n/c pos. 1	 n/o pos. 2	 n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
481M1		M-handle silver/black	not padlockable
481V1	 	padlockable with V-handle silver/black	OFF position padlockable 12h
485V1	 	padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

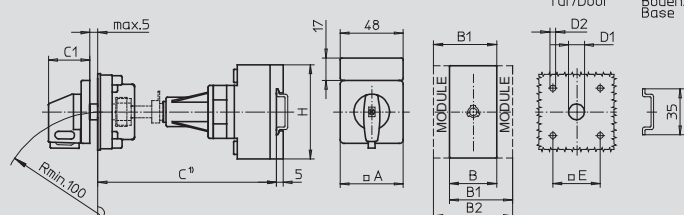Metal shaft is not included.
Please order separately, see page 103.

Mounting form	A	B	B1	B2	C1	D1	D2	E	H
481M1 / 481V1 / 485V1	64	140	159	178	40	15	5	48	80

¹⁾ Internal depth: inside of door to top of DIN rail.

Four hole mounting 68 × 68 mm

Door interlock

160A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 6 pole

IP55 (front)

Four hole front mounting 68 × 68 mm



Order code structure:

Ordering example: 3 pole Main Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 41300 - 034H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41400	4	0	0


Switching progr.	Poles	Auxiliary contacts	
6 pole:		n/o	n/c
41600	6	0	0

Switching diagrams page 95.

Mounting form	Operator	Main/Emergency-Off Switch
034H4		H-padlock device yellow/red

Mounting form	Operator	Main Switch
034H1		H-padlock device silver/black

Dimensions in mm:

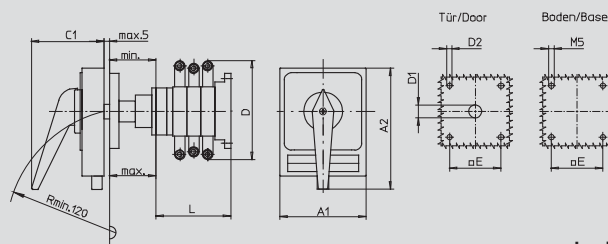

Type	A1	A2	C1	D*	D1	D2	E	min.	max.	L with ... stages			
K616	98	142	83	150	15	5.5	68	48	60	1	2	3	4
* terminal lugs included													

Four hole mounting 68 × 68 mm

Door interlock

160A

■ ON-OFF Switch

3 ... 8 pole

IP55 (front)

Four hole front mounting 68 × 68 mm



Order code structure:

Ordering example: 8 pole ON-OFF Switch, 160A, G-handle:

Type - Switching programme - Mounting form

K616 - 41800 - 042G1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41400	4	0	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41800	8	0	0

Switching diagrams page 95.

Mounting form	Operator	
042G1		G-handle silver/black

Dimensions in mm:

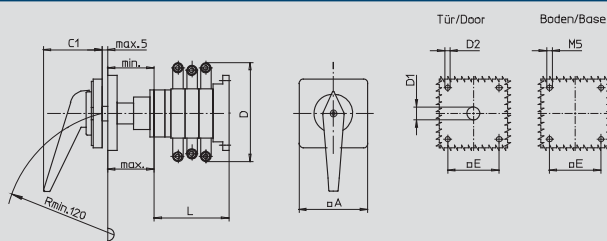

Type	A	C1	D*	D1	D2	E	min.	max.	L with ... stages			
K616	88	66	150	15	5.5	68	48	60	1	2	3	4
* terminal lugs included												

Four hole mounting 68 × 68 mm

Door interlock

160A

Changeover Switch ■

3 ... 4 pole

IP55 (front)

Four hole front mounting 68 × 68 mm



Order code structure:

Ordering example: 4 pole changeover, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 71400 - 042H1

Type	Rated data (IEC 60947)		
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71400	4	0	0	0	0

Switching diagrams page 95.

Mounting form	Operator	Padlockable options
042H1	H-padlock device silver/black	OFF position padlockable 12h
043H1	H-padlock device silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

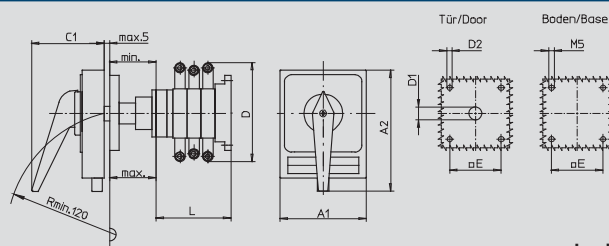

Type	A1	A2	C1	D*	D1	D2	E	min.	max.	L with ... stages			
K616	98	142	83	150	15	5.5	68	48	60	1	2	3	4
* terminal lugs included													

Four hole mounting 104 × 104 mm

Door interlock

315A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP55 (front)

Four hole front mounting 104 × 104 mm



Order code structure:

Ordering example: 3 pole Main Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 41300 - 034H1


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching Diagram	
		n/o	n/c		
41300	3	0	0		
41400	4	0	0		

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
034H4		H-padlock device yellow/red	034H1		H-padlock device silver/black

Dimensions in mm:

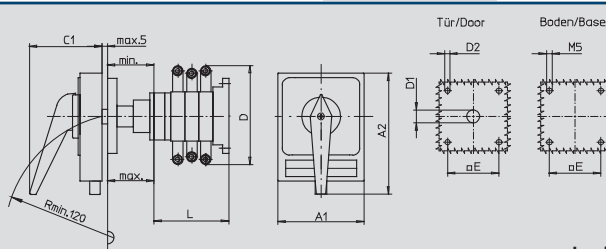

Type	A1	A2	C1	D*	D1	D2	E	min.	max.	L with ... stages			
K830	130	176	93	210	20	5.5	104	75	102	1	2	3	4
* terminal lugs included													

Four hole mounting 104 × 104 mm

Door interlock

315A

ON-OFF Switch ■

3 ... 8 pole

IP55 (front)

Four hole front mounting 104 × 104 mm



Order code structure:

Ordering example: 8 pole ON-OFF Switch, 315A, G-handle:

Type - Switching programme - Mounting form

K830 - 41800 - 042G1

Type	Rated data (IEC 60947)		
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41400	4	0	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41800	8	0	0

Switching diagrams page 95.

Mounting form	Operator
042G1	G-handle silver/black

Dimensions in mm:

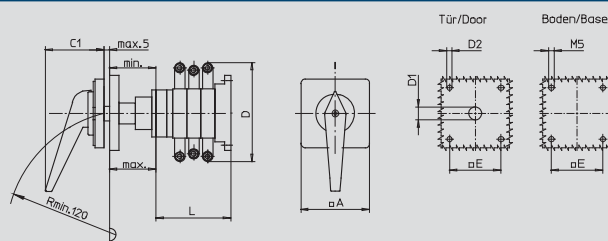

Type	A	C1	D*	D1	D2	E	min.	max.	L with ... stages			
K830	130	74	210	20	5.5	104	75	102	1	2	3	4
* terminal lugs included												

Four hole mounting 104 × 104 mm

Door interlock

315A

■ Changeover Switch

3 ... 4 pole

IP55 (front)

Four hole front mounting 104 × 104 mm



Order code structure:

Ordering example: 4 pole changeover, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 71400 - 042H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71400		0	0	0	0

Switching diagrams page 95.

Mounting form	Operator		Padlockable options
042H1		H-padlock device silver/black	OFF position padlockable 12h
043H1		H-padlock device silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

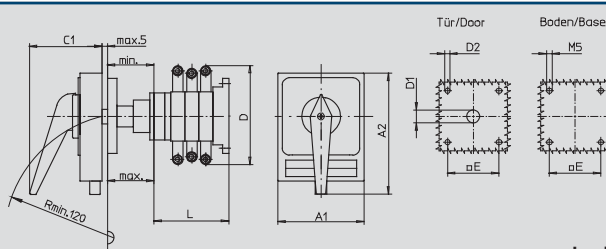

Type	A1	A2	C1	D*	D1	D2	E	min.	max.	L with ... stages			
										1	2	3	4
K830	130	176	93	210	20	5.5	104	75	102	89	125	161	197

* terminal lugs included



Four hole mounting 150 × 270 mm

Door interlock with mounting plate

160A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66 (front)

Four hole front mounting 48 × 48 mm

Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 41300 - 483H4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
483H4		H-padlock device yellow/red

Mounting form	Operator	Main Switch
483H1		H-padlock device silver/black

Dimensions in mm:

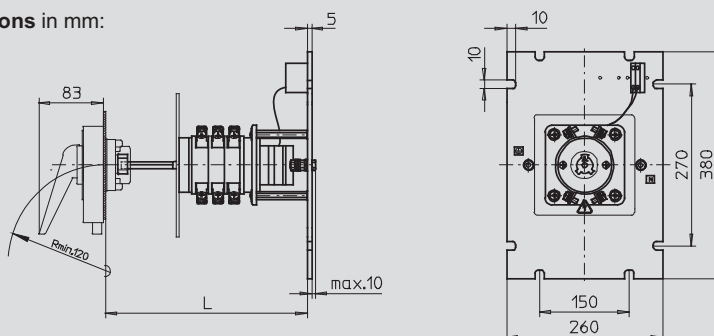

Switching programme	L
41300 and 41400	150
other programmes:	225

Four hole mounting 150 × 270 mm

Door interlock with mounting plate

315A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP55 (front)

Four hole front mounting 104 × 104 mm



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 41300 - 483H4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.


Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
483H4		 H-padlock device yellow/red	483H1		 H-padlock device silver/black

Dimensions in mm:

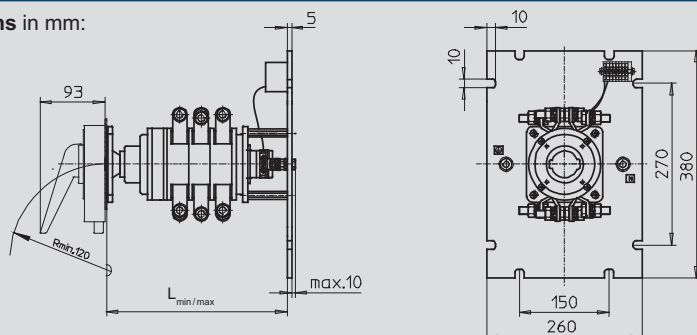

Switching programme

	L _{min}	L _{max}
41300 and 41400	200	227
41311, 41320, 41322, 41331, 41340, 41411, 41420	275	302
41600, 41611, 41620, 41622, 41631, 41640	292	319
41800	272	299



Four hole mounting 150 × 270 mm
Door interlock with mounting plate

160A

Changeover Switch ■

3 ... 4 pole

IP66 (front)
Four hole front mounting 48 × 48 mm

Order code structure:

Ordering example: 4 pole changeover, 160A, H-padlock device:

Type - Switching programme - Mounting form
K616 - 71400 - 484H1


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.		Poles	Auxiliary contacts			
			n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		3	0	0	0	0
71311		3	1	1	1	1
71322		3	2	0	2	0
71400		4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
484H1	H-padlock device silver/black	OFF position padlockable 12h

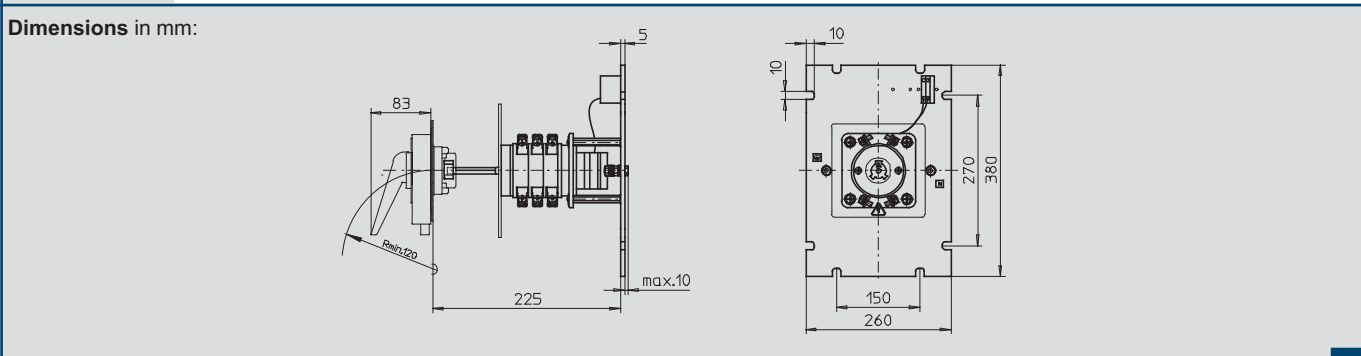

Four hole mounting 150 × 270 mm

Door interlock with mounting plate

315A

■ Changeover Switch

3 ... 4 pole

IP55 (front)

Four hole front mounting 104 × 104 mm



Order code structure:

Ordering example: 4 pole changeover, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 71400 - 484H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
484H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

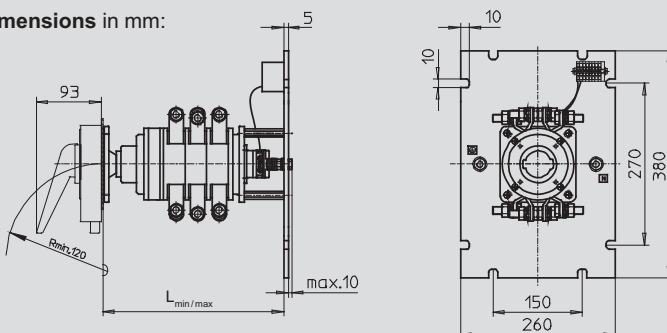

Switching programme

	L _{min}	L _{max}
71300, 71301, 71302, 71310, 71311, 71312, 71320, 71321, 71322	292	319
71400	272	299

Insulated enclosure

100 × 80 × 65 mm

20A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover security through screw cover



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H212 - 41400 - 077N4


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H212	20	5.5	3.7

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching diagram	
		n/o	n/c		
41300	3	0	0		
41400	4	0	0		

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
077N4		N-padlock device yellow/red	077N1		N-padlock device black
077M4		M-padlock device yellow/red	077M1		M-padlock device black
077V4		padlockable with V-handle yellow/red	077V1		padlockable with V-handle silver/black

Dimensions in mm:

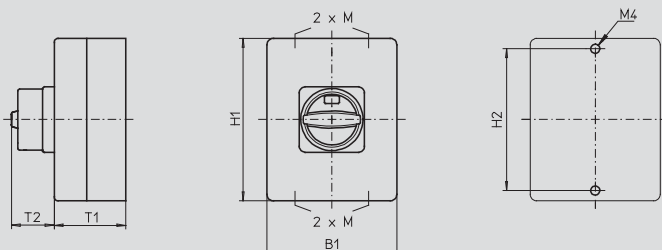

Mounting form	H1	B1	T1	T2	2×M	H2
077N4 / 077N1	100	80	65	38	20	90
077M4 / 077M1	100	80	65	38	20	90
077V4 / 077V1	100	80	65	32	20	90

Insulated enclosure

125 × 100 × 85 mm

20 A / 25 A / 32 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 25A, N-padlock device:

Type - Switching programme - Mounting form

H220 - 41400 - 700N4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
700N4		N-padlock device yellow/red	700N1		N-padlock device black
700M4		M-padlock device yellow/red	700M1		M-padlock device black
700V4		padlockable with V-handle yellow/red	700V1		padlockable with V-handle silver/black

Dimensions in mm:

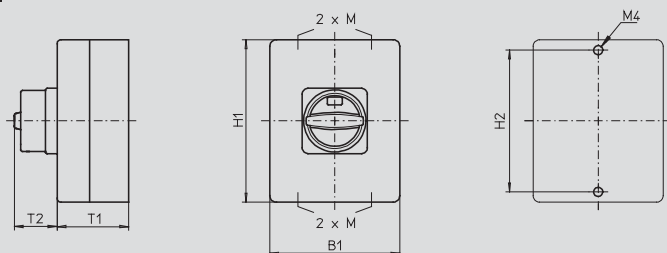

Mounting form	H1	B1	T1	T2	2×M	H2
700N4 / 700N1	125	100	85	33	20/25	115
700M4 / 700M1	125	100	85	38	20/25	115
700V4 / 700V1	125	100	85	32	20/25	115

Insulated enclosure

175 × 115 × 100 mm

20 A / 25 A / 32 A / 40 A / 63 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main Switch, 32A, M-padlock device:

Type - Switching programme - Mounting form

H226 - 41400 - 710M1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11
H263	63	22	18.5


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
710N4		N-padlock device yellow/red	710N1		N-padlock device black
710M4		M-padlock device yellow/red	710M1		M-padlock device black
710V4		padlockable with V-handle yellow/red	710V1		padlockable with V-handle silver/black

Dimensions in mm:

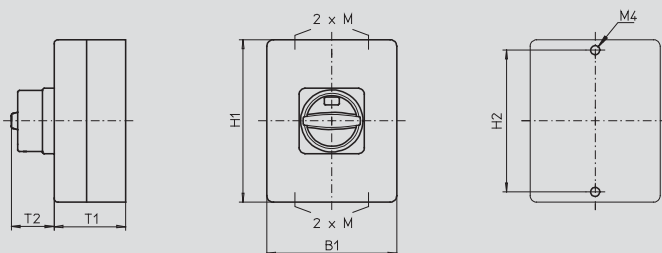

Mounting form	H1	B1	T1	T2	2×M	H2
710N4 / 710N1	175	115	100	33	20/25	165
710M4 / 710M1	175	115	100	38	20/25	165
710V4 / 710V1	175	115	100	39	20/25	165

Insulated enclosure

175 × 115 × 100 mm

20 A / 25 A / 32 A / 40 A

- Main/Emergency-Off Switch
- Main Switch

6 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 6 pole Main/Emergency-Off Switch, 20A, padlockable with V-handle:

Type - Switching programme - Mounting form

H216 - 41600 - 720V4


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching diagram
		n/o	n/c	
41600	6	0	0	

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
720N4		N-padlock device yellow/red	720N1		N-padlock device black
720M4		M-padlock device yellow/red	720M1		M-padlock device black
720V4		padlockable with V-handle yellow/red	720V1		padlockable with V-handle silver/black

Dimensions in mm:

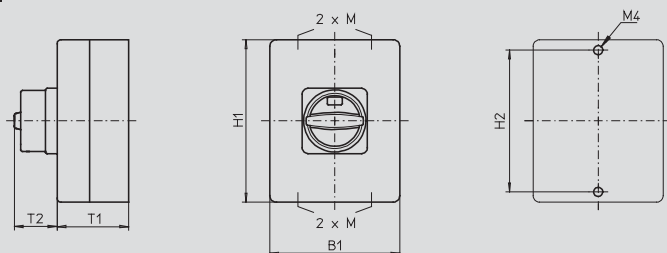

Mounting form	H1	B1	T1	T2	2×M	H2
720N4 / 720N1	175	115	100	33	20/25	165
720M4 / 720M1	175	115	100	38	20/25	165
720V4 / 720V1	175	115	100	39	20/25	165

Insulated enclosure

250 × 160 × 95 mm

20 A / 25 A / 32 A / 40 A

Main/Emergency-Off Switch ■
Main Switch ■

6 ... 8 pole

IP66

Insulated polycarbonate enclosure



Order code structure:

Ordering example: 8 pole Main Switch, 40A, N-padlock device:

Type - Switching programme - Mounting form

H233 - 41800 - 477N1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes (6 ... 8 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
477N4		N-padlock device yellow/red	477N1		N-padlock device black
477M4		M-padlock device yellow/red	477M1		M-padlock device black
477V4		padlockable with V-handle yellow/red	477V1		padlockable with V-handle silver/black

Dimensions in mm:

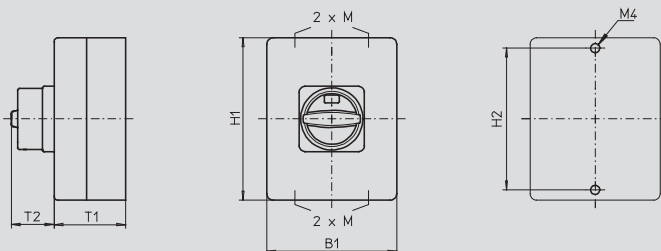

Mounting form	H1	B1	T1	T2	2×M	H2
477N4 / 477N1	250	160	95	33	25/32	240
477M4 / 477M1	250	160	95	38	25/32	240
477V4 / 477V1	250	160	95	39	25/32	240

Insulated enclosure

250 × 160 × 95 mm

63 A / 80 A / 100 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 80 A, M-padlock device:

Type - Switching programme - Mounting form

H408 - 41300 - 177M4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
177N4		N-padlock device yellow/red	177N1		N-padlock device black
177M4		M-padlock device yellow/red	177M1		M-padlock device black

Dimensions in mm:

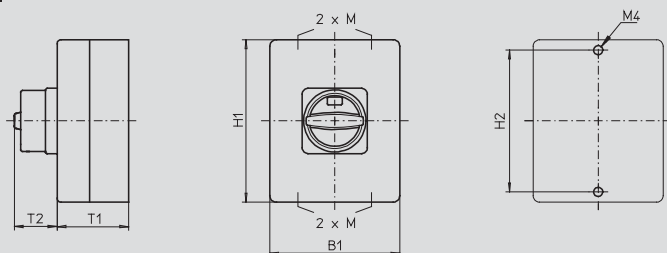

Mounting form	H1	B1	T1	T2	2×M	H2
177N4 / 177N1	250	160	95	45	25/32	240
177M4 / 177M1	250	160	95	50	25/32	240

Insulated enclosure

250 × 160 × 95 mm

20 A / 25 A / 32 A / 40 A

Changeover Switch ■

3 ... 4 pole

IP66

Insulated polycarbonate enclosure



Order code structure:

Ordering example: 3 pole Changeover Switch, 40 A, padlockable with V-handle:

Type - Switching programme - Mounting form

H233 - 71300 - 476V1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		 n/o pos. 1	 n/c pos. 1	 n/o pos. 2	 n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
478M1	 M-handle silver/black	not padlockable
476V1	 padlockable with V-handle silver/black	OFF position padlockable 12h
478V1	 padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

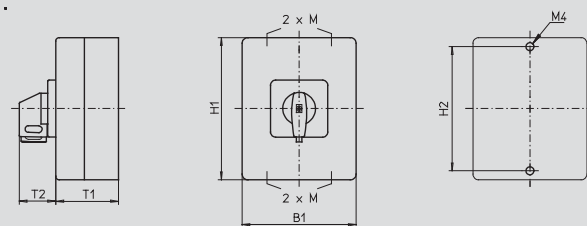

Mounting form	H1	B1	T1	T2	2×M	H2
478M1/476V1/478V1	250	160	95	39	25/32	240

Insulated enclosure

320 × 220 × 180 mm

63 A / 80 A / 100 A / 125 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 125A, N-padlock device:

Type - Switching programme - Mounting form

H412 - 41400 - 471N4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
471N4		N-padlock device yellow/red	471N1		N-padlock device black
471M4		M-padlock device yellow/red	471M1		M-padlock device black

Dimensions in mm:

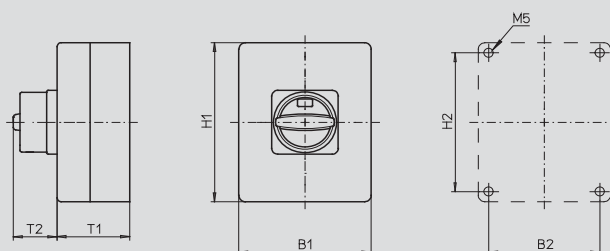

Mounting form	H1	B1	T1	T2	H2	B2
471N4 / 471N1	320	220	180	45	293	193
471M4 / 471M1	320	220	180	50	293	193

Blank gland plates

Insulated enclosure

320 × 220 × 180 mm

63 A / 80 A / 100 A / 125 A

Main/Emergency-Off Switch ■
Main Switch ■

6 ... 8 pole

IP66

Insulated polycarbonate enclosure
 Cover interlock in ON position



Order code structure:

Ordering example: 6 pole Main Switch, 63A, M-padlock device:

Type - Switching programme - Mounting form

H406 - 41600 - 977M1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes (6 ... 8 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
977N4		N-padlock device yellow/red	977N1		N-padlock device black
977M4		M-padlock device yellow/red	977M1		M-padlock device black

Dimensions in mm:

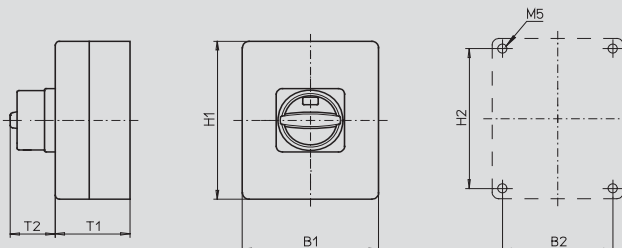

Mounting form	H1	B1	T1	T2	H2	B2
977N4 / 977N1	320	220	180	45	293	193
977M4 / 977M1	320	220	180	50	293	193

Blank gland plates

Insulated enclosure

320 × 220 × 180 mm

63A / 80A / 100A / 125A

■ Changeover Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 4 pole Changeover Switch, 100A, H-padlock device:

Type - Switching programme - Mounting form

H410 - 71400 - 976H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
976M1	 M-handle silver/black	not padlockable
976H1	 H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

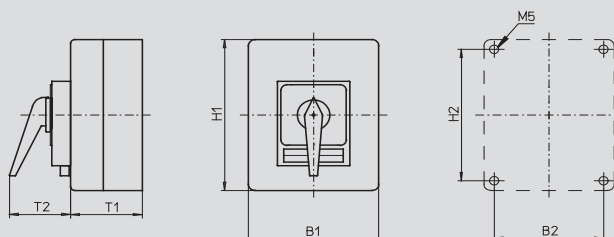

Mounting form	H1	B1	T1	T2	H2	B2
976M1	320	220	180	52	293	193
976H1	320	220	180	83	293	193

Blank gland plates

Insulated enclosure

440 × 320 × 180 mm

63 A / 80 A / 100 A / 125 A

Main/Emergency-Off Switch ■
Main Switch ■

6 ... 8 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 8 pole Main Switch, 100A, M-padlock device:

Type - Switching programme - Mounting form

H410 - 41800 - 577M1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes (6 ... 8 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
577N4		N-padlock device yellow/red	577N1		N-padlock device black
577M4		M-padlock device yellow/red	577M1		M-padlock device black

Dimensions in mm:

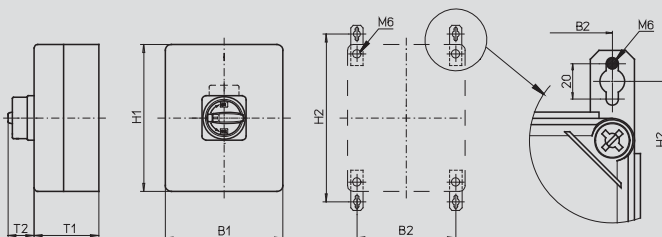

Mounting form	H1	B1	T1	T2	H2	B2
577N4/577N1	440	320	180	45	480	293
577M4/577M1	440	320	180	50	480	293

Blank gland plates

Insulated enclosure

440 × 320 × 180 mm

160A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 3 pole Main Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 41300 - 077H1


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching diagram	
		n/o	n/c		
41300	3	0	0		
41400	4	0	0		

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
077H4		H-padlock device yellow/red	077H1		H-padlock device silver/black

Dimensions in mm:

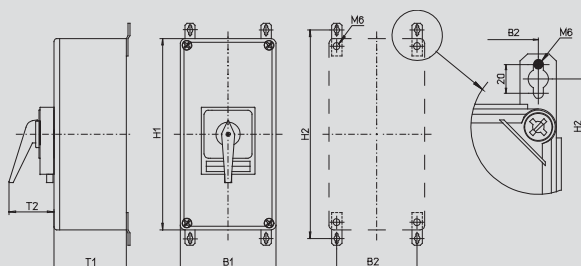

Type	H1	H2	B1	B2	T1	T2
K616	440	480	320	293	180	83

Blank gland plates

Insulated enclosure

440 × 320 × 180 mm

63 A / 80 A / 100 A / 125 A

Changeover Switch ■

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 4 pole Changeover Switch, 125A, H-padlock device:

Type - Switching programme - Mounting form

H412 - 71400 - 576H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
576M1	M-handle silver/black	not padlockable
576H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

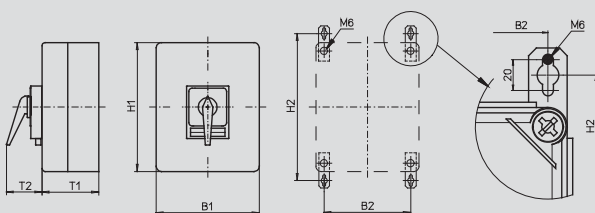

Mounting form	H1	B1	T1	T2	H2	B2
576M1	440	320	180	52	480	293
576H1	440	320	180	83	480	293

Blank gland plates

Insulated enclosure

440 × 320 × 255 mm

160A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 8 pole Main/Emergency-Off Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 41800 - 177H4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41311	3	1	1
41320	3	2	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
177H4		H-padlock device yellow/red

Mounting form	Operator	Main Switch
177H1		H-padlock device silver/black

Dimensions in mm:

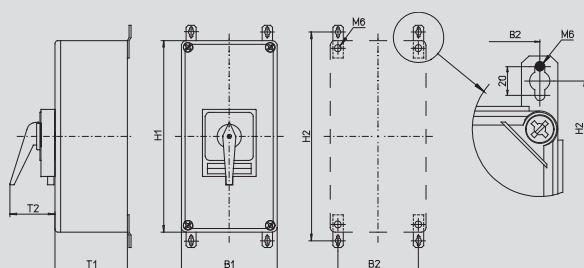

Type	H1	H2	B1	B2	T1	T2
K616	440	480	320	293	255	83

Blank gland plates

Insulated enclosure

440 × 320 × 255 mm

160A

Changeover Switch ■

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 3 pole Changeover Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 71300 - 176H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45


Detailed technical data page 108.

Switching progr.		Poles 	Auxiliary contacts			
			n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		3	0	0	0	0
71311		3	1	1	1	1
71322		3	2	0	2	0
71400		4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
176H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

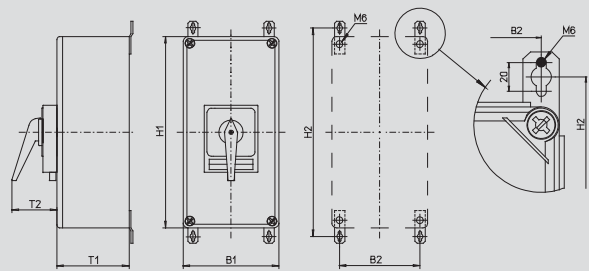

Type	H1	H2	B1	B2	T1	T2
K616	440	480	320	293	255	83

Blank gland plates

Insulated enclosure

640 × 320 × 255 mm

315A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 41400 - 077H1


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching diagram	
		n/o	n/c		
41300	3	0	0		
41400	4	0	0		

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
077H4		H-padlock device yellow/red	077H1		H-padlock device silver/black

Dimensions in mm:

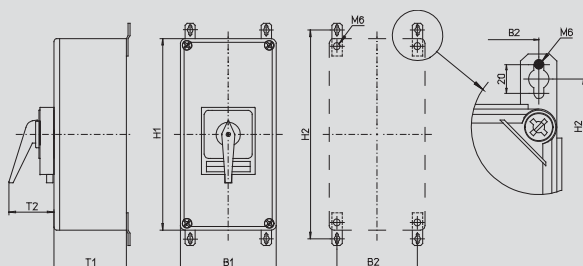

Type	H1	H2	B1	B2	T1	T2
K830	640	680	320	293	255	93

Blank gland plates

Insulated enclosure

640 × 320 × 330 mm

315A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 6 pole Main/Emergency-Off Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 41600 - 177H4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41311	3	1	1
41320	3	2	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
177H4		H-padlock device yellow/red

Mounting form	Operator	Main Switch
177H1		H-padlock device silver/black

Dimensions in mm:

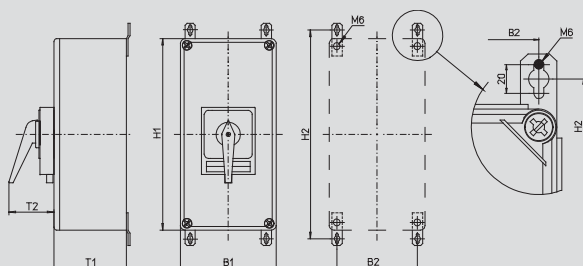

Type	H1	H2	B1	B2	T1	T2
K830	640	680	320	293	330	93

Blank gland plates

Insulated enclosure

640 × 320 × 330 mm

315A

■ Changeover Switch

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 3 pole Changeover Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 71300 - 176H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
176H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

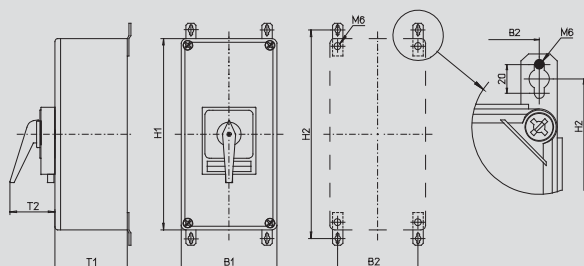

Type	H1	H2	B1	B2	T1	T2
K830	640	680	320	293	330	93

Blank gland plates

Mild steel enclosure

150 × 150 × 120 mm

20A / 25A / 32A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H216 - 41400 - 087N4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
087N4		N-padlock device yellow/red	087N1		N-padlock device black
087M4		M-padlock device yellow/red	087M1		M-padlock device black
087V4		padlockable with V-handle yellow/red	087V1		padlockable with V-handle silver/black

Dimensions in mm:



Mounting form	H1	B1	T1	T2	H2	B2
087N4 / 087N1	150	150	120	33	132	85
087M4 / 087M1	150	150	120	38	132	85
087V4 / 087V1	150	150	120	39	132	85

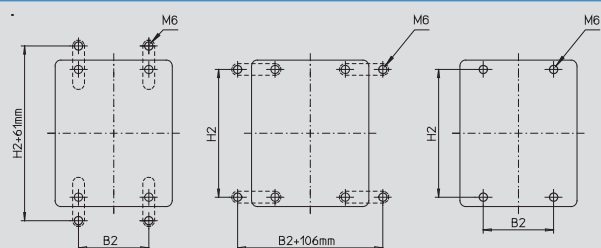

Blank side walls

Mounting brackets see page 105.

Mild steel enclosure

200 × 150 × 120 mm

20 A / 25 A / 32 A / 40 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 3 pole Main Switch, 32A, M-padlock device:

Type - Switching programme - Mounting form

H226 - 41300 - 187M1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.


Mounting form	Operator	Main/Emergency-Off Switch
187N4		N-padlock device yellow/red
187M4		M-padlock device yellow/red
187V4		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
187N1		N-padlock device black
187M1		M-padlock device black
187V1		padlockable with V-handle silver/black

Dimensions in mm:



Mounting form	H1	B1	T1	T2	H2	B2
187N4 / 187N1	200	150	120	33	182	85
187M4 / 187M1	200	150	120	38	182	85
187V4 / 187V1	200	150	120	39	182	85

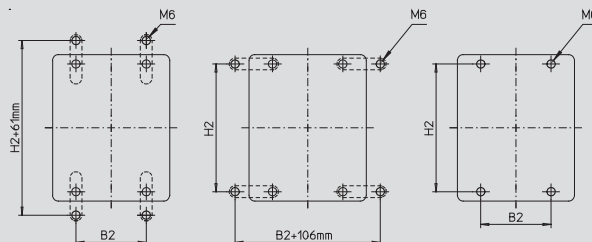

Blank side walls

Mounting brackets see page 105.

Mild steel enclosure

200 × 150 × 120 mm

63 A / 80 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 63A, M-padlock device:

Type - Switching programme - Mounting form

H406 - 41300 - 987M4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0



Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
46300	3	0	0 (with N-terminal)
46311	3	1	1 (with N-terminal)
46320	3	2	0 (with N-terminal)

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch
987N4		N-padlock device yellow/red
987M4		M-padlock device yellow/red

Mounting form	Operator	Main Switch
987N1		N-padlock device black
987M1		M-padlock device black

Dimensions in mm:

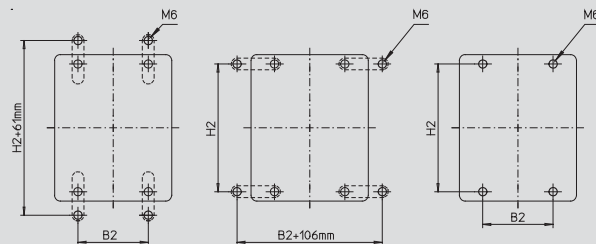

Mounting form	H1	B1	T1	T2	H2	B2
987N4 / 987N1	200	150	120	45	182	85
987M4 / 987M1	200	150	120	50	182	85

Blank side walls

Mounting brackets see page 105.

Mild steel enclosure

200 × 150 × 120 mm

20 A / 25 A / 32 A / 40 A

■ Changeover Switch

3 ... 4 pole

IP66

Powder coated mild steel enclosure

Cover interlock in position 1 and 2



Order code structure:

Ordering example: 3 pole Changeover Switch, 20 A, padlockable with V-handle:

Type - Switching programme - Mounting form

H216 - 71300 - 188V1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11



Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
188M1		M-handle silver/black	not padlockable
186V1		padlockable with V-handle silver/black	OFF position padlockable 12h
188V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

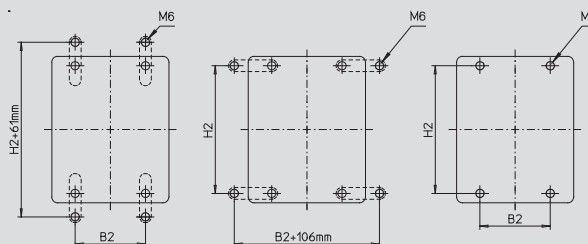

Mounting form	H1	B1	T1	T2	H2	B2
188M1/186V1/188V1	200	150	120	39	182	85

Blank side walls

Mounting brackets see page 105.

Mild steel enclosure

300 × 250 × 150 mm

63 A / 80 A / 100 A / 125 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main Switch, 80A, N-padlock device:

Type - Switching programme - Mounting form

H408 - 41400 - 187N1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0



Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
187N4		N-padlock device yellow/red
187M4		M-padlock device yellow/red

Mounting form	Operator	Main Switch
187N1		N-padlock device black
187M1		M-padlock device black

Dimensions in mm:

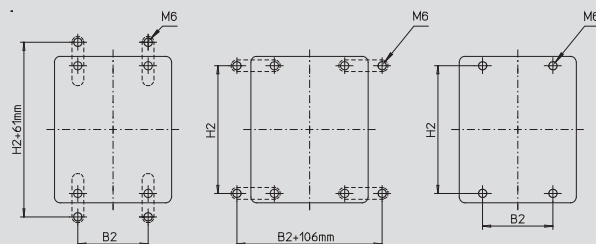

Mounting form	H1	B1	T1	T2	H2	B2
187N4 / 187N1	300	250	150	45	282	185
187M4 / 187M1	300	250	150	50	282	185

Blank side walls

Mounting brackets see page 105.

Mild steel enclosure

300 × 250 × 150 mm

63A / 80A / 100A / 125A

■ Changeover Switch

3 ... 4 pole

IP66

Powder coated mild steel enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 4 pole Changeover Switch, 80 A, H-padlock device:

Type - Switching programme - Mounting form

H408 - 71400 - 186H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37



Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
186M1	 M-handle silver/black	not padlockable
186H1	 H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

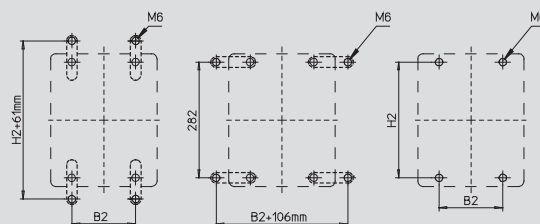

Mounting form	H1	B1	T1	T2	H2	B2
186M1	300	250	150	52	282	185
186H1	300	250	150	83	282	185

Blank side walls

Mounting brackets see page 105.

Mild steel enclosure

500 × 400 × 300 mm

160A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 41300 - 187H4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
187H4		H-padlock device yellow/red

Mounting form	Operator	Main Switch
187H1		H-padlock device silver/black

Dimensions in mm:

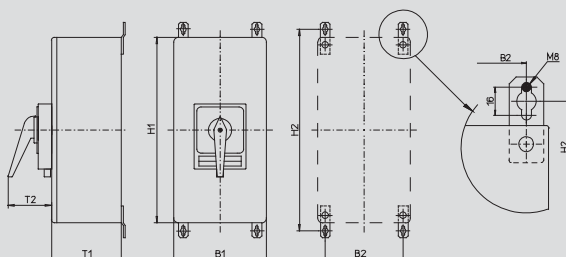

Type	H1	H2	B1	B2	T1	T2
K616	500	545	400	360	300	83

Blank gland plate

Mild steel enclosure

500 × 400 × 300 mm

160A

■ Changeover Switch

3 ... 4 pole

IP66

Powder coated mild steel enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 3 pole Changeover Switch, 160A, H-padlock device:

Type - Switching programme - Mounting form

K616 - 71300 - 186H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K616	160	75	45


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
186H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

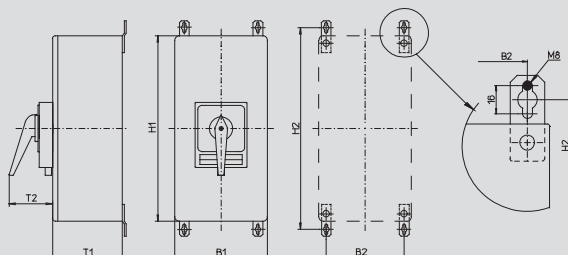

Type	H1	H2	B1	B2	T1	T2
K616	500	545	400	360	300	83

Blank gland plate

Mild steel enclosure

600 × 400 × 300 mm

315A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 41400 - 187H4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
187H4		H-padlock device yellow/red

Mounting form	Operator	Main Switch
187H1		H-padlock device silver/black

Dimensions in mm:

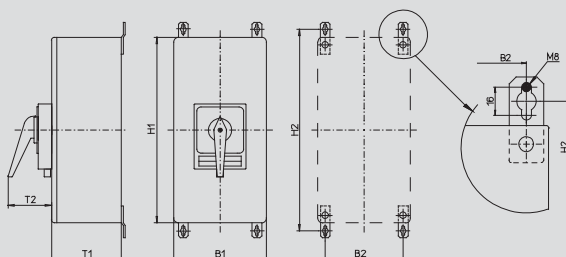

Type	H1	H2	B1	B2	T1	T2
K830	600	645	400	360	300	93

Blank gland plate

Mild steel enclosure

600 × 400 × 300 mm

315A

■ Changeover Switch

3 ... 4 pole

IP66

Powder coated mild steel enclosure
Cover interlock in position 1 and 2



Order code structure:

Ordering example: 4 pole Changeover Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 71400 - 186H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
186H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

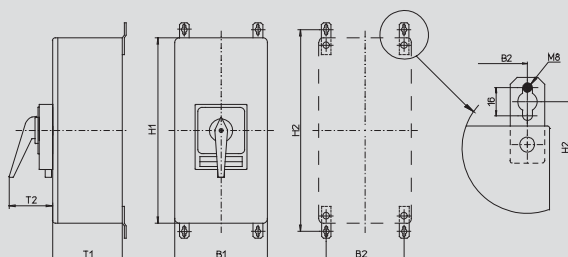

Type	H1	H2	B1	B2	T1	T2
K830	600	645	400	360	300	93

Blank gland plate

Mild steel enclosure

800 × 400 × 300 mm

315A

Main/Emergency-Off Switch ■
Main Switch ■

6 ... 8 pole

IP66

Powder coated mild steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 8 pole Main Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 41800 - 287H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
287H4		H-padlock device yellow/red	287H1		H-padlock device silver/black

Dimensions in mm:

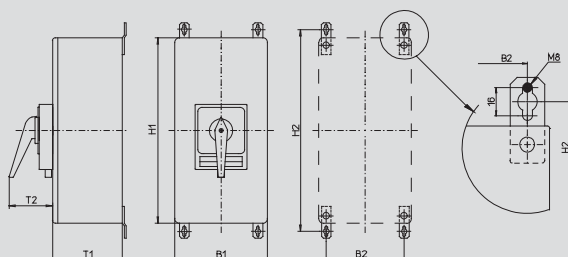

Type	H1	H2	B1	B2	T1	T2
K830	800	845	400	360	300	93

Blank gland plate

Mild steel enclosure

800 × 400 × 300 mm

315A

■ Changeover Switch

3 ... 4 pole

IP66

Powder coated mild steel enclosure

Cover interlock in position 1 and 2



Order code structure:

Ordering example: 4 pole Changeover Switch, 315A, H-padlock device:

Type - Switching programme - Mounting form

K830 - 71400 - 286H1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
K830	315	132	55


Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
286H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

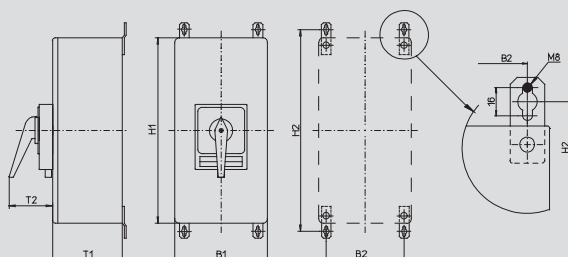

Type	H1	H2	B1	B2	T1	T2
K830	800	845	400	360	300	93

Blank gland plate

Stainless steel enclosure

150 × 150 × 120 mm

20A / 25A / 32A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Brushed stainless steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 25A, N-padlock device:

Type - Switching programme - Mounting form

H220 - 41300 - 097N4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
097N4		N-padlock device yellow/red	097N1		N-padlock device black
097M4		M-padlock device yellow/red	097M1		M-padlock device black
097V4		padlockable with V-handle yellow/red	097V1		padlockable with V-handle silver/black

Dimensions in mm:



Mounting form	H1	B1	T1	T2	H2	B2
097N4 / 097N1	150	150	120	33	132	85
097M4 / 097M1	150	150	120	38	132	85
097V4 / 097V1	150	150	120	39	132	85

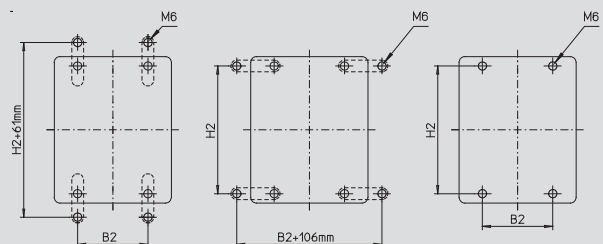

Blank side walls

Mounting brackets see page 105.

Stainless steel enclosure

200 × 150 × 120 mm

20 A / 25 A / 32 A / 40 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 8 pole

IP66

Brushed stainless steel enclosure

Cover interlock in ON position



Order code structure:

Ordering example: 6 pole Main Switch, 32A, M-padlock device:

Type - Switching programme - Mounting form

H226 - 41600 - 197M1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0


Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.


Mounting form	Operator	Main/Emergency-Off Switch
197N4		N-padlock device yellow/red
197M4		M-padlock device yellow/red
197V4		padlockable with V-handle yellow/red

Mounting form	Operator	Main Switch
197N1		N-padlock device black
197M1		M-padlock device black
197V1		padlockable with V-handle silver/black

Dimensions in mm:



Mounting form	H1	B1	T1	T2	H2	B2
197N4 / 197N1	200	150	120	33	182	85
197M4 / 197M1	200	150	120	38	182	85
197V4 / 197V1	200	150	120	39	182	85

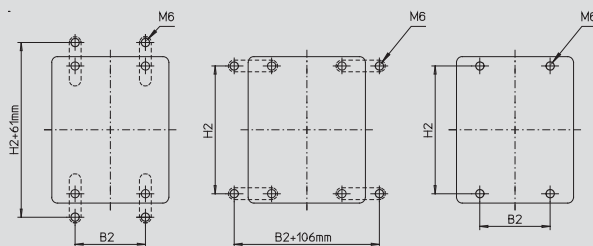

Blank side walls

Mounting brackets see page 105.

Stainless steel enclosure

200 × 150 × 120 mm

63 A / 80 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Brushed stainless steel enclosure
 Cover interlock in ON position



Order code structure:

Ordering example: 3 pole Main/Emergency-Off Switch, 63A, M-padlock device:

Type - Switching programme - Mounting form

H406 - 41300 - 997M4

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
46300	3	0	0 (with N-terminal)
46311	3	1	1 (with N-terminal)
46320	3	2	0 (with N-terminal)

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch
997N4		N-padlock device yellow/red
997M4		M-padlock device yellow/red

Mounting form	Operator	Main Switch
997N1		N-padlock device black
997M1		M-padlock device black

Dimensions in mm:

Mounting form	H1	B1	T1	T2	H2	B2
997N4 / 997N1	200	150	120	45	182	85
997M4 / 997M1	200	150	120	50	182	85

Blank side walls

Mounting brackets see page 105.

Stainless steel enclosure

200 × 150 × 120 mm

20A / 25A / 32A / 40A

Changeover Switch

3 ... 4 pole

IP66

Brushed stainless steel enclosure

Cover interlock in position 1 and 2



Order code structure:

Ordering example: 3 pole Changeover Switch, 20A, padlockable with V-handle:

Type - Switching programme - Mounting form

H216 - 71300 - 198V1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11


Detailed technical data page 108.

Switching progr.	Poles I I	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300		0	0	0	0
71311		1	1	1	1
71322		2	0	2	0
71400		0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator		Padlockable options
198M1		M-handle silver/black	not padlockable
196V1		padlockable with V-handle silver/black	OFF position padlockable 12h
198V1		padlockable with V-handle silver/black	3 positions padlockable (09h/12h/03h)

Dimensions in mm:

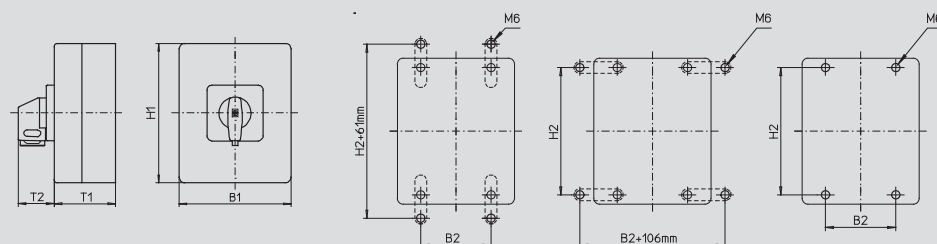

Mounting form	H1	B1	T1	T2	H2	B2
196V1 / 198V1 / 198M1	200	150	120	39	182	85

Blank side walls
Mounting brackets see page 105.

Stainless steel enclosure

300 × 250 × 150 mm

63 A / 80 A / 100 A / 125 A

Main/Emergency-Off Switch ■
Main Switch ■

3 ... 8 pole

IP66

Brushed stainless steel enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 4 pole Main Switch, 80A, M-padlock device:

Type - Switching programme - Mounting form

H408 - 41400 - 197M1

Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
3 ... 4 pole:		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0



Switching progr.	Poles	Auxiliary contacts	
6 ... 8 pole:		n/o	n/c
41600	6	0	0
41611	6	1	1
41620	6	2	0
41800	8	0	0

Switching diagrams and further switching programmes page 95.

Mounting form	Operator	Main/Emergency-Off Switch
197N4		N-padlock device yellow/red
197M4		M-padlock device yellow/red

Mounting form	Operator	Main Switch
197N1		N-padlock device black
197M1		M-padlock device black

Dimensions in mm:

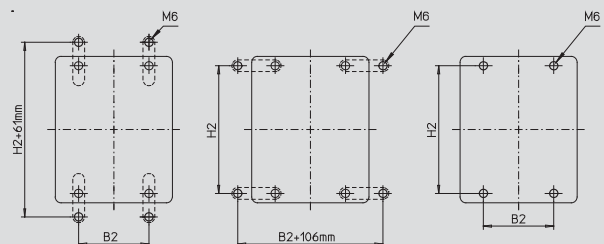

Mounting form	H1	B1	T1	T2	H2	B2
197N4 / 197N1	300	250	150	45	282	185
197M4 / 197M1	300	250	150	50	282	185

Blank side walls
Mounting brackets see page 105.

Stainless steel enclosure

300 × 250 × 150 mm

63A / 80A / 100A / 125A

Changeover Switch

3 ... 4 pole

IP66

Brushed stainless steel enclosure

Cover interlock in position 1 and 2



Order code structure:

Ordering example: 3 pole Changeover Switch, 63A, H-padlock device:

Type - Switching programme - Mounting form

H406 - 71300 - 196H1

Type	Rated data (IEC 60947)		
	Operational current I_e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H406	63	22	18.5
H408	80	30	22
H410	100	37	30
H412	125	45	37



Detailed technical data page 108.

Switching progr.	Poles 	Auxiliary contacts			
		n/o pos. 1	n/c pos. 1	n/o pos. 2	n/c pos. 2
71300	3	0	0	0	0
71311	3	1	1	1	1
71322	3	2	0	2	0
71400	4	0	0	0	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Padlockable options
196M1	M-handle silver/black	not padlockable
196H1	H-padlock device silver/black	OFF position padlockable 12h

Dimensions in mm:

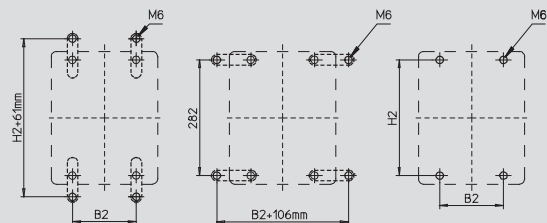

Mounting form	H1	B1	T1	T2	H2	B2
196M1	300	250	150	52	282	185
196H1	300	250	150	83	282	185

Blank side walls

Mounting brackets see page 105.

Switching diagrams 41300–41420

41300	1/L1 3/L2 5/L3
	2/T1 4/T2 6/T3
SMD	41300

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41300
3 pole without auxiliary contacts

41311	1/L1 3/L2 5/L3	21 13
	2/T1 4/T2 6/T3	22 14
SMD	41300	MB

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41311
3 pole with 2 auxiliary contacts
1 n/o late make/early break + 1 n/c

41320	1/L1 3/L2 5/L3	33 43
	2/T1 4/T2 6/T3	34 44
SMD	41300	MD

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41320
3 pole with 2 auxiliary contacts
2 n/o late make/early break

41322	24 32	1/L1 3/L2 5/L3	21 13
	23 31	2/T1 4/T2 6/T3	22 14
SMD	MC	41300	MB

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41322
3 pole with 4 auxiliary contacts
2 n/o late make/early break + 2 n/c

41331	44 34	1/L1 3/L2 5/L3	21 13
	43 33	2/T1 4/T2 6/T3	22 14
SMD	MD	41300	MB

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41331
3 pole with 4 auxiliary contacts
3 n/o late make/early break + 1 n/c

41340	64 54	1/L1 3/L2 5/L3	33 43
	63 53	2/T1 4/T2 6/T3	34 44
SMD	ME	41300	MD

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41340
3 pole with 4 auxiliary contacts
4 n/o late make/early break

41400	1/L1	3/L2	5/L3	N
				
	2/T1	4/T2	6/T3	N
SMD	41300			MA

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41400
4 pole without auxiliary contacts
neutral contact early make/late break

41411	14	22	1/L1	3/L2	5/L3	N
	13	21	2/T1	4/T2	6/T3	N
SMD	MB		41300			MA

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41411
4 pole with 2 auxiliary contacts
1 n/o late make/early break + 1 n/c
neutral contact early make/late break

41420	44	34	1/L1	3/L2	5/L3	N
						
	43	33	2/T1	4/T2	6/T3	N
SMD	MD		41300			MA

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41420
4 pole with 2 auxiliary contacts
2 n/o late make/early break
neutral contact early make/late break

Switching diagrams 41600–46300

41600	1L1	1L2	1L3	2L1	2L2	2L3
SMD	41600					

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41600
6 pole without auxiliary contacts

41611	1L1	1L2	1L3	2L1	2L2	2L3	21	13
SMD	41600						MB	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41611
6 pole with 2 auxiliary contacts
1 n/o late make/early break + 1 n/c

41620	1L1	1L2	1L3	2L1	2L2	2L3	33	43
SMD	41600						MD	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41620
6 pole with 2 auxiliary contacts
2 n/o late make/early break

41622	24	32	1L1	1L2	1L3	2L1	2L2	2L3	21	13
SMD	MC		41600						MB	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41622
6 pole with 4 auxiliary contacts
2 n/o late make/early break + 2 n/c

41631	44	34	1L1	1L2	1L3	2L1	2L2	2L3	21	13
SMD	MD		41600						MB	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41631
6 pole with 4 auxiliary contacts
3 n/o late make/early break + 1 n/c

41640	64	54	1L1	1L2	1L3	2L1	2L2	2L3	33	43
SMD	ME		41600						MD	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41640
6 pole with 4 auxiliary contacts
4 n/o late make/early break

41800	N	1L1	1L2	1L3	2L1	2L2	2L3	N
SMD	MA	41600						MA

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 41800
8 pole without auxiliary contacts
2 neutral contacts early make/late break

45300	PE	1/L1	3/L2	5/L3	N
SMD	MG	41300			MF

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 45300
3 pole without auxiliary contacts
with N and PE-terminals

46300	1/L1	3/L2	5/L3	N
SMD	41300			MF

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches
Switching programme 46300
3 pole without auxiliary contacts
with N-terminal

Switching diagrams 46311–71202

46311	14	22	1/L1	3/L2	5/L3	N
						
SMD	13	21	2/T1	4/T2	6/T3	N
	MB		41300		MF	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches

Switching programme 46311

3 pole with 2 auxiliary contacts

1 n/o late make/early break + 1 n/c

with N-terminal

46320	44	34	1/L1	3/L2	5/L3	N
						
SMD	43	33	2/T1	4/T2	6/T3	N
	MD		41300		MF	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches

Switching programme 46320

3 pole with 2 auxiliary contacts

2 n/o late make/early break

with N-terminal

47300	1/L1	3/L2	5/L3	PE
				
SMD	2/T1	4/T2	6/T3	PE
	41300		MG	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches

Switching programme 47300

3 pole without auxiliary contacts

with PE-terminal

47311	14	22	1/L1	3/L2	5/L3	PE
						
SMD	13	21	2/T1	4/T2	6/T3	PE
	MB		41300		MG	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches

Switching programme 47311

3 pole with 2 auxiliary contacts

1 n/o late make/early break + 1 n/c

with PE-terminal

47320	44	34	1/L1	3/L2	5/L3	PE
						
SMD	43	33	2/T1	4/T2	6/T3	PE
	MD		41300		MG	

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches

Switching programme 47320

3 pole with 2 auxiliary contacts

2 n/o late make/early break

with PE-terminal

47400	N	1/L1	3/L2	5/L3	PE
					
SMD	N	2/T1	4/T2	6/T3	PE
	MA		41300		MG

Main/Emergency-Off Switches · Main Switches · ON-OFF Switches

Switching programme 47400

4 pole without auxiliary contacts

neutral contact early make/late break

with PE-terminal

71200	1/L1	1/L2	1/L3	2/L1	2/L2	2/L3
						
SMD	1/T1	1/T2	1/T3	2/T1	2/T2	2/T3
			71200			

Changeover Switches

Switching programme 71200

2 pole without auxiliary contacts

71201	1/L1	1/L2	1/L3	2/L1	2/L2	2/L3	21	13
								
SMD	1/T1	1/T2	1/T3	2/T1	2/T2	2/T3	22	14
			71200				MB	2

Changeover Switches

Switching programme 71201

2 pole with 2 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 2

71202	1/L1	1/L2	1/L3	2/L1	2/L2	2/L3	33	43
								
SMD	1/T1	1/T2	1/T3	2/T1	2/T2	2/T3	34	44
			71200				MD	2

Changeover Switches

Switching programme 71202

2 pole with 2 auxiliary contacts

2 n/o late make/early break in position 2

Switching diagrams 71210–71302

71210	14	22	1L1	1L2	1L3	2L1	2L2	2L3
	Stellung/Position							
	13	21	1T1	1T2	1T3	2T1	2T2	2T3
SMD	1	MB	71200					

Changeover Switches

Switching programme 71210

2 pole with 2 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 1

71211	14	22	1L1	1L2	1L3	2L1	2L2	2L3	31	23
	Stellung/Position								Stellung/Position	
	13	21	1T1	1T2	1T3	2T1	2T2	2T3	32	24
SMD	1	MB	71200						MC	2

Changeover Switches

Switching programme 71211

2 pole with 4 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 1

1 n/o late make/early break + 1 n/c in position 2

71212	14	22	1L1	1L2	1L3	2L1	2L2	2L3	33	43
	Stellung/Position								Stellung/Position	
	13	21	1T1	1T2	1T3	2T1	2T2	2T3	34	44
SMD	1	MB	71200						MD	2

Changeover Switches

Switching programme 71212

2 pole with 4 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 1

2 n/o late make/early break in position 2

71220	44	34	1L1	1L2	1L3	2L1	2L2	2L3
	Stellung/Position							
	43	33	1T1	1T2	1T3	2T1	2T2	2T3
SMD	1	MD	71200					

Changeover Switches

Switching programme 71220

2 pole with 2 auxiliary contacts

2 n/o late make/early break in position 1

71221	44	34	1L1	1L2	1L3	2L1	2L2	2L3	21	13
	Stellung/Position								Stellung/Position	
	43	33	1T1	1T2	1T3	2T1	2T2	2T3	22	14
SMD	1	MD	71200						MB	2

Changeover Switches

Switching programme 71221

2 pole with 4 auxiliary contacts

2 n/o late make/early break in position 1

1 n/o late make/early break + 1 n/c in position 2

71222	44	34	1L1	1L2	1L3	2L1	2L2	2L3	53	63
	Stellung/Position								Stellung/Position	
	43	33	1T1	1T2	1T3	2T1	2T2	2T3	54	64
SMD	1	MD	71200						ME	2

Changeover Switches

Switching programme 71222

2 pole with 4 auxiliary contacts

2 n/o late make/early break in position 1

2 n/o late make/early break in position 2

71300	1L1	1L2	1L3	2L1	2L2	2L3
	1T1	1T2	1T3	2T1	2T2	2T3
SMD	71300					

Changeover Switches

Switching programme 71300

3 pole without auxiliary contacts

71301	1L1	1L2	1L3	2L1	2L2	2L3	21	13
							Stellung/Position	
	1T1	1T2	1T3	2T1	2T2	2T3	22	14
SMD	71300						MB	2

Changeover Switches

Switching programme 71301

3 pole with 2 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 2

71302	1L1	1L2	1L3	2L1	2L2	2L3	33	43
							Stellung/Position	
	1T1	1T2	1T3	2T1	2T2	2T3	34	44
SMD	71300						MD	2

Changeover Switches

Switching programme 71302

3 pole with 2 auxiliary contacts

2 n/o late make/early break in position 2

Switching diagrams 71310–71400

71310		14	22	1L1 1L2 1L3 2L1 2L2 2L3
	Stellung/Position			
		13	21	1T1 1T2 1T3 2T1 2T2 2T3
SMD	1	MB		71300

Changeover Switches

Switching programme 71310

3 pole with 2 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 1

71311		14	22	1L1 1L2 1L3 2L1 2L2 2L3	31	23
	Stellung/Position					
		13	21	1T1 1T2 1T3 2T1 2T2 2T3	32	24
SMD	1	MB		71300	MC	2

Changeover Switches

Switching programme 71311

3 pole with 4 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 1

1 n/o late make/early break + 1 n/c in position 2

71312		14	22	1L1 1L2 1L3 2L1 2L2 2L3	33	43
	Stellung/Position					
		13	21	1T1 1T2 1T3 2T1 2T2 2T3	34	44
SMD	1	MB		71300	MD	2


Changeover Switches

Switching programme 71312

3 pole with 4 auxiliary contacts

1 n/o late make/early break + 1 n/c in position 1

2 n/o late make/early break in position 2


71320		44	34	1L1 1L2 1L3 2L1 2L2 2L3
	Stellung/Position			
		43	33	1T1 1T2 1T3 2T1 2T2 2T3
SMD	1	MD		71300

Changeover Switches

Switching programme 71320

3 pole with 2 auxiliary contacts

2 n/o late make/early break in position 1

71321		44	34	1L1 1L2 1L3 2L1 2L2 2L3	21	13
	Stellung/Position					
		43	33	1T1 1T2 1T3 2T1 2T2 2T3	22	14
SMD	1	MD		71300	MB	2


Changeover Switches

Switching programme 71321

3 pole with 4 auxiliary contacts

2 n/o late make/early break in position 1

1 n/o late make/early break + 1 n/c in position 2

71322		44	34	1L1 1L2 1L3 2L1 2L2 2L3	53	63
	Stellung/Position					
		43	33	1T1 1T2 1T3 2T1 2T2 2T3	54	64
SMD	1	MD		71300	ME	2

Changeover Switches

Switching programme 71322

3 pole with 4 auxiliary contacts

2 n/o late make/early break in position 1

2 n/o late make/early break in position 2

71400	N	1L1 1L2 1L3 2L1 2L2 2L3	N
			
	N	1T1 1T2 1T3 2T1 2T2 2T3	N
SMD	MA	71300	MA


Changeover Switches

Switching programme 71400

4 pole without auxiliary contacts







neutral contact early make/late break

Additional modules for later attachment to switches 41300 / 41600 / 71300

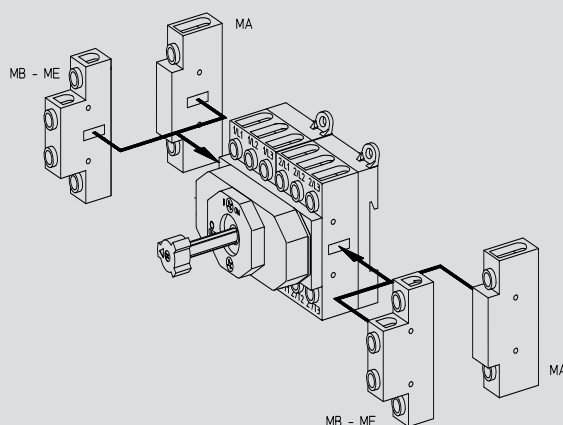


Switching programme module left module right	Type	Order code no. front mounting	Order code no. base mounting
Neutral contact Module MA early make/late break			
	H216	MAH2-16A01	MAH2-16A02
	H220	MAH2-20A01	MAH2-20A02
	H226	MAH2-26A01	MAH2-26A02
	H233	MAH2-33A01	MAH2-33A02
	H263	MAH2-63A01	MAH2-63A02
	H406	MAH4-06A01	MAH4-06A02
	H408	MAH4-08A01	MAH4-08A02
	H410	MAH4-10A01	MAH4-10A02
	H412	MAH4-12A01	MAH4-12A02
Auxiliary contact Module MB 1 n/o late make/early break + 1 n/c			
	H216	MBH2-11A01	MBH2-11A02
	H220	MBH2-11A01	MBH2-11A02
	H226	MBH2-11A01	MBH2-11A02
	H233	MBH2-11A01	MBH2-11A02
	H263	MBH4-11A01	MBH4-11A02
	H406	MBH4-11A01	MBH4-11A02
	H408	MBH4-11A01	MBH4-11A02
	H410	MBH4-11A01	MBH4-11A02
	H412	MBH4-11A01	MBH4-11A02
Auxiliary contact Module MC 1 n/o late make/early break + 1 n/c			
	H216	MCH2-11A01	MCH2-11A02
	H220	MCH2-11A01	MCH2-11A02
	H226	MCH2-11A01	MCH2-11A02
	H233	MCH2-11A01	MCH2-11A02
	H263	MCH4-11A01	MCH4-11A02
	H406	MCH4-11A01	MCH4-11A02
	H408	MCH4-11A01	MCH4-11A02
	H410	MCH4-11A01	MCH4-11A02
	H412	MCH4-11A01	MCH4-11A02
Auxiliary contact Module MD 2 n/o late make/early break			
	H216	MDH2-20A01	MDH2-20A02
	H220	MDH2-20A01	MDH2-20A02
	H226	MDH2-20A01	MDH2-20A02
	H233	MDH2-20A01	MDH2-20A02
	H263	MDH4-20A01	MDH4-20A02
	H406	MDH4-20A01	MDH4-20A02
	H408	MDH4-20A01	MDH4-20A02
	H410	MDH4-20A01	MDH4-20A02
	H412	MDH4-20A01	MDH4-20A02
Auxiliary contact Module ME 2 n/o late make/early break			
	H216	MEH2-20A01	MEH2-20A02
	H220	MEH2-20A01	MEH2-20A02
	H226	MEH2-20A01	MEH2-20A02
	H233	MEH2-20A01	MEH2-20A02
	H263	MEH4-20A01	MEH4-20A02
	H406	MEH4-20A01	MEH4-20A02
	H408	MEH4-20A01	MEH4-20A02
	H410	MEH4-20A01	MEH4-20A02
	H412	MEH4-20A01	MEH4-20A02

Additional modules for later attachment to switches 41300 / 41600 / 71300

Switching programme module left module right	Type	Order code no. front mounting	Order code no. base mounting
N-terminal MF			
	H216	MFH2-00A01	MFH2-00A02
	H220	MFH2-00A01	MFH2-00A02
	H226	MFH2-00A01	MFH2-00A02
	H233	MFH2-00A01	MFH2-00A02
	H263	MFH2-63A01	MFH2-63A02
	H406	MFH4-00A01	MFH4-00A02
	H408	MFH4-00A01	MFH4-00A02
	H410	MFH4-00A01	MFH4-00A02
	H412	MFH4-00A01	MFH4-00A02
PE-terminal MG			
	H216	MGH2-00A01	MGH2-00A02
	H220	MGH2-00A01	MGH2-00A02
	H226	MGH2-00A01	MGH2-00A02
	H233	MGH2-00A01	MGH2-00A02
	H263	MGH2-63A01	MGH2-63A02
	H406	MGH4-00A01	MGH4-00A02
	H408	MGH4-00A01	MGH4-00A02
	H410	MGH4-00A01	MGH4-00A02
	H412	MGH4-00A01	MGH4-00A02
Auxiliary contact Module MK 1 n/o late make/early break + 1 n/c Contacts with gold plating 5 µm			
	H216	MKH2-11A01	MKH2-11A02
	H220	MKH2-11A01	MKH2-11A02
	H226	MKH2-11A01	MKH2-11A02
	H233	MKH2-11A01	MKH2-11A02
	H263	MKH4-11A01	MKH4-11A02
	H406	MKH4-11A01	MKH4-11A02
	H408	MKH4-11A01	MKH4-11A02
	H410	MKH4-11A01	MKH4-11A02
	H412	MKH4-11A01	MKH4-11A02
Auxiliary contact Module ML 1 n/o late make/early break + 1 n/c Contacts with gold plating 5 µm			
	H216	MLH2-11A01	MLH2-11A02
	H220	MLH2-11A01	MLH2-11A02
	H226	MLH2-11A01	MLH2-11A02
	H233	MLH2-11A01	MLH2-11A02
	H263	MLH4-11A01	MLH4-11A02
	H406	MLH4-11A01	MLH4-11A02
	H408	MLH4-11A01	MLH4-11A02
	H410	MLH4-11A01	MLH4-11A02
	H412	MLH4-11A01	MLH4-11A02
Auxiliary contact Module MM 2 n/o late make/early break Contacts with gold plating 5 µm			
	H216	MMH2-20A01	MMH2-20A02
	H220	MMH2-20A01	MMH2-20A02
	H226	MMH2-20A01	MMH2-20A02
	H233	MMH2-20A01	MMH2-20A02
	H263	MMH4-20A01	MMH4-20A02
	H406	MMH4-20A01	MMH4-20A02
	H408	MMH4-20A01	MMH4-20A02
	H410	MMH4-20A01	MMH4-20A02
	H412	MMH4-20A01	MMH4-20A02
Auxiliary contact Module MN 2 n/o late make/early break Contacts with gold plating 5 µm			
	H216	MNH2-20A01	MNH2-20A02
	H220	MNH2-20A01	MNH2-20A02
	H226	MNH2-20A01	MNH2-20A02
	H233	MNH2-20A01	MNH2-20A02
	H263	MNH4-20A01	MNH4-20A02
	H406	MNH4-20A01	MNH4-20A02
	H408	MNH4-20A01	MNH4-20A02
	H410	MNH4-20A01	MNH4-20A02
	H412	MNH4-20A01	MNH4-20A02
Neutral terminal block cable link to connect the Neutral contact Modules (MA) on the 71400 Changeover Switch			
	H200	224234	224234
	H400	404111	404111

Accessories



FAZ2-8041

Additional top escutcheon plates

with additional inscription to be clipped on the escutcheon and padlock devices

Order code number

Escutcheon frame plate black, legend plate silver, without inscription (can be engraved)
 Escutcheon frame plate black, legend plate silver, inscription black, inscription FA 8... (see below)
 Escutcheon frame plate black, legend plate silver, inscription black, special engraving
 Escutcheon frame plate black, legend plate yellow, without inscription (can be engraved)
 Escutcheon frame plate black, legend plate yellow, inscription black, inscription FA 8... (see below)
 Escutcheon frame plate black, legend plate yellow, inscription black, special engraving
 Escutcheon frame plate black (without legend plate)

FAZ2 - 8000
FAZ2 - 8...
FAZ2 - (special no.)
FBZ2 - 8000
FBZ2 - 8...
FBZ2 - (special no.)
FAZ2

Legend plates for additional top escutcheon plates




Legend plate silver, without inscription (can be engraved)
 Legend plate silver, inscription black, inscription FA 8... (see below)
 Legend plate silver, inscription black, special engraving
 Legend plate yellow, without inscription (can be engraved)
 Legend plate yellow, inscription black, inscription FA 8... (see below)
 Legend plate yellow, inscription black, special engraving

FAS2 - 8000
FAS2 - 8...
FAS2 - (special no.)
FBS2 - 8000
FBS2 - 8...
FBS2 - (special no.)

Inscriptions for additional top escutcheon plates

FA 8000	FA 8001	FA 8002	FA 8003	FA 8013	FA 8026
FA 8027	FA 8028	FA 8029	FA 8030	FA 8031	FA 8037
FA 8039	FA 8040	FA 8041	FA 8044	FA 8045	FA 8046
FA 8047					

Modular shaft extensions for mounting forms with door interlock



H200

3...4 pole ON-OFF Switches

H200

6...8 pole ON-OFF Switches
3...4 pole Changeover Switches

H400

3...4 pole ON-OFF Switches

H400

6...8 pole ON-OFF Switches
3...4 pole Changeover Switches

Order code number



H200

H400

Dimension C (Internal depth: inside of door to top of DIN rail):

092 ... 107 mm	100 ... 115 mm	103 ... 117 mm	116 ... 130 mm	—	—
114 ... 132 mm	122 ... 140 mm	124 ... 142 mm	137 ... 155 mm	AVC2-1	AVC4-1
139 ... 157 mm	147 ... 165 mm	149 ... 167 mm	162 ... 180 mm	AVC2-2	AVC4-2
164 ... 182 mm	172 ... 190 mm	174 ... 192 mm	187 ... 205 mm	AVC2-3	AVC4-3
189 ... 207 mm	197 ... 215 mm	199 ... 217 mm	212 ... 230 mm	AVC2-4	AVC4-4

Accessories

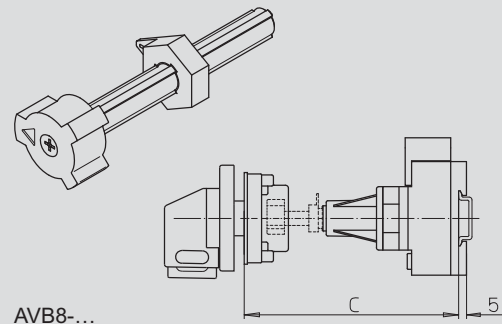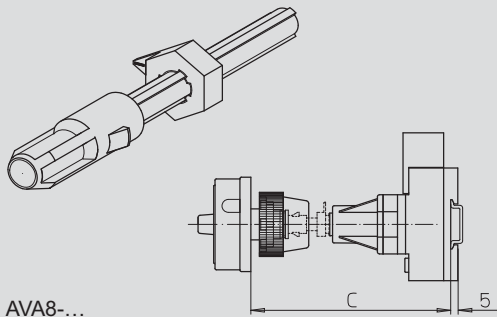

Metal shafts for mounting forms with door clutch / door interlock

H200	H200	H400	H400	Order code number
3...4 pole ON-OFF Switches	6...8 pole ON-OFF Switches 3...4 pole Changeover Switches	3...4 pole ON-OFF Switches	6...8 pole ON-OFF Switches 3...4 pole Changeover Switches	

Single hole front mounting

Dimension C (Internal depth: outside of door to top of DIN rail):


155 ... 173 mm	163 ... 181 mm	165 ... 183 mm	177 ... 195 mm	AVA8 - 065
174 ... 198 mm	182 ... 206 mm	184 ... 208 mm	196 ... 220 mm	AVA8 - 090
199 ... 223 mm	207 ... 231 mm	209 ... 233 mm	221 ... 245 mm	AVA8 - 115
224 ... 248 mm	232 ... 256 mm	234 ... 258 mm	246 ... 270 mm	AVA8 - 140
249 ... 273 mm	257 ... 281 mm	259 ... 283 mm	271 ... 295 mm	AVA8 - 165
274 ... 298 mm	282 ... 306 mm	284 ... 308 mm	296 ... 320 mm	AVA8 - 190
299 ... 323 mm	307 ... 331 mm	309 ... 333 mm	321 ... 345 mm	AVA8 - 215
324 ... 348 mm	332 ... 356 mm	334 ... 358 mm	346 ... 370 mm	AVA8 - 240
349 ... 373 mm	357 ... 381 mm	359 ... 383 mm	371 ... 395 mm	AVA8 - 265
374 ... 398 mm	382 ... 406 mm	384 ... 408 mm	396 ... 420 mm	AVA8 - 290
399 ... 423 mm	407 ... 431 mm	409 ... 433 mm	421 ... 445 mm	AVA8 - 315
424 ... 448 mm	432 ... 456 mm	434 ... 458 mm	446 ... 470 mm	AVA8 - 340
449 ... 473 mm	457 ... 481 mm	459 ... 483 mm	471 ... 495 mm	AVA8 - 365
474 ... 498 mm	482 ... 506 mm	484 ... 508 mm	496 ... 520 mm	AVA8 - 390
499 ... 523 mm	507 ... 531 mm	509 ... 533 mm	521 ... 545 mm	AVA8 - 415
524 ... 548 mm	532 ... 556 mm	534 ... 558 mm	546 ... 570 mm	AVA8 - 440
549 ... 573 mm	557 ... 581 mm	559 ... 583 mm	571 ... 595 mm	AVA8 - 465
574 ... 598 mm	582 ... 606 mm	584 ... 608 mm	596 ... 620 mm	AVA8 - 490
599 ... 623 mm	607 ... 631 mm	609 ... 633 mm	621 ... 645 mm	AVA8 - 515
624 ... 643 mm	632 ... 656 mm	634 ... 658 mm	646 ... 670 mm	AVA8 - 540

Four hole front mounting


Dimension C (Internal depth: inside of door to top of DIN rail):

140 ... 164 mm	148 ... 172 mm	150 ... 174 mm	162 ... 186 mm	AVB8 - 065
165 ... 189 mm	173 ... 197 mm	175 ... 199 mm	187 ... 211 mm	AVB8 - 090
190 ... 214 mm	198 ... 222 mm	200 ... 224 mm	212 ... 236 mm	AVB8 - 115
215 ... 239 mm	223 ... 247 mm	225 ... 249 mm	237 ... 261 mm	AVB8 - 140
240 ... 264 mm	248 ... 272 mm	250 ... 274 mm	262 ... 286 mm	AVB8 - 165
265 ... 289 mm	273 ... 297 mm	275 ... 299 mm	287 ... 311 mm	AVB8 - 190
290 ... 314 mm	298 ... 322 mm	300 ... 324 mm	312 ... 336 mm	AVB8 - 215
315 ... 339 mm	323 ... 347 mm	325 ... 349 mm	337 ... 361 mm	AVB8 - 240
340 ... 364 mm	348 ... 372 mm	350 ... 374 mm	362 ... 386 mm	AVB8 - 265
365 ... 389 mm	373 ... 397 mm	375 ... 399 mm	387 ... 411 mm	AVB8 - 290
390 ... 414 mm	398 ... 422 mm	400 ... 424 mm	412 ... 436 mm	AVB8 - 315
415 ... 439 mm	423 ... 447 mm	425 ... 449 mm	437 ... 461 mm	AVB8 - 340
440 ... 464 mm	448 ... 472 mm	450 ... 474 mm	462 ... 486 mm	AVB8 - 365
465 ... 489 mm	473 ... 497 mm	475 ... 499 mm	487 ... 511 mm	AVB8 - 390
490 ... 514 mm	498 ... 522 mm	500 ... 524 mm	512 ... 536 mm	AVB8 - 415
515 ... 539 mm	523 ... 547 mm	525 ... 549 mm	537 ... 561 mm	AVB8 - 440
540 ... 564 mm	548 ... 572 mm	550 ... 574 mm	562 ... 586 mm	AVB8 - 465
565 ... 589 mm	573 ... 597 mm	575 ... 599 mm	587 ... 611 mm	AVB8 - 490
590 ... 614 mm	598 ... 622 mm	600 ... 624 mm	612 ... 636 mm	AVB8 - 515
615 ... 639 mm	623 ... 647 mm	625 ... 649 mm	637 ... 661 mm	AVB8 - 540

Accessories



TCA/TCC



TCB/TCD

Terminal covers

Terminal covers can be used on front and base mountings. For the product line H200 terminal covers are not included since the switch is IP20 rated. Terminal covers are included with all Main/Off Switches of the H400 product line, and don't have to be ordered separately.

The variety of available switching programs requires different terminal covers. Please order the required quantities!

H216/H220/H226/H233

Switching programs from ... up to ...	Number	Order code number	Number	Order code number
41300 41340	1	TCA2	–	–
41400 41420	1	TCA2	1	TCB2
41600 41640	2	TCA2	–	–
41800 41800	2	TCA2	2	TCB2


H263

Switching programs from ... up to ...	Number	Order code number	Number	Order code number
41300 41340	1	TCC2	–	–
41400 41420	1	TCC2	1	TCD2



H406/H408/H410/H412

Switching programs from ... up to ...	Number	Order code number	Number	Order code number
41300 41340	1	TCA4	–	–
41400 41420	1	TCA4	1	TCB4
41600 41640	2	TCA4	–	–
41800 41800	2	TCA4	2	TCB4

Accessories



218098



MSH4

Assembly tool for single hole mounting
suitable for a fast assembly of escutcheons and padlock devices

Product line	Order code number
H200	218098

Assembly tool for terminal screws on H400 product line

Product line	Order code number
H400	MSH4


Mounting brackets for external mounting of enclosures (1 set)

M6 × 16



4 ×

mounting bracket




4 ×



4 ×



4 ×





Enclosure	Dimensions	Order code number
Sheet Metal enclosure	150 × 150 × 120 mm	SAX1
Sheet Metal enclosure	200 × 150 × 120 mm	SAX1
Sheet Metal enclosure	300 × 250 × 120 mm	SAX1
Stainless steel enclosure	150 × 150 × 120 mm	SBX1
Stainless steel enclosure	200 × 150 × 120 mm	SBX1
Stainless steel enclosure	300 × 250 × 120 mm	SBX1


Operator variants for mounting forms with padlock device

Operator		Colour escutcheon	Colour legend plate	Colour operator	Change of order code number
N-padlock device Suitable for product lines H200, H400 and K600		black grey yellow grey yellow	white white white white white	black grey red black black	 - - ...N1 - - ...N2 - - ...N4 - - ...N6 - - ...N7
M-padlock device Suitable for product lines H200, H400 and K600		black grey yellow grey yellow	white white white white white	black grey red black black	 - - ...M1 - - ...M2 - - ...M4 - - ...M6 - - ...M7
B-padlock device Suitable for product lines H400, K600 and K800		black black black	silver yellow black	black red black	 - - ...B1 - - ...B4 - - ...B8
H-padlock device Suitable for product lines H400, K600 and K800		black black black	silver yellow black	black red black	 - - ...H1 - - ...H4 - - ...H8
Padlockable with V-handle Suitable for product lines H200 and H400		black black	silver yellow	black red	 - - ...V1 - - ...V4

Installation mounting for 45 mm aperture in Panel/Distribution boards:

Padlockable with V-handle Suitable for product line H200		grey grey	silver yellow	black red	 - - ...V1 - - ...V4
Padlockable with V-handle (cover imprinted) Suitable for product line H400		grey yellow	grey yellow	black red	 - - ...V1 - - ...V4

Operator variants for mounting forms with escutcheon and handle

Operator		Colour escutcheon	Colour legend plate	Colour operator	Change of order code number
M-handle Suitable for product lines H200, H400 and K600		black grey white black black black	silver silver silver yellow silver black	black grey white red red black	 - - ...M1 - - ...M2 - - ...M3 - - ...M4 - - ...M5 - - ...M8
F-handle Suitable for product lines H200, H400 and K600		black grey white black black black	silver silver silver yellow silver black	black grey white red red black	 - - ...F1 - - ...F2 - - ...F3 - - ...F4 - - ...F5 - - ...F8
B-handle Suitable for product lines H200, H400 and K600		black grey white black black black	silver silver silver yellow silver black	black grey white red red black	 - - ...B1 - - ...B2 - - ...B3 - - ...B4 - - ...B5 - - ...B8
N-handle Suitable for product line H200		black grey white black black black	silver silver silver yellow silver black	black grey white red red black	 - - ...N1 - - ...N2 - - ...N3 - - ...N4 - - ...N5 - - ...N8
G-handle Suitable for product lines H400, K600 and K800		black black black black	silver yellow silver black	black red red black	 - - ...G1 - - ...G4 - - ...G5 - - ...G8
R-handle Suitable for product line H200		black grey white black black	silver silver silver yellow silver	black grey white red red	 - - ...R1 - - ...R2 - - ...R3 - - ...R4 - - ...R5

Installation mounting for 45 mm aperture in Panel/Distribution boards:

M-handle Suitable for product line H200		grey grey grey	silver silver yellow	black grey red	 - - ...M1 - - ...M2 - - ...M4
M-handle (cover imprinted) Suitable for product line H400		grey grey yellow	grey grey yellow	black grey red	 - - ...M1 - - ...M2 - - ...M4
N-handle Suitable for product line H200		grey grey grey	silver silver yellow	black grey red	 - - ...N1 - - ...N2 - - ...N4

Technical Data

General			H212	H216	H220	H226	H233	H263	H406	H408	H410	H412	K616	K830	
Standards			IEC 60947, EN 60947, IEC 60204, EN 60204, UL 508, CSA 22.2, No. 14												
Mechanical lifespan			>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁵	>10 ⁶	>10 ⁶	
Max. operating frequency / h			50	50	50	50	50	50	50	50	50	50	50	50	
Climatic resistance			damp heat, constant, to DIN IEC 60068-2-3 damp heat, cyclic, to DIN IEC 60068-2-30												
Ambient temperature															
open	min/max	°C	−25/+50												
enclosed	min/max	°C	−25/+40												
Mounting position			as required												
Mechanical shock resistance (shock duration 20 ms)			g	>10	> 25	> 25	> 25	> 25	> 25	> 25	> 25	> 25	> 25	>10	>10
Rated frequency			Hz	50 to 60 (other frequencies on request)											
Rated data															
Operational voltage U _e			V AC	690	690	690	690	690	690	690 ¹⁾	690 ¹⁾	690 ¹⁾	690 ¹⁾	690	690
Impulse withstand voltage U _{imp}			kV	4	6	6	6	6	6	8	8	8	8	6	6
Overvoltage category			III	III	III	III	III	III	III	III	III	III	III	III	
Pollution degree			3	3	3	3	3	3	3	3	3	3	3	3	3
Uninterrupted current I _u / I _{th} / I _{the}			A	20	20	25	32	40	63	63	80	100	125	160	315
Load carrying capacity in intermittent operation, class 12			AB	60% / 40% / 25% DF = 1.3 / 1.6 / 2 × I _e											
Breaking capacity															
220 – 240 V			A	150	150	250	300	330	500	500	550	600	800	900	1800
380 – 440 V			A	150	150	250	300	330	500	500	550	600	750	850	1650
500 – 690 V			A	100	100	150	190	220	270	270	285	300	320	340	350
Short-circuit rating															
Max. fuse			gL	20	20	25	35	40	63	63	80	100	125	160	315
Conditional short-circuit current			kA _{eff}	15	15	15	15	15	15	25	25	25	25	25	25
Isolating characteristics to EN 60947			up to ... V AC	440	690	690	690	690	690	1000	1000	1000	1000	690	690
Switching angle				90°	90°	90°	90°	90°	90°	90°	90°	90°	90°	90°	90°
Contacts (current paths)			max	4	8	8	8	8	4	8	8	8	8	8	8
Current heat loss per contact at I _u			W	0.8	0.8	0.8	1.8	2.1	3.0	3.0	4.1	5.5	6.9	11	28.5
Terminal capacity															
solid or stranded	min	mm ²	1	1	1	1	1	4	4	4	4	4	95 ²⁾	185 ²⁾	
	max	mm ²	2.5	10	10	10	10	16	50	50	50	50	95 ²⁾	185 ²⁾	
flexible or multiwire including ferrule	min	mm ²	1	0.75	0.75	0.75	0.75	2.5	2.5	2.5	2.5	2.5	95 ²⁾	185 ²⁾	
	max	mm ²	2.5	6	6	6	6	10	35	35	35	35	95 ²⁾	185 ²⁾	
American Wire Gauge			AWG	14	8	8	8	8	6	1/0	1/0	1/0	1/0	4/0	350MCM
Thread dimensions for terminal screw				M3,5	M4	M4	M4	M4	M4	M6	M6	M6	M6	M10	M12
Terminal tightening torque			min max	Nm Nm	0.8 1.5	1.2 2.5	1.2 2.5	1.2 2.5	1.2 2.5	2.5 6.0	2.5 6.0	2.5 6.0	2.5 6.0	10 20	14 25

¹⁾ 1000 V, AC-20, no load switching

²⁾ with terminal extensions for cable lug connection

Technical Data

Rated data			H212	H216	H220	H226	H233	H263	H406	H408	H410	H412	K616	K830
Operational current I _e														
AC-21A		A	20	20	25	32	40	63	63	80	100	125	160	315
AC-22A	220 – 500 V	A	20	20	25	32	40	63	63	80	100	125	160	315
	660 – 690 V	A	16	16	20	32	40	63	63	80	100	100	125	125
AC-23A (cos φ=0.65) 400 V		A	10	12	16	24	32	47	47	65	80	97	120	285
UL / CSA General Use	300 V AC	A	15	20	25	30	40	60	63	80	100	100	175	240
	600 V AC	A	15	20	25	30	40	60	63	80	100	100	175	240
Operational power at 50 – 60 Hz, 3 phase														
AC-23A	220 – 240 V	kW	3	3	4	5.5	7.5	15	15	18.5	22	30	37	75
	380 – 440 V	kW	5.5	5.5	7.5	11	15	22	22	30	37	45	75	132
	500 V	kW	5.5	5.5	7.5	11	15	22	22	30	37	45	90	132
	660 – 690 V	kW	5.5	5.5	7.5	11	15	22	22	30	37	37	55	55
AC-3	220 – 240 V	kW	2.2	2.2	3	4	5.5	11	11	15	22	30	22	37
	380 – 440 V	kW	3.7	3.7	5.5	7.5	11	18.5	18.5	22	30	37	45	55
	500 V	kW	3.7	3.7	5.5	7.5	11	18.5	18.5	30	37	45	45	55
	660 – 690 V	kW	3.7	3.7	5.5	7.5	11	18.5	18.5	22	30	37	45	55
UL / CSA	110 – 120 V AC	HP	1	1	1.5	2	3	5	5	7.5	10	15	15	25
	208 V AC	HP	2	2	3	5	7.5	10	10	10	15	15	15	30
	220 – 240 V AC	HP	2	2	3	5	7.5	15	15	20	25	30	15	30
	440 – 480 V AC	HP	3	3	5	10	15	30	30	30	30	40	40	50
	550 – 600 V AC	HP	5	5	5	10	15	40	30	30	30	40	50	50

Rated data (auxiliary contacts)

Operational voltage U_e			V AC	—	500	500	500	500	500	500	500	500	500	500
Uninterrupted current $I_u / I_{th} / I_{the}$			A	—	10	10	10	10	16	16	16	16	20	20
Operational current I_e														
AC-21A		A	—	10	10	10	10	10	10	10	10	10	20	20
AC-15	110 – 240 V	A	—	2.5	2.5	2.5	2.5	6	6	6	6	6	6	6
	380 – 440 V	A	—	1.5	1.5	1.5	1.5	4	4	4	4	4	4	4
	500 V	A	—	1	1	1	1	1.5	1.5	1.5	1.5	1.5	2	2
UL / CSA General Use	600 V AC	A	—	10	10	10	10	10	10	10	10	10	20	20
Heavy Pilot Duty			—	A600	A600	A600	A600	A600	A600	A600	A600	A600	A600	A600
Short-circuit rating Max. fuse			gL	—	10	10	10	10	16	16	16	16	20	20
Conditional short-circuit current			kA _{eff}	—	3	3	3	3	3	3	3	3	10	10
Terminal capacity flexible or multiwire			min	—	1	1	1	1	1	1	1	1	1	1
including ferrule			max	—	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
American Wire Gauge			AWG	—	14	14	14	14	14	14	14	14	12	12

Conformity

The Disconnect Switches H and K conform to the regulations of the EC guideline 73/23 EEC 'Electrical equipment for application within certain voltage limits' – specified as directive for low voltage devices.

The conformity is proved by the complete compliance of the harmonized European standards

- EN 60947-1
- EN 60947-3
- EN 60947-5-1
- EN 60204-1.

Salzer Electric products are developed, manufactured and tested according to these standards.

The CE marking on all our products prove the conformity to the directives.



The Disconnect Switches H and K are approved according to UL 508 and CSA 22.2, No. 14.



Utilization Categories

Utilization categories for Switches, Disconnectors, Switch-Disconnectors and Fuse-Combination Units

Type of Current	Utilization Category		Typical applications
	Frequent operation	Occasional operation	
AC	AC-20A *	AC-20B *	Making and breaking without load
	AC-21A	AC-21B	Switching resistive loads including low overloads
	AC-22A	AC-22B	Switching mixed resistive and inductive loads, including low overloads
	AC-23A	AC-23B	Switching motors and other highly inductive loads
DC	DC-20A	DC-20B	Making and breaking without load
	DC-21A	DC-21B	Switching resistive loads including low overloads
	DC-22A	DC-22B	Switching mixed resistive and inductive loads, including low overloads (e. g. shunt motors)
	DC-23A	DC-23B	Switching highly inductive loads (e. g. series motors)

* The application of these utilization categories isn't permitted in the USA.

Category AC-23 includes occasional switching of individual motors. The utilization categories in the above table do not apply to an equipment normally used to start, accelerate and/or stop individual motors. The utilization categories for such an equipment are dealt with the following table:

Type of Current	Utilization Category	Typical applications
AC	AC-2	Slip-ring motors: starting, plugging ¹⁾ , switching off
	AC-3	Squirrel-cage motors: starting, switching off running motors
	AC-4	Squirrel-cage motors: starting, plugging ¹⁾ , inching ²⁾
DC	DC-3	Shunt motors: starting, plugging ¹⁾ , inching ²⁾ , dynamic breaking of d.c. motors
	DC-4	Series motors: starting, plugging ¹⁾ , inching ²⁾ , dynamic breaking of d.c. motors

¹⁾ Plugging is understood to mean stopping or reversing the motor rapidly by reversing motor primary connections while the motor is running.

²⁾ Inching (jogging) is understood to mean energizing a motor once or repeatedly for short periods to obtain small movements of the driven mechanism.

Note: The switching of rotor circuits, capacitors or tungsten filament lamps shall be subject to special agreements between manufacturer and user.

Rated currents of three-phase motors (approximate figures for squirrel-cage motors)

Motor rating			Motor full-load current			Fuse starting			Motor full-load current			Fuse starting		
kW	cos φ	Percent efficiency η %	A	D.O.L. A	Y/Δ A	A	D.O.L. A	Y/Δ A	A	D.O.L. A	Y/Δ A	A	D.O.L. A	Y/Δ A
			230 V						400 V					
0.06	0.7	58	0.37	2	—				0.21	2	—			
0.09	0.7	60	0.54	2	—				0.31	2	—			
0.12	0.7	60	0.72	4	2				0.41	2	—			
0.18	0.7	62	1.04	4	2				0.6	2	—			
0.25	0.7	62	1.4	4	2				0.8	4	2			
0.37	0.72	66	2	6	4				1.1	4	2			
0.55	0.75	69	2.7	10	4				1.5	4	2			
0.75	0.79	74	3.2	10	4				1.9	6	4			
1.1	0.81	74	4.6	10	6				2.6	6	4			
1.5	0.81	74	6.3	16	10				3.6	6	4			
2.2	0.81	78	8.7	20	10				5	10	6			
3	0.82	80	11.5	25	16				6.6	16	10			
4	0.82	83	14.8	32	16				8.5	20	10			
5.5	0.82	86	19.6	32	25				11.3	25	16			
7.5	0.82	87	26.4	50	32				15.2	32	16			
11	0.84	87	38	80	40				21.7	40	25			
15	0.84	88	51	100	63				29.3	63	32			
18.5	0.84	88	63	125	80				36	63	40			
22	0.84	92	71	125	80				41	80	50			
30	0.85	92	96	200	100				55	100	63			
37	0.86	92	117	200	125				68	125	80			
45	0.86	93	141	250	160				81	160	100			
55	0.86	93	173	250	200				99	200	125			
75	0.86	94	233	315	250				134	200	160			
90	0.86	94	279	400	315				161	250	200			
110	0.86	94	342	500	400				196	315	200			
132	0.87	95	401	630	500				231	400	250			
160	0.87	95	486	630	630				279	400	315			
200	0.87	95	607	800	630				349	500	400			
250	0.87	95	—	—	—				437	630	500			
315	0.87	96	—	—	—				544	800	630			
400	0.88	96	—	—	—				683	1000	800			
			500 V						690 V					
0.06	0.7	58	0.17	2	—				0.12	2	—			
0.09	0.7	60	0.25	2	—				0.18	2	—			
0.12	0.7	60	0.33	2	—				0.24	2	—			
0.18	0.7	62	0.48	2	—				0.35	2	—			
0.25	0.7	62	0.7	2	—				0.5	2	—			
0.37	0.72	66	0.9	2	2				0.7	2	—			
0.55	0.75	69	1.2	4	2				0.9	4	2			
0.75	0.79	74	1.5	4	2				1.1	4	2			
1.1	0.81	74	2.1	6	4				1.5	4	2			
1.5	0.81	74	2.9	6	4				2.1	6	4			
2.2	0.81	78	4	10	4				2.9	10	4			
3	0.82	80	5.3	16	6				3.8	10	4			
4	0.82	83	6.8	16	10				4.9	16	6			
5.5	0.82	86	9	20	16				6.5	16	10			
7.5	0.82	87	12.1	25	16				8.8	25	10			
11	0.84	87	17.4	32	20				12.6	25	16			
15	0.84	88	23.4	50	25				17	32	20			
18.5	0.84	88	28.9	50	32				20.9	32	25			
22	0.84	92	33	63	32				23.8	50	25			
30	0.85	92	44	80	50				32	63	32			
37	0.86	92	54	100	63				39	80	50			
45	0.86	93	65	125	80				47	80	63			
55	0.86	93	79	160	80				58	100	63			
75	0.86	94	107	200	125				78	160	100			
90	0.86	94	129	200	160				93	160	100			
110	0.86	94	157	250	160				114	200	125			
132	0.87	95	184	250	200				134	250	160			
160	0.87	95	224	315	250				162	250	200			
200	0.87	95	279	400	315				202	315	250			
250	0.87	95	349	500	400				253	400	315			
315	0.87	96	436	630	500				316	500	400			
400	0.88	96	547	800	630				396	630	400			

The rated motor currents are for standard 1500 r.p.m. motors with normal inner and outer surface cooling
 Fuse: This table applies to "slow" or "gL"
 D.O.L. starting: Maximum starting current: 6 × rated current. Maximum starting time: 5 sec.
 Y/Δ starting: Maximum starting current: 2 × rated current. Maximum starting time: 15 sec.














Degree of Protection / IP Codes

A coding system is defined by IEC 529 / EN60529 for the classification of degrees of protection provided by enclosures of electrical equipment against solid objects and water. This coding comprises the letters 'IP' followed by a two digit code as follows:

IP 6 6

Defines protection against solid objects and access to hazardous parts.	Defines protection against water.
--	--

Degrees of protection indicated by a number up to and including "6" implies compliance with the requirements for all lower numbers. For a code with a second digit of 7 or 8, a second code must be stated to specify protection against water jets or spray, e. g. IP66/ IP67/ IP68.

1 st digit	Protection against solid objects and access to hazardous parts	2 nd digit	Protection against water
0	No protection.	0	No protection.
1	 No ingress by solid objects ≥ 50 mm dia nor access to hazardous parts with the back of the hand.	1	 Vertically falling drops of water shall have no harmful effect.
2	 No ingress by solid objects ≥ 12.5 mm dia nor access to hazardous parts with a finger.	2	 Vertically falling drops of water shall have no harmful effect when the enclosure is tilted at any angle up to 15° from vertical.
3	 No ingress by solid objects ≥ 2.5 mm dia nor access to hazardous parts with a tool.	3	 Water sprayed at up to 60° from the vertical shall have no harmful effect.
4	 No ingress by solid objects ≥ 1.0 mm dia nor access to hazardous parts with a wire.	4	 Water splashed from any direction shall have no harmful effect.
5	 Dust protected. Ingress of dust is not completely prevented, but there should be no harmful deposits. No access to hazardous parts with a wire.	5	 Jets of water projected from any direction shall have no harmful effect.
6	 Dust tight. No ingress of dust. No access to hazardous parts with a wire.	6	 Strong jets of water projected from any direction shall have no harmful effect.
1B	 Test finger penetration to a maximum of 80 mm must not contact hazardous parts.	7	 Temporary immersion in water shall not result in ingress of harmful quantities of water.
		8	 Continuous immersion in water shall not result in ingress of harmful quantities of water.



GERMANY

Sälzer Electric GmbH

Matthiasstraße 16
57482 Wenden

T +49 (0) 27 62 - 6 14-110
F +49 (0) 27 62 - 6 14-100

info@salzer.de
www.saelzer.com



GREAT BRITAIN

Salzer UK Ltd.

44 Edison Road
Aylesbury Bucks.
HP19 8TE

T +44 (0) 12 96 - 39 99 92
F +44 (0) 12 96 - 39 22 29

info@salzeruk.co.uk
www.saelzer.com



U.S.A. / CANADA / MEXICO

Salzer USA Corporation

3802 N. 54th Street
Mesa, AZ 85215

T +1 480-325-2690
F +1 480-985-9663

info@salzerusa.com
www.saelzer.com



AUSTRIA

Schmachtl GmbH
Pummererstrasse 36
4020 Linz

T +43 (0) 7 32 - 76 46-0
F +43 (0) 7 32 - 78 50 36

office.linz@schmachtl.at
www.schmachtl.at



BELGIUM



LUXEMBURG

Bintz technics N. V.
Brixtonlaan 25
Business Park
1930 Zaventem

T +32 (0) 2 - 720 49 16
F +32 (0) 2 - 720 37 50

info@bintz.be
www.bintz.be



CZECHIA



SLOVAKIA

WAPRO spol. s r.o.
Rumunská 27
796 01 Prostějov

T +420 582 334 676
F +420 582 334 677

info@wapro.cz
www.wapro.cz



DENMARK

Gycom Danmark A/S
Vallørækken 26
Valløby
4600 Køge

T +45 - 56 26 66 35
F +45 - 56 26 77 78

gycomdk@gycom.com
www.gycom.dk



FINLAND



ESTONIA



LATVIA

UTU POWEL OY
Box 33
04251 Kerava

T +358 - 9 - 2746 411
F +358 - 9 - 2746 4141

komponentit@utu.eu
www.urhotuominen.fi



IRELAND

MCC Controls Ltd.
Robinhood Business Park
Robinhood Rd.
22 Dublin

T +353 (0) 1 - 4 50 64 50
F +353 (0) 1 - 4 50 61 04

sales@mcc-controls.com
www.mcc-controls.com



ITALY

Telestar S. r. l.
Via C. Colombo, 13
22069 Rovellasca (CO)

T +39 (0) 02 96 74 02 68
F +39 (0) 02 96 74 02 73

telestar@telestar-automation.it
www.telestar-automation.it



KUWAIT

The United Towers
Trading & Contracting Est.
Old Khaitan,
Block 45+46, Building 12
KWT 13157 Office No.1,
Mezzanine

T +965 - 24745960
F +965 - 24727452

theunitedtowers@yahoo.com



NETHERLANDS

Solar Nederland B.V.
Effect 5
6921 RG Duiven

T +31 (0) 26 - 3 65 22 29
F +31 (0) 26 - 3 65 22 20

industrie@solarnederland.nl
www.solarnederland.nl



NORWAY

EFA ELEKTRO A. S.
Postboks 593
1411 Kolbotn

T +47 - 6681 2400
F +47 - 6680 0478

post@efa.no
www.efa.no



SINGAPORE

Electrimec Asia Pacific Pte Ltd
No.9 Toh Guan Road East
ALLIANCE Building # 03-01
Singapore 608604

T +65 - 6896 2979
F +65 - 6896 2925

elecmecc@singnet.com.sg



SOUTH AFRICA

Waco Industries
11, Cleveland Road
Cleveland – Johannesburg

T +27 (0) 11 - 677 2500
F +27 (0) 11 - 677 2608

wacobuy@voltex.co.za
www.wacoelec.co.za



SPAIN

Euromatel S. L.
Avenida Real de Pinto, 87
Nave II-A
28021 Madrid

T +34 - 91 - 3 58 92 70
F +34 - 91 - 3 58 92 95

info@euromatel.es
www.euromatel.es



SWEDEN

Gycom Svenska AB
Box 1203
183 12 Täby

T +46 - 8 - 562 011 00
F +46 - 8 - 792 06 54

info@gycom.se
www.gycom.se




SWITZERLAND

EHS Elektrotechnik AG
Industriestrasse 26
8604 Volketswil

T +41 (0) 44 - 908 40 50
F +41 (0) 44 - 908 40 55

info@ehs.ch
www.ehs.ch

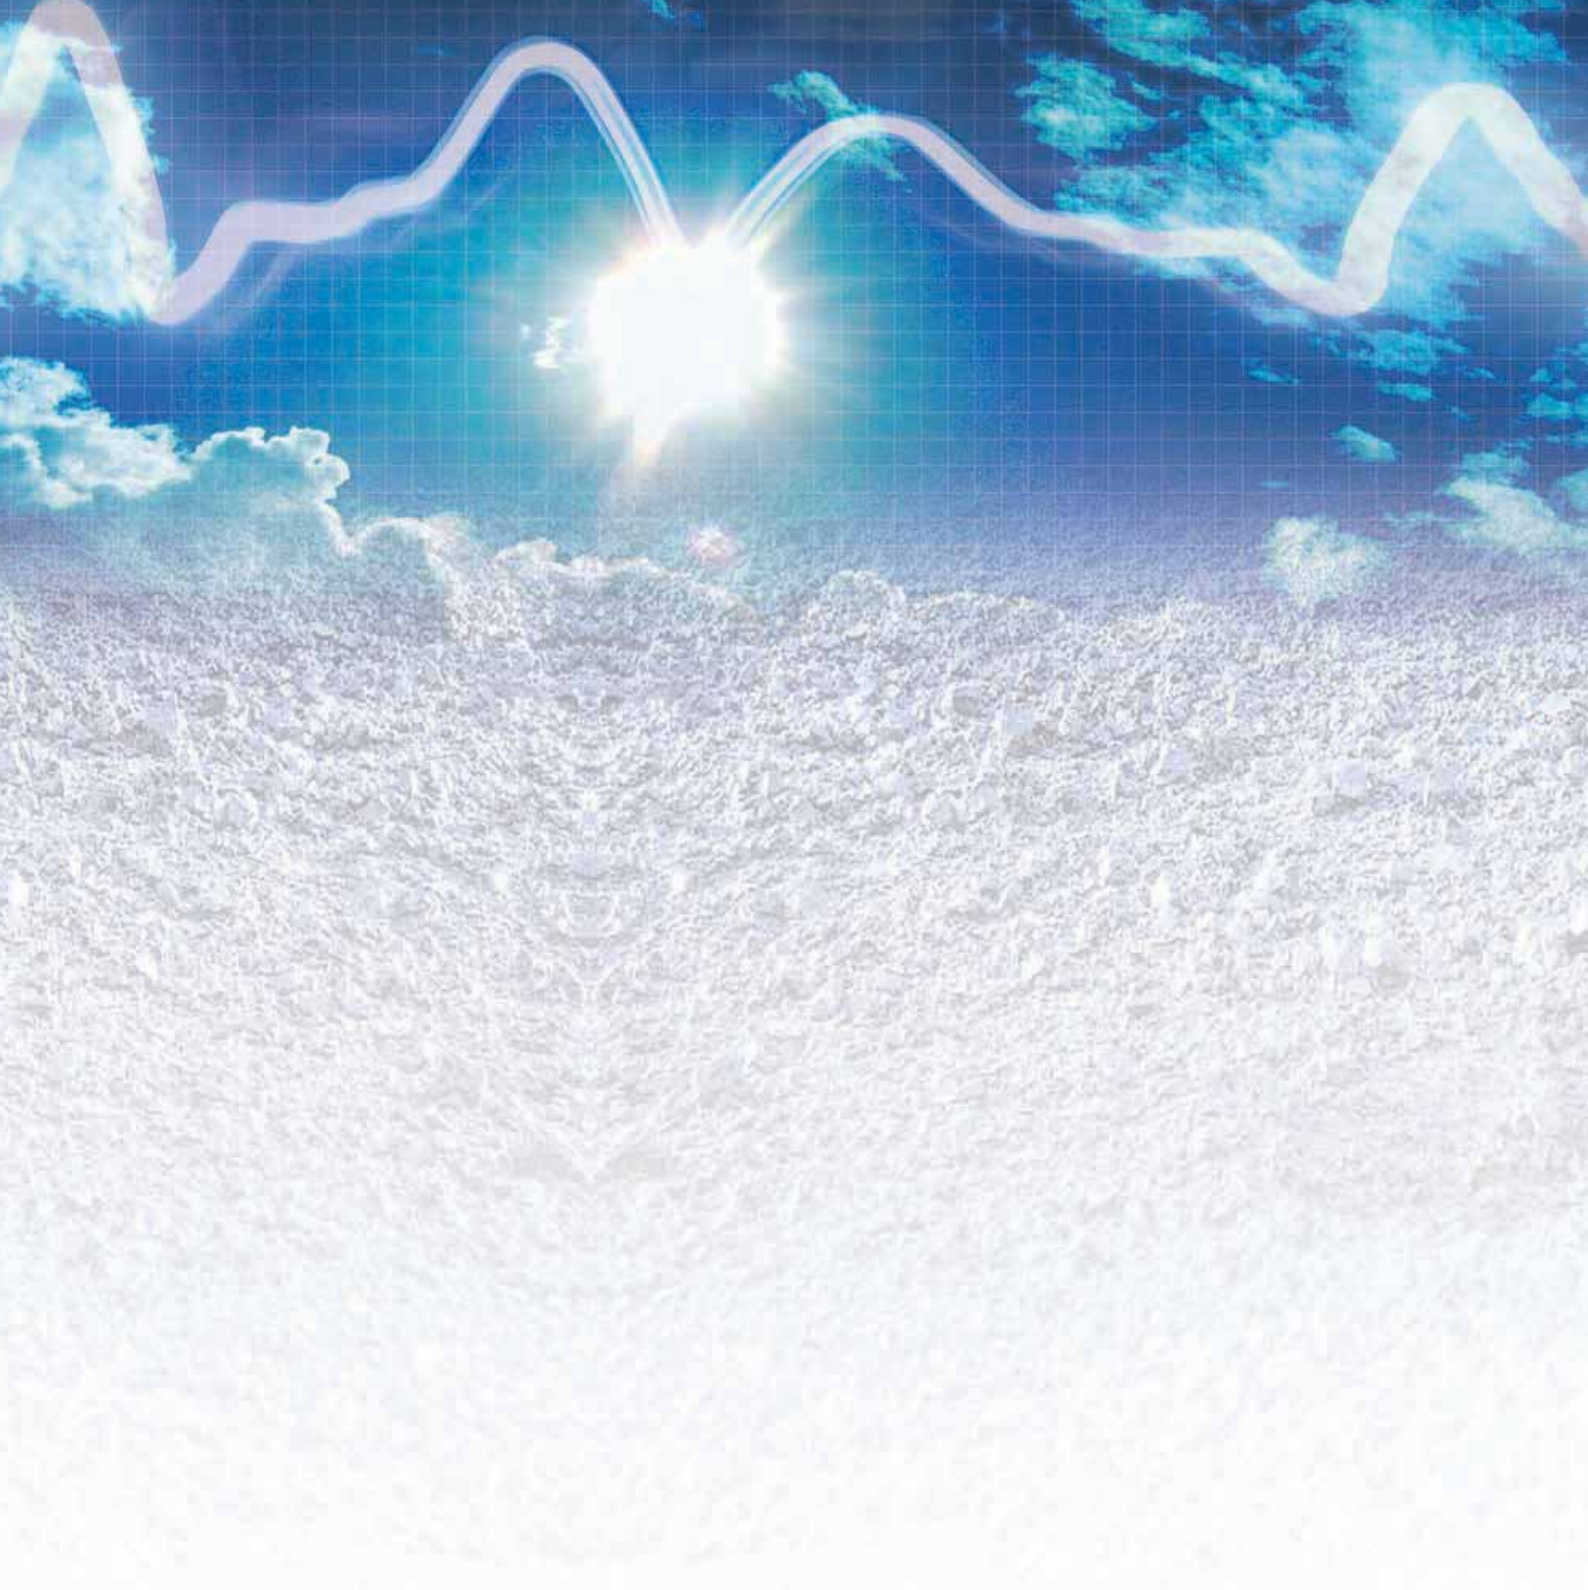

sälzer

Sälzer Electric GmbH
Matthiasstraße 16
57482 Wenden
www.saelzer.com

Headquarters:
Tel. +49 (0) 27 62/ 614-110
Fax +49 (0) 27 62/ 614-100
sales@salzer.de

Technical Support:
Tel. +49 (0) 37 37/ 87-0
Fax +49 (0) 37 37/ 87-226
support@salzer.de